



# Future Linear Colliders


Frank Tecker – CERN

- Physics motivation
- Generic Linear Collider Layout
- **ILC** (International Linear Collider)
- **CLIC** (Compact Linear Collider)
- CTF3 (CLIC Test Facility)
- Conclusion

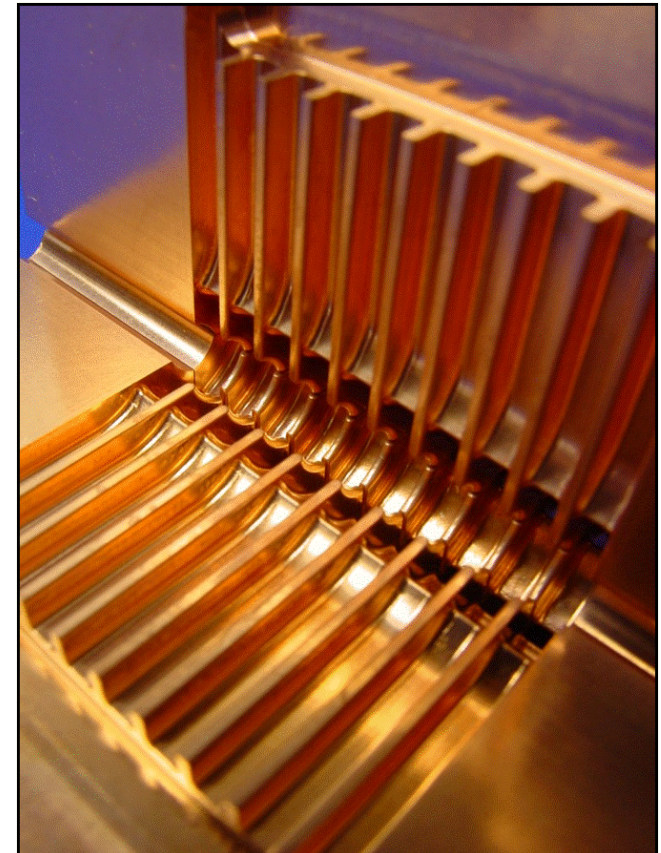


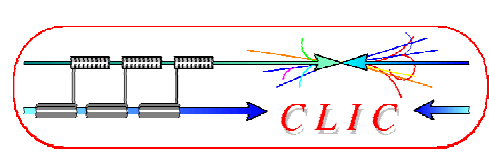

# Path to higher energy

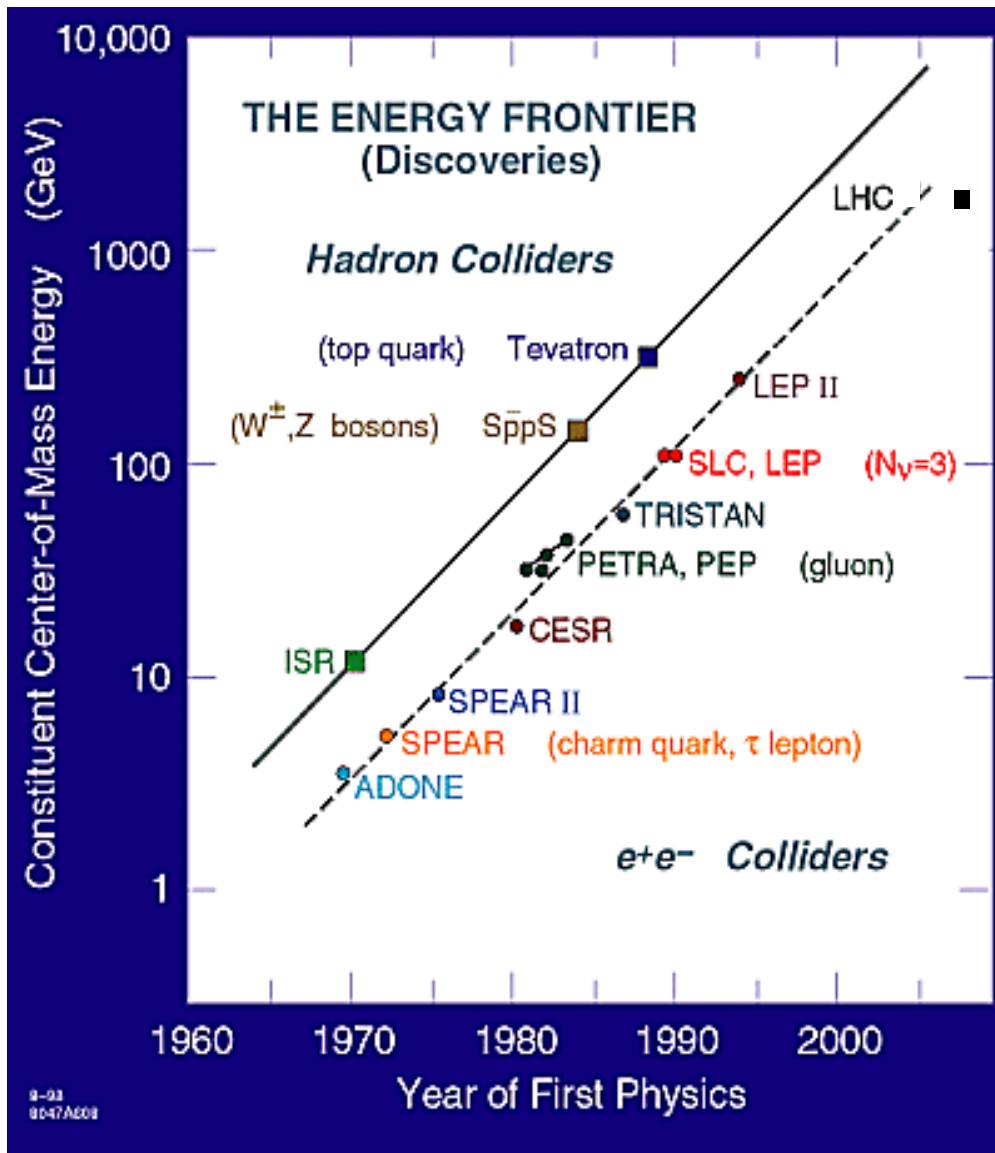



- History:
  - Energy constantly increasing with time
  - Hadron Collider at the energy frontier
  - Lepton Collider for precision physics
- LHC coming online very soon
- Consensus to build Lin. Collider with  $E_{cm} > 500$  GeV to complement LHC physics (*European strategy for particle physics by CERN Council*)

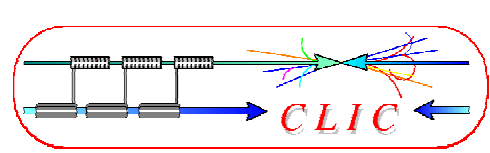

# Lepton vs. Hadron Collisions



LHC:  $H \rightarrow ZZ \rightarrow 4\mu$

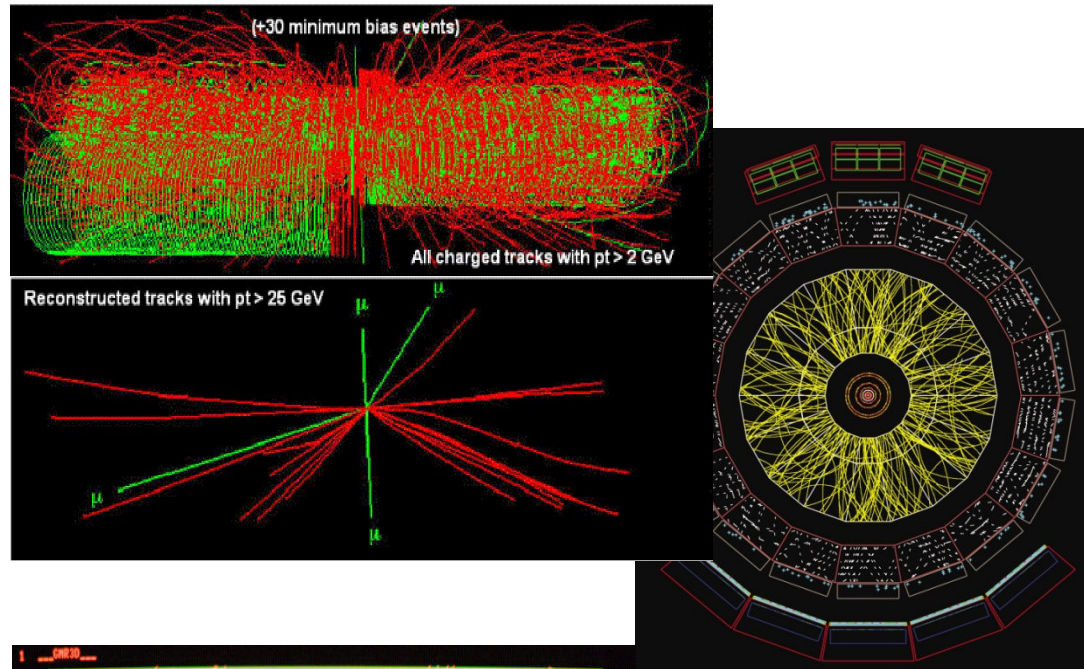


ALICE:  
Ion event




LEP event:  
 $Z^0 \rightarrow 3 \text{ jets}$

## Hadron Collider (p, ions):

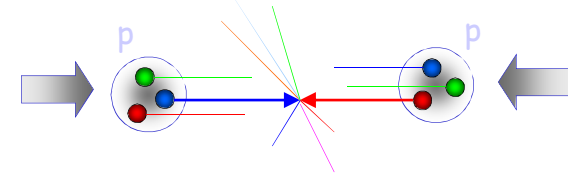


- Composite nature of protons
- Can only use  $p_t$  conservation
- Huge QCD background

## Lepton Collider:

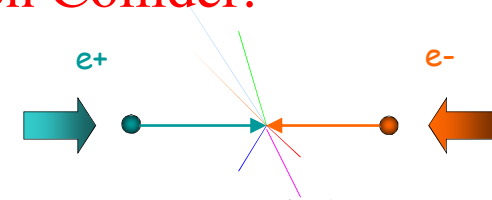

- Elementary particles
- Well defined initial state
- Beam polarization
- produces particles democratically
- Momentum conservation eases decay product analysis



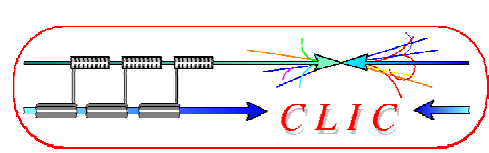

# TeV $e^+e^-$ physics



- **Higgs physics**

- Tevatron/LHC should discover Higgs (or something else)
- LC explore its properties in detail

- **Supersymmetry**

- LC will complement the LHC particle spectrum

- **Extra spatial dimensions**



- **New strong interactions**

- ...


=> a lot of **new territory** to discover **beyond the standard model**

- **“Physics at the CLIC Multi-TeV Linear Collider”**  
CERN-2004-005

- **“ILC Reference Design Report – Vol.2 – Physics at the ILC”**  
[www.linearcollider.org/rdr](http://www.linearcollider.org/rdr)

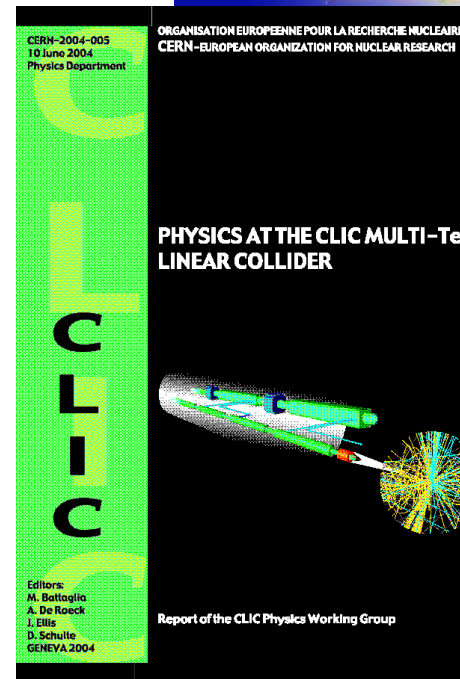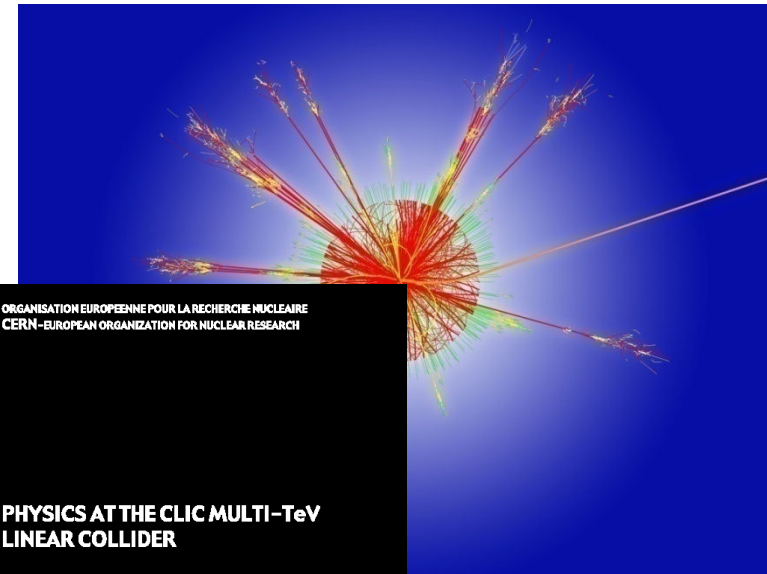



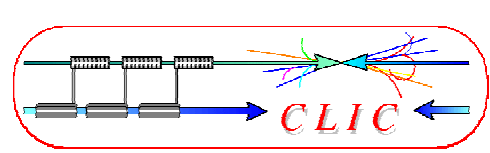

# The LEP collider



- LEP (Large Electron Positron collider) was installed in LHC tunnel
- e+ e- circular collider (27 km) with  $E_{cm}=200$  GeV


- Problem for any ring:  
**Synchrotron radiation**


- Emitted power:  
scales with  $E^4$  !!  
and  $1/m_0^3$  (much less  
for heavy particles)

- This energy loss  
must be replaced  
by the RF system !!

- particles lost 3% of  
their energy each turn!

$$P = \frac{2}{3} \frac{r_e c}{(m_0 c^2)^3} \frac{E^4}{\rho^2}$$


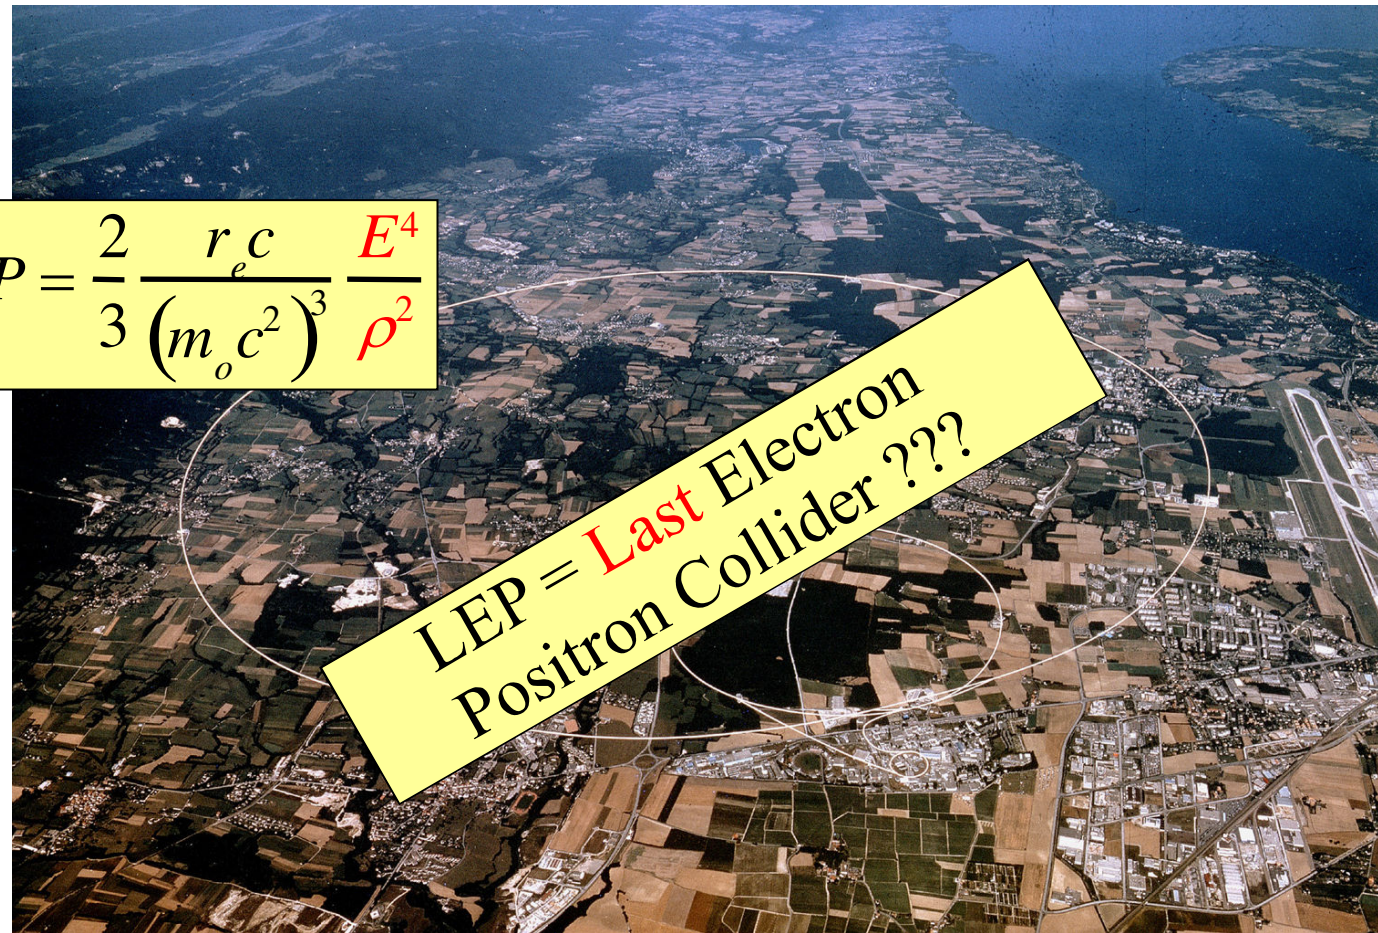


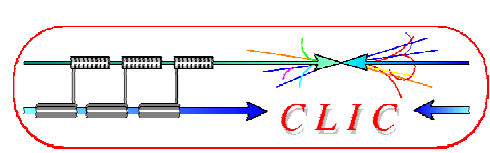


# The next lepton collider




- Solution: **LINEAR COLLIDER**
- avoid synchrotron radiation
- no bending magnets, huge amount of cavities and RF

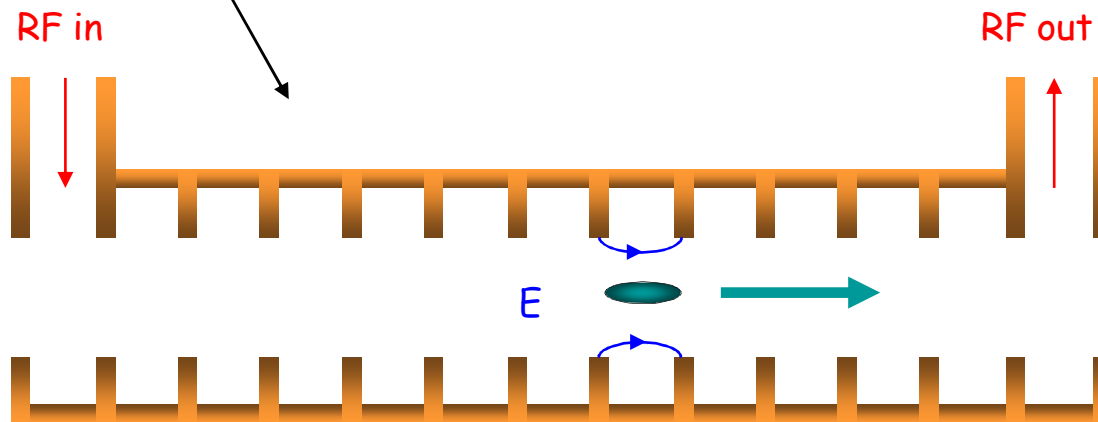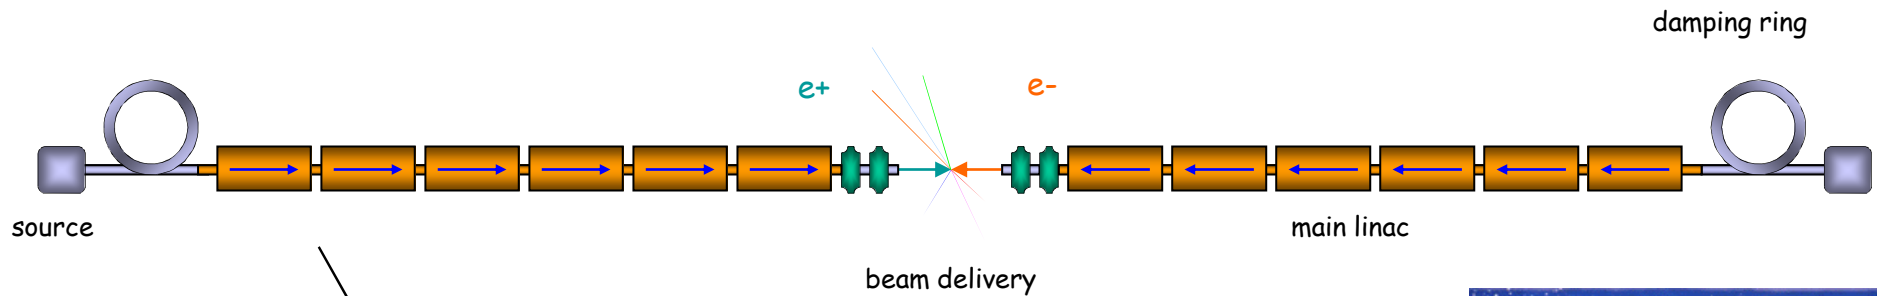

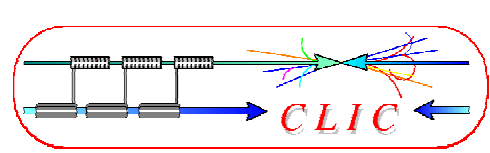

# Linear Collider vs. Ring

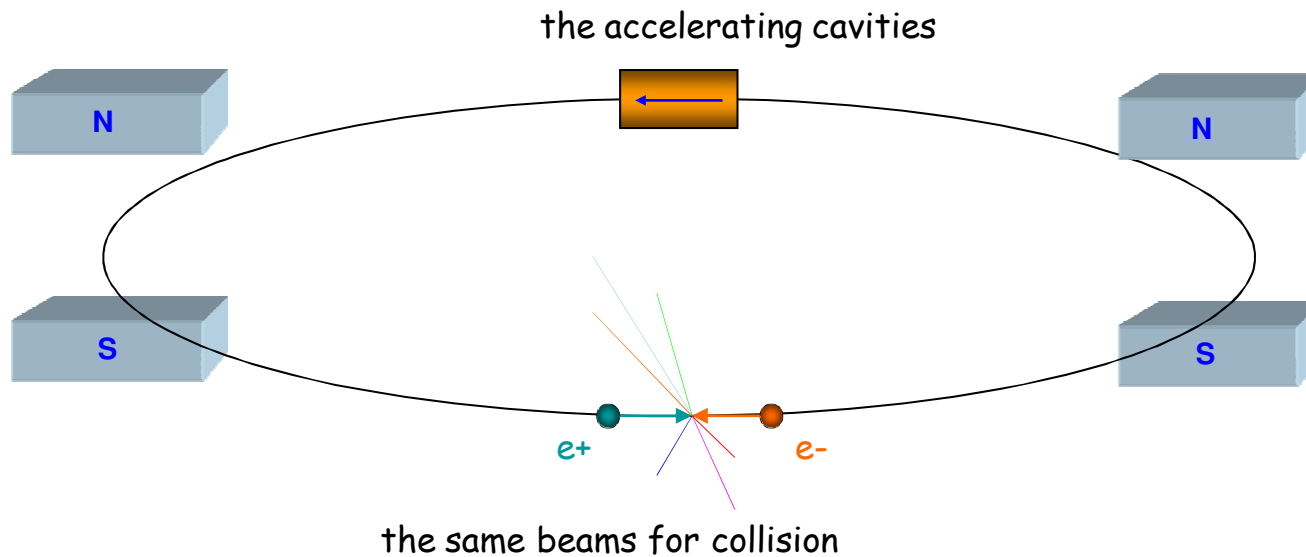


## Storage rings:

- accelerate + collide every turn
- 're-use' RF + 're-use' particles
- ⇒ efficient

## Linear Collider:

- one-pass acceleration + collision  
⇒ need
- high gradient
- small beam size
- to reach high event rate (Luminosity)



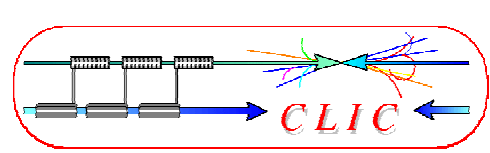

# What matters in a linear collider ? ...

Energy reach


$$E_{cm} = 2 F_{fill} L_{linac} G_{RF}$$



 High gradient




Luminosity

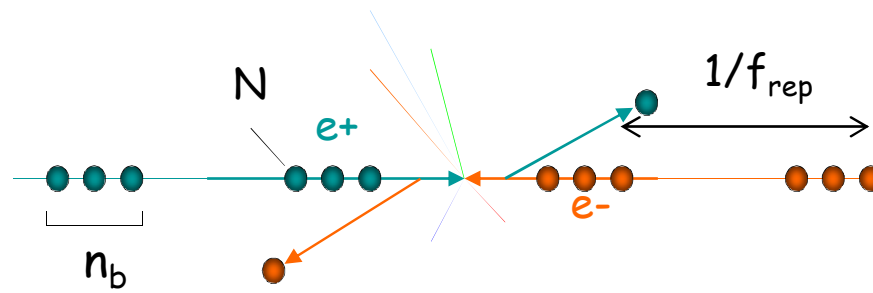
$$L = \frac{n_b N^2 f_{rep}}{4\pi\sigma_x^* \sigma_y^*} \times H_D \propto \frac{\eta_{beam}^{AC} P_{AC}}{\epsilon_y^{1/2}} \frac{\delta_{BS}^{1/2}}{E_{cm}}$$



$\sigma_{x,y}$  = transverse beam size




-  Acceleration efficiency  $\eta$
-  Generation and preservation of small emittance  $\epsilon$ 
  - damping rings, alignment, stability, wake-fields
-  Extremely small beam spot at collision point
  - beam delivery system, stability

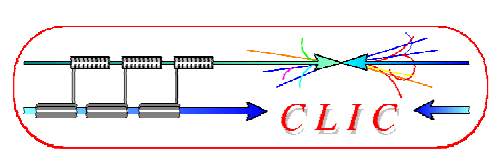


# Generic Linear Collider



C.Pagani

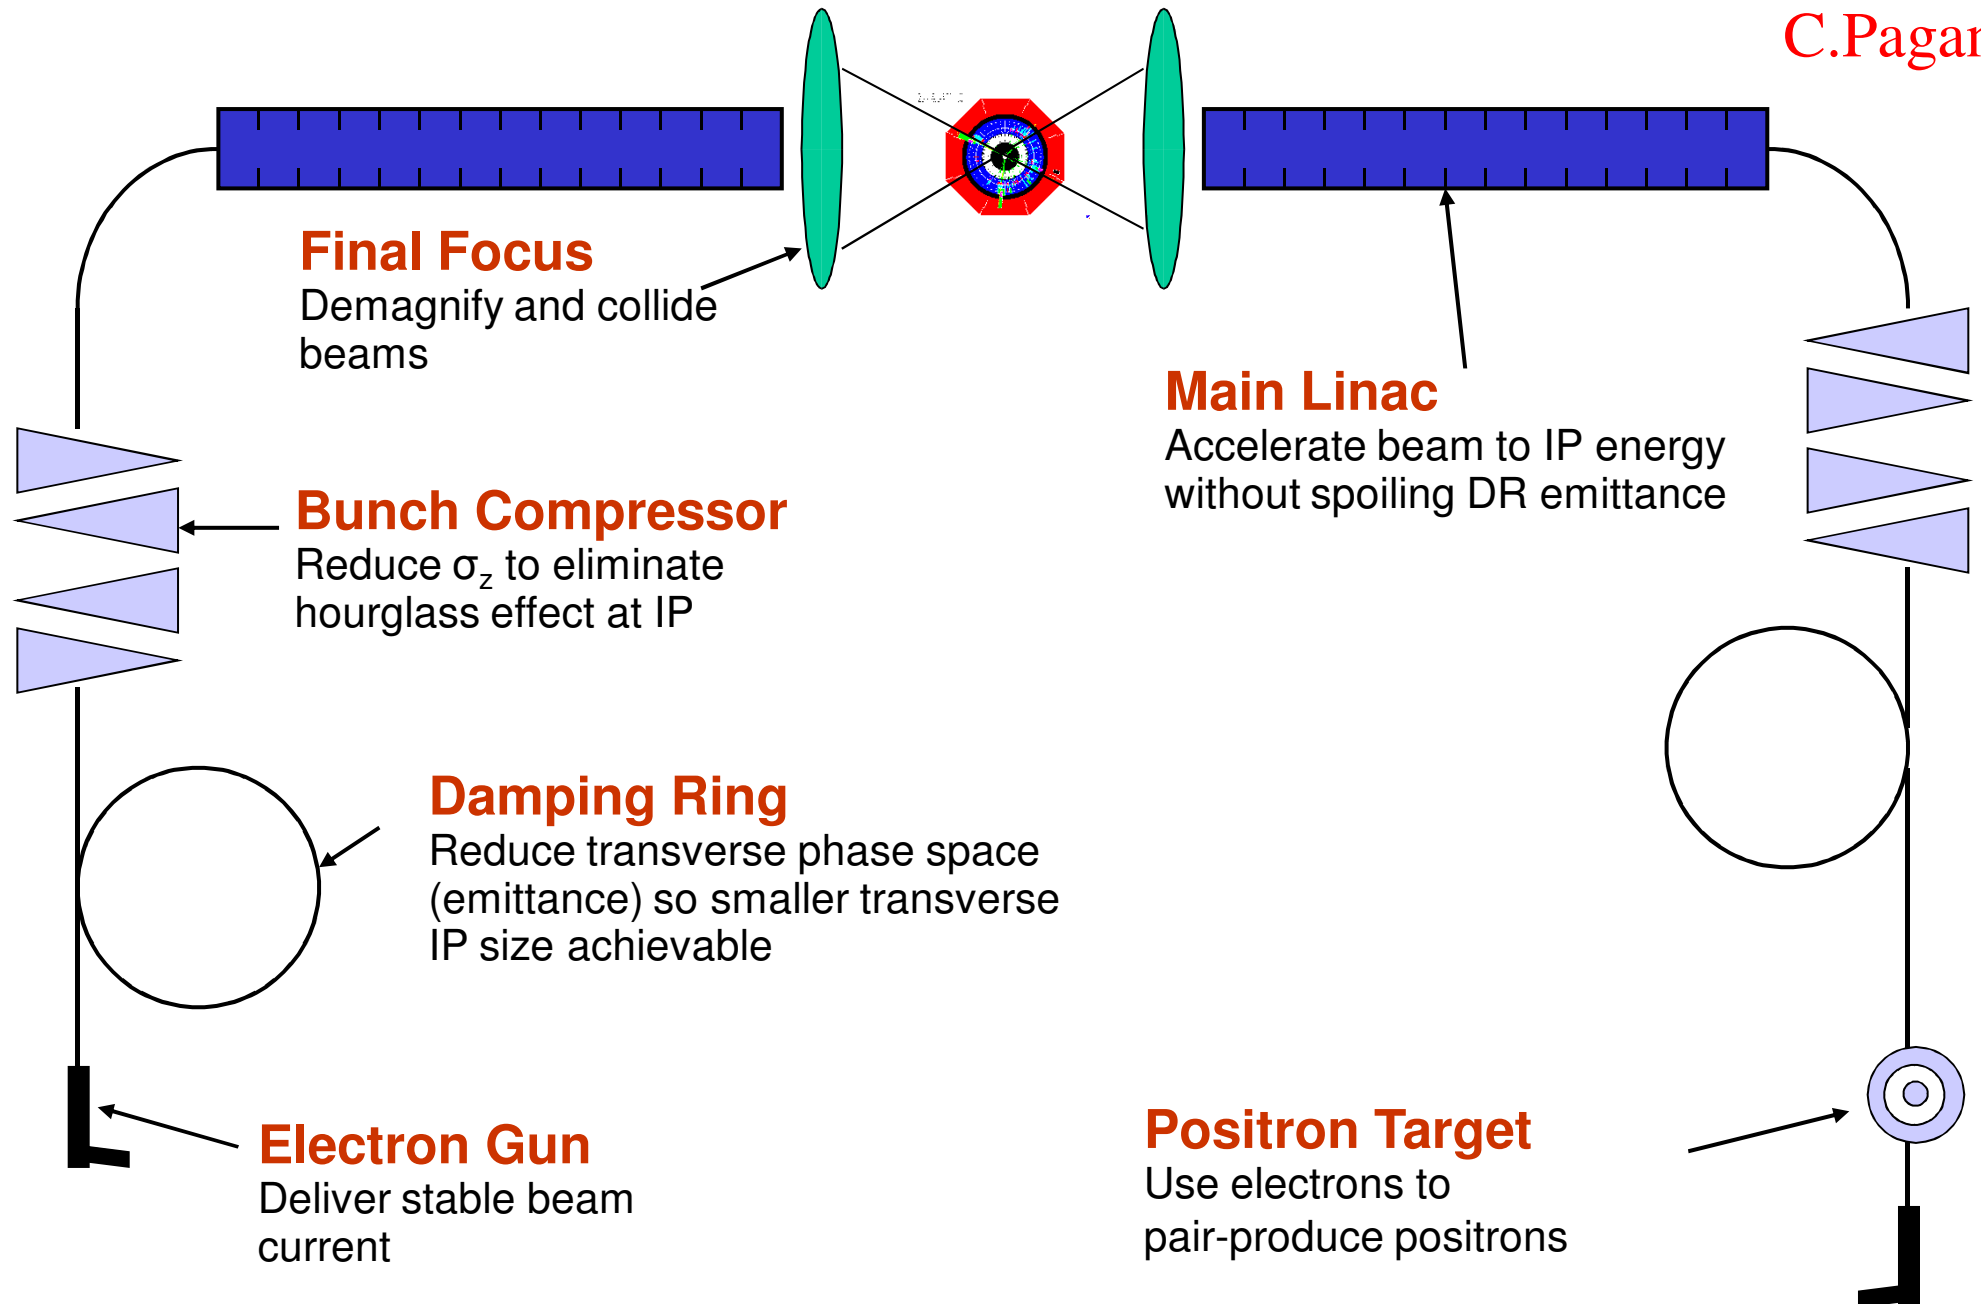


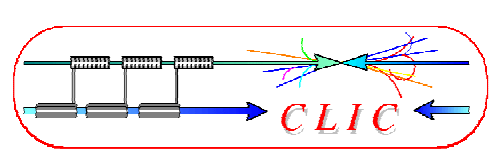

# First Linear Collider: SLC



## SLC – Stanford Linear Collider

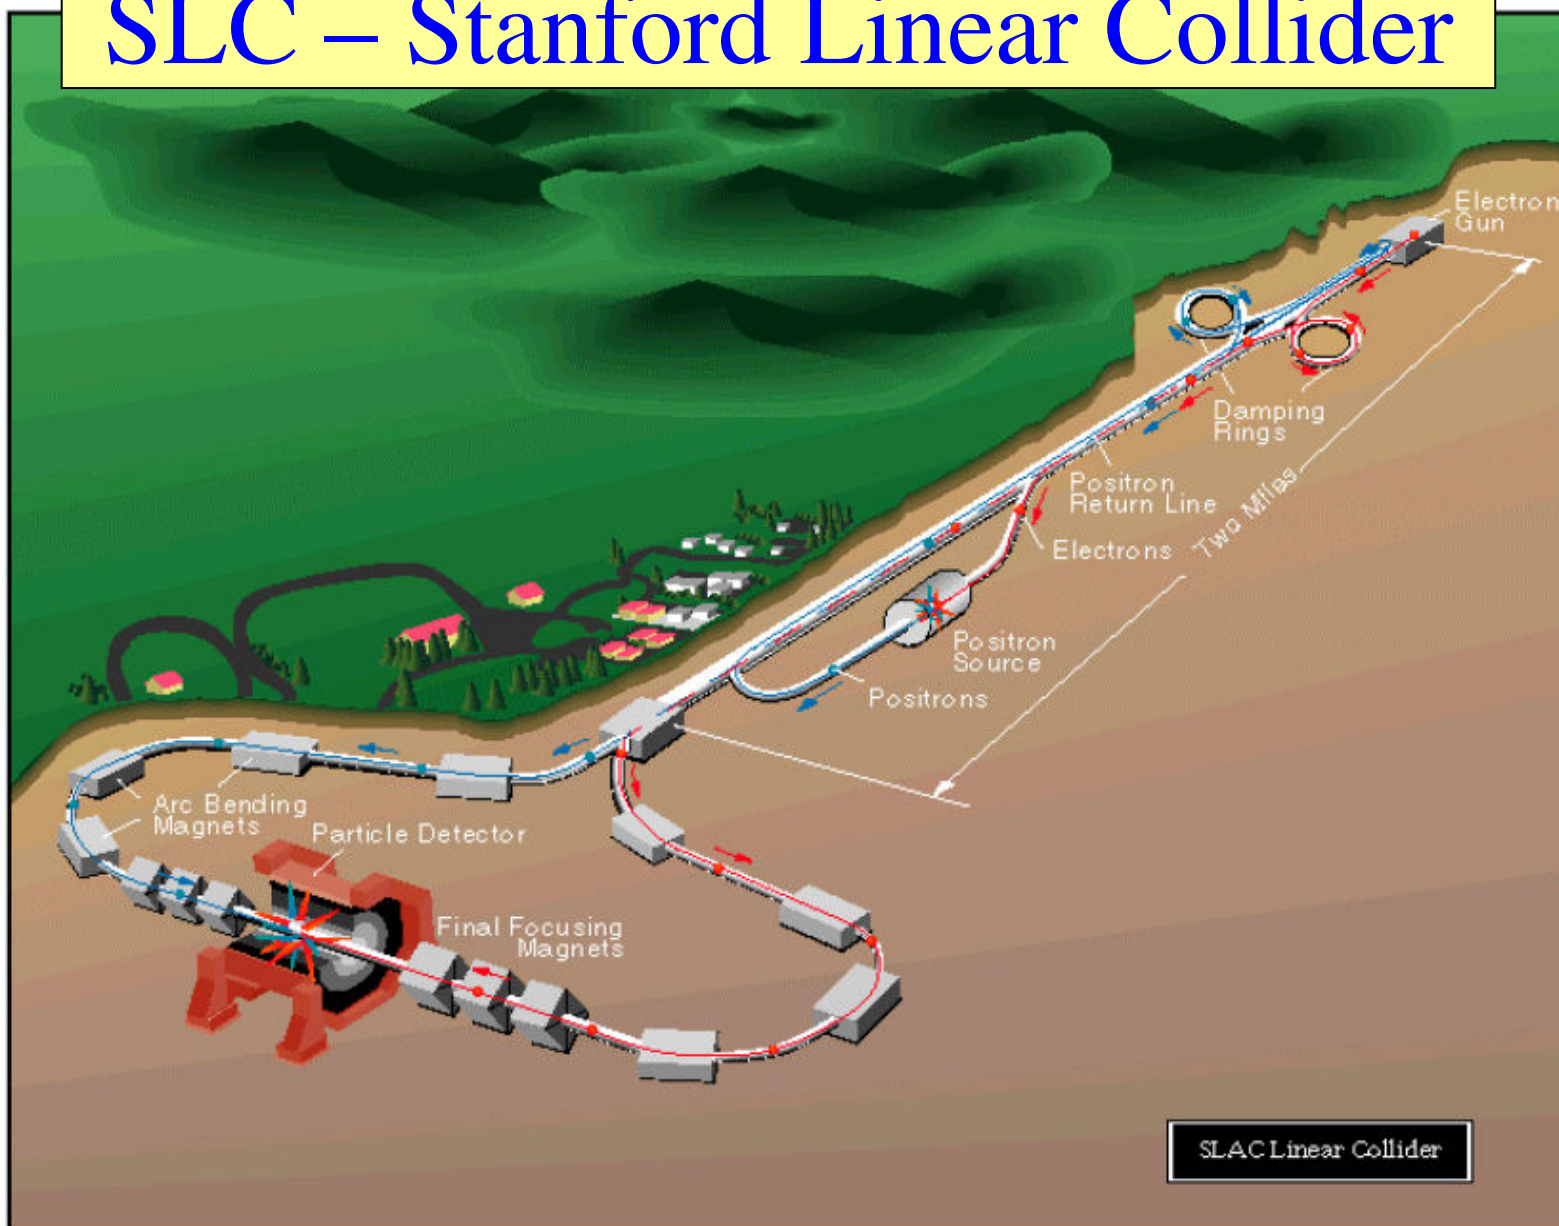

Built to study the  $Z^0$  and demonstrate linear collider feasibility

Energy = 92 GeV


Luminosity =  $2e30$

Has all the features of a 2nd gen. LC except both  $e^+$  and  $e^-$  used the same linac

A 10% prototype!

T.Raubenheimer



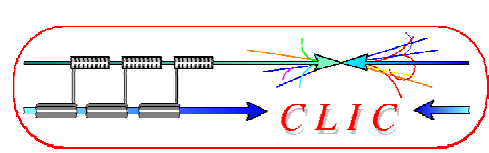

# Linear Collider projects





## ILC (International Linear Collider)

- Technology decision Aug 2004
- **Superconducting** technology
- 1.3 GHz RF frequency
- ~31 MV/m accelerating gradient
- **500 GeV** centre-of-mass energy
- upgrade to **1 TeV** possible

## CLIC (Compact Linear Collider)

- **normalconducting** technology
- **multi-TeV** energy range (nom. 3 TeV)

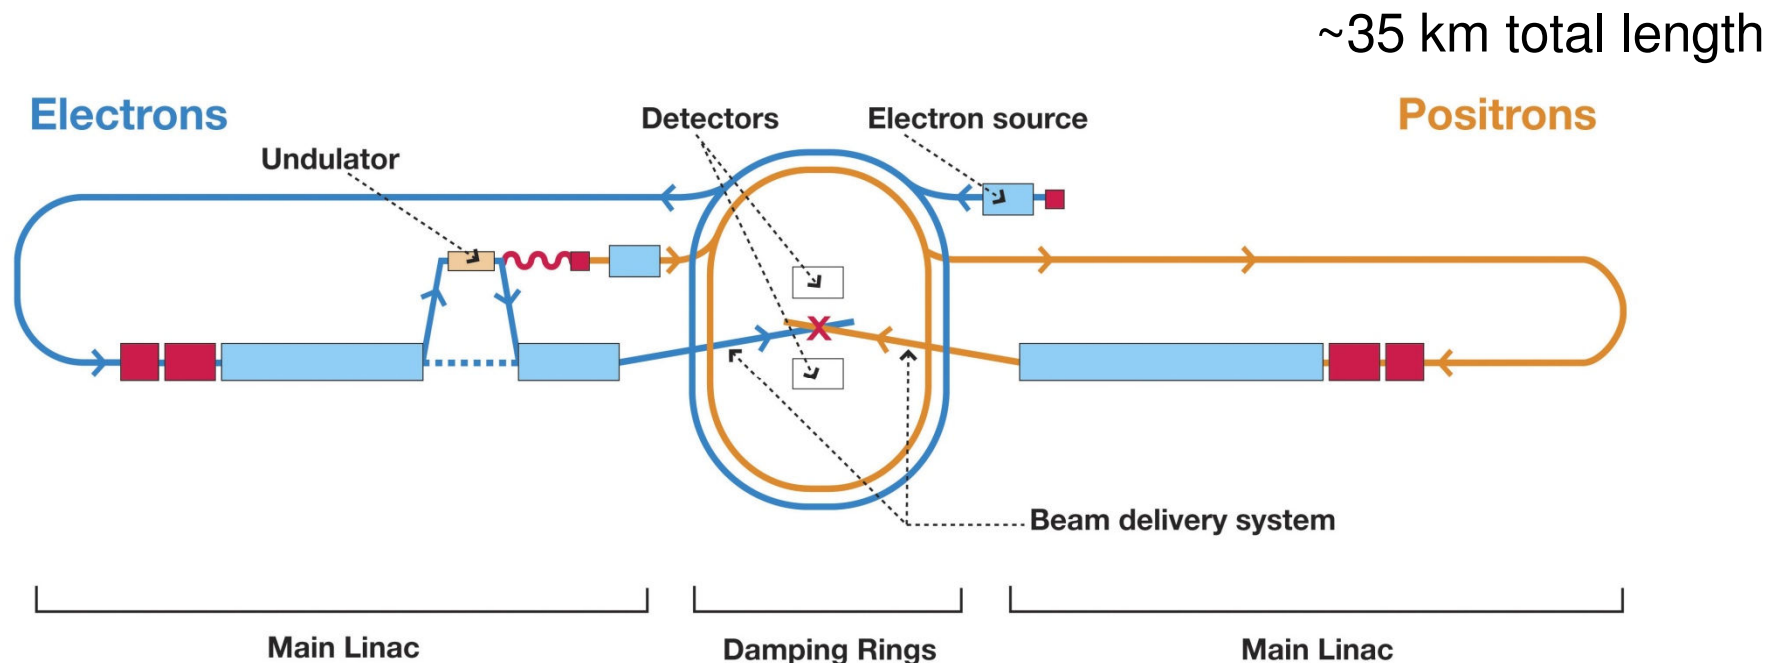

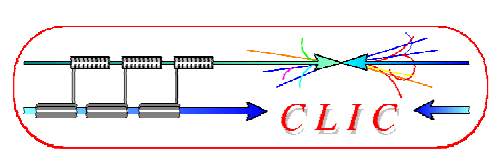


# Parameter comparison




	SLC	TESLA	ILC	J/NLC	CLIC
<b>Technology</b>	NC	Supercond.	Supercond.	NC	NC
<b>Gradient [MeV/m]</b>	20	25	31.5	50	100
<b>CMS Energy E [GeV]</b>	92	500-800	500-1000	500-1000	500-3000
<b>RF frequency <math>f</math> [GHz]</b>	2.8	1.3	1.3	11.4	12.0
<b>Luminosity <math>L</math> [<math>10^{33} \text{ cm}^{-2}\text{s}^{-1}</math>]</b>	0.003	34	20	20	21
<b>Beam power <math>P_{beam}</math> [MW]</b>	0.035	11.3	10.8	6.9	5
<b>Grid power <math>P_{AC}</math> [MW]</b>		140	230	195	130
<b>Bunch length <math>\sigma_z^*</math> [mm]</b>	~1	0.3	0.3	0.11	0.03
<b>Vert. emittance <math>\gamma\epsilon_y</math> [<math>10^{-8}\text{m}</math>]</b>	300	3	4	4	2.5
<b>Vert. beta function <math>\beta_y^*</math> [mm]</b>	~1.5	0.4	0.4	0.11	0.1
<b>Vert. beam size <math>\sigma_y^*</math> [nm]</b>	650	5	5.7	3	2.3

Parameters (except SLC) at 500 GeV

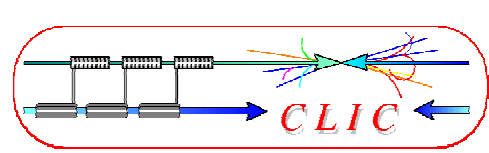

# ILC Global Design Effort

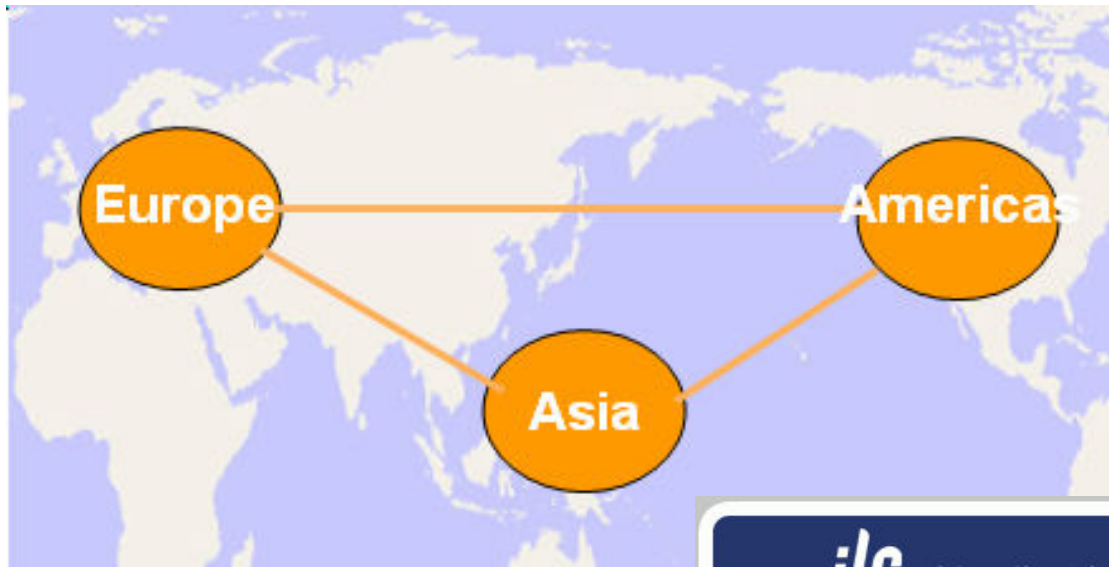

- ~700 contributors from 84 institutes in the RDR

- Web site: [www.linearcollider.org](http://www.linearcollider.org)

ILC-REPORT-2007-01  
 AAI-PUB-2007-002  
 CHEP A07-001 (CHEP/KNU)  
 CLNS 07/1991  
 Cockcroft-07-04  
 DESY 07-046  
 FERMILAB-TM-2382-AD-CD-DO-E-FESS-TD  
 JAI-2007-001  
 JINR Dubna-E9-2007-39  
 JLAB-R-2007-01  
 KEK Report 2007-1  
 LNF-07/9(NT)  
 SLAC-R-857

INTERNATIONAL LINEAR COLLIDER

REFERENCE DESIGN REPORT

2007

APRIL, 2007

[FOR COLLABORATORS](#) | [FOR THE PRESS](#) | [FOR COMMUNICATORS](#) | [FOR STUDENTS AND EDUCATORS](#)


SEARCH  [GO](#)

[What is the ILC?](#)  
[Global Design Effort](#)  
[ILC Doc&Agenda Servers](#)  
[Selected Talks](#)  
[Reports and Statements](#)  
[ILC Jobs](#)  
[ILC in the News](#)  
[Images & Graphics](#)  
[Around the World](#)  
[Calendar](#)


**Current News**  
 From *Daily Herald* | 31 July 2007  
 Getting people to understand, support Fermilab's effort  
 'A quest to bring a multibillion-dollar high-energy physics lab to Batavia could pump millions of dollars into the local and state economy as well as pave the way for new manufacturing and technology jobs across the country. But few people realize that...'  
 .....

**Features**  
[ILC NewsLine](#) | 2 August 2007  
  
 High grades for HIGrade  
 .....



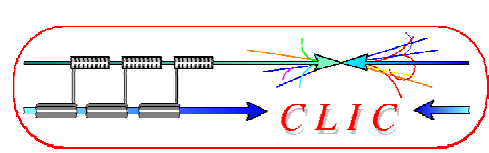



# ILC Schematic

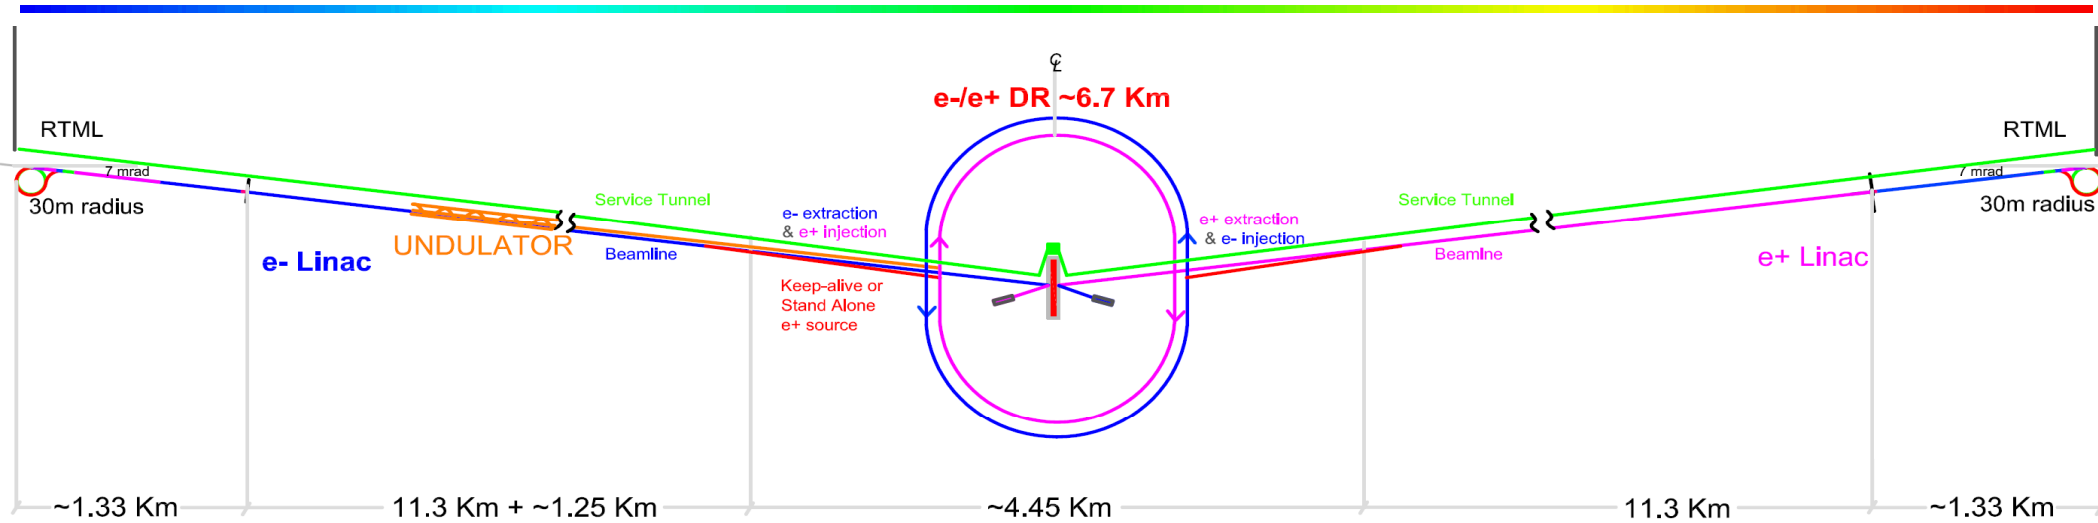

Schematic Layout of the 500 GeV Machine

- **Two 250 GeV linacs** arranged to produce nearly head on  $e^+e^-$  collisions
  - Single IR with 14 mrad crossing angle
- **Centralized injector**
  - Circular 6.7 km damping rings
  - Undulator-based positron source
- **Dual tunnel** configuration for safety and availability

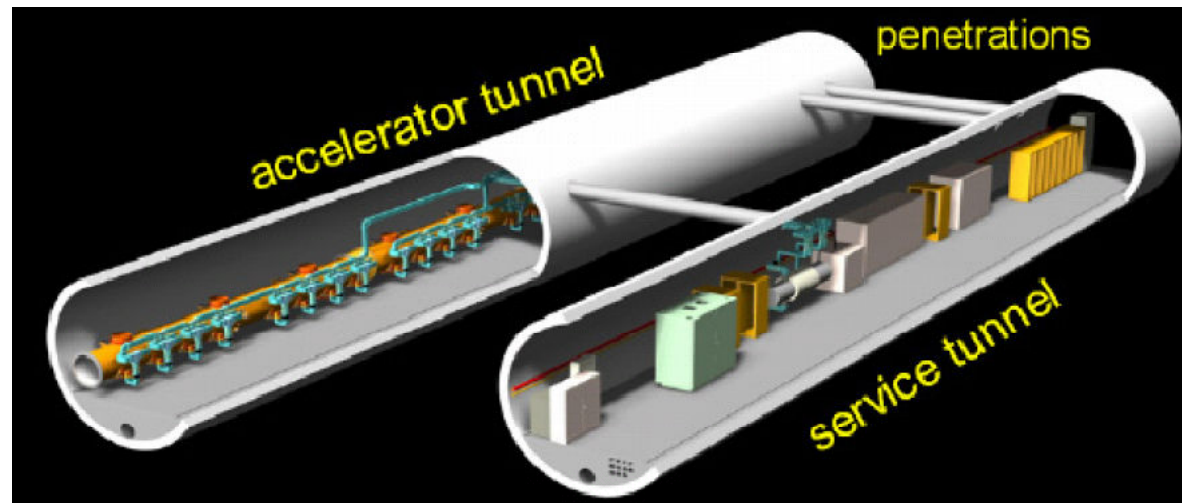


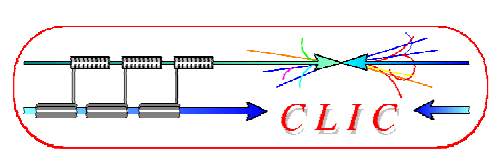

# ILC Super-conducting technology



The core technology for the ILC is 1.3GHz superconducting RF cavity intensely developed in the TESLA collaboration, and recommended for the ILC by the ITRP on 2004 August.


The cavities are installed in a long cryostat **cooled at 2K**, and operated at **gradient 31.5MV/m**.

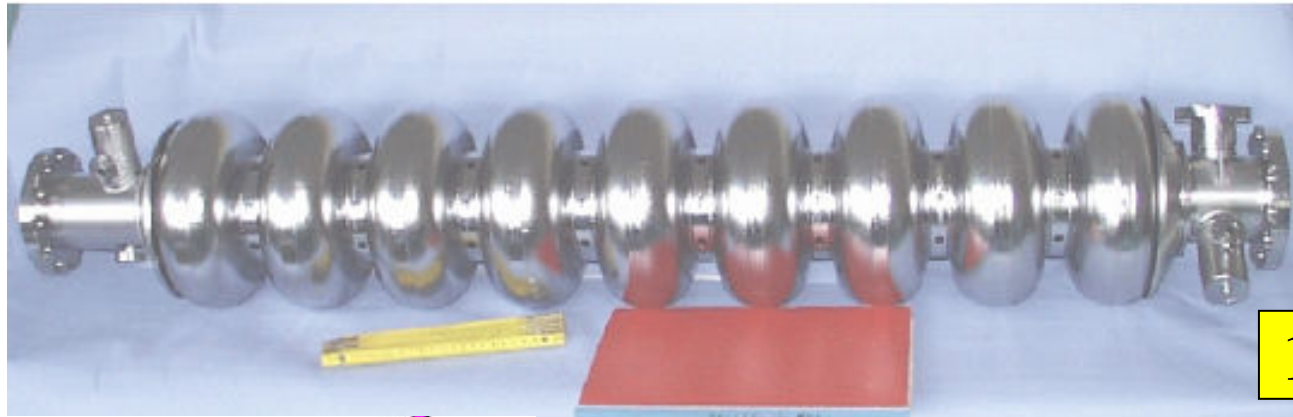

**14560 cavities**

**1680 modules**

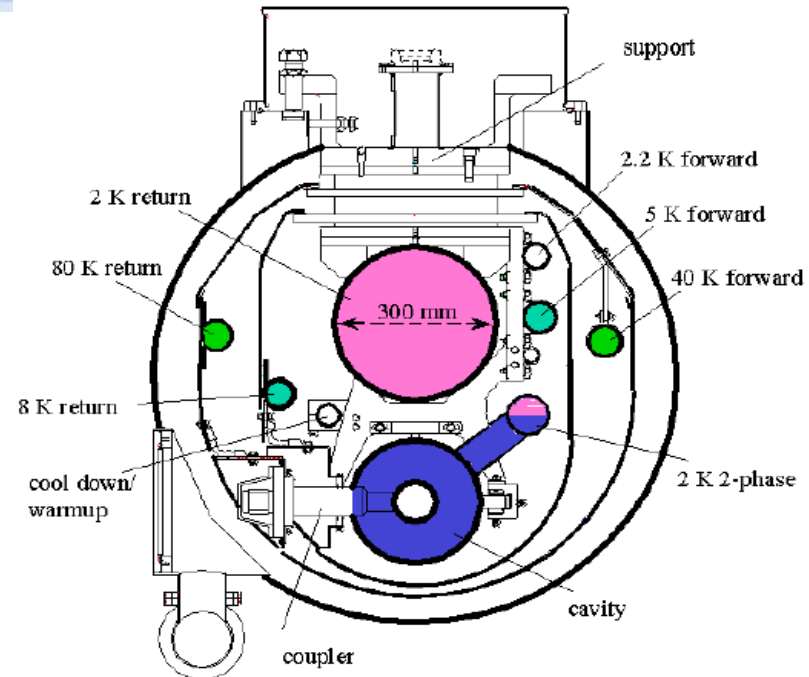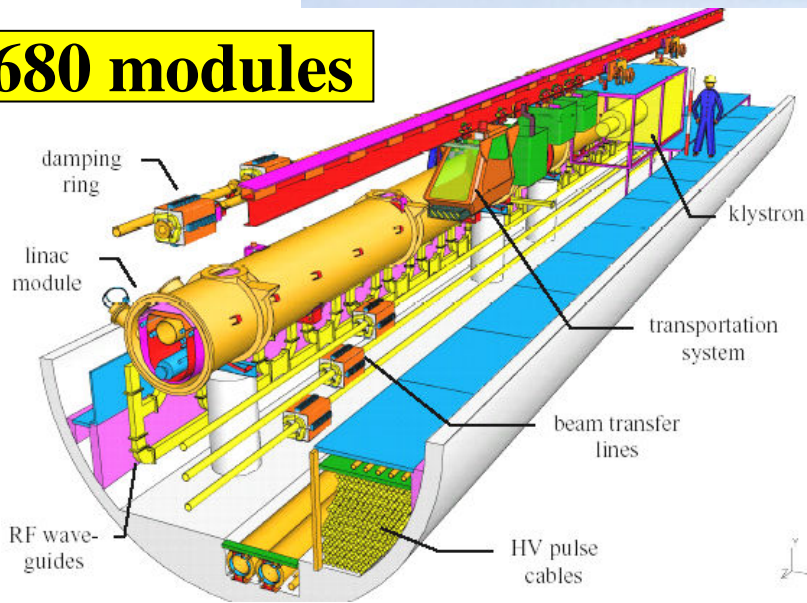

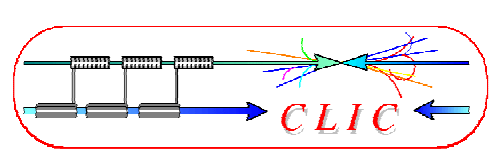


# ILC Main Linac RF Unit




560 RF units each one composed of:


- 1 Bouncer type modulator
- 1 Multibeam klystron (10 MW, 1.6 ms)
- 3 Cryostats (9+8+9 = 26 cavities)
- 1 Quadrupole at the center

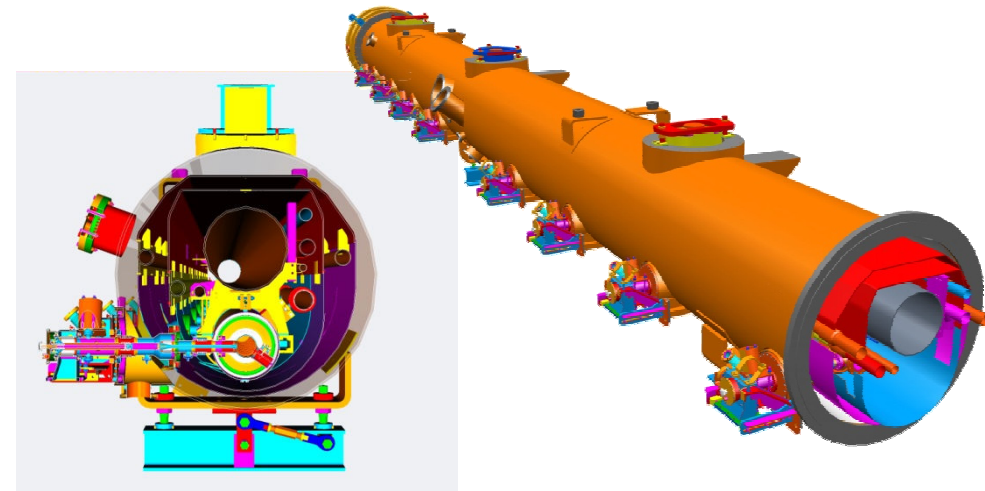

Total of 1680 cryomodules and **14 560 SC RF cavities**

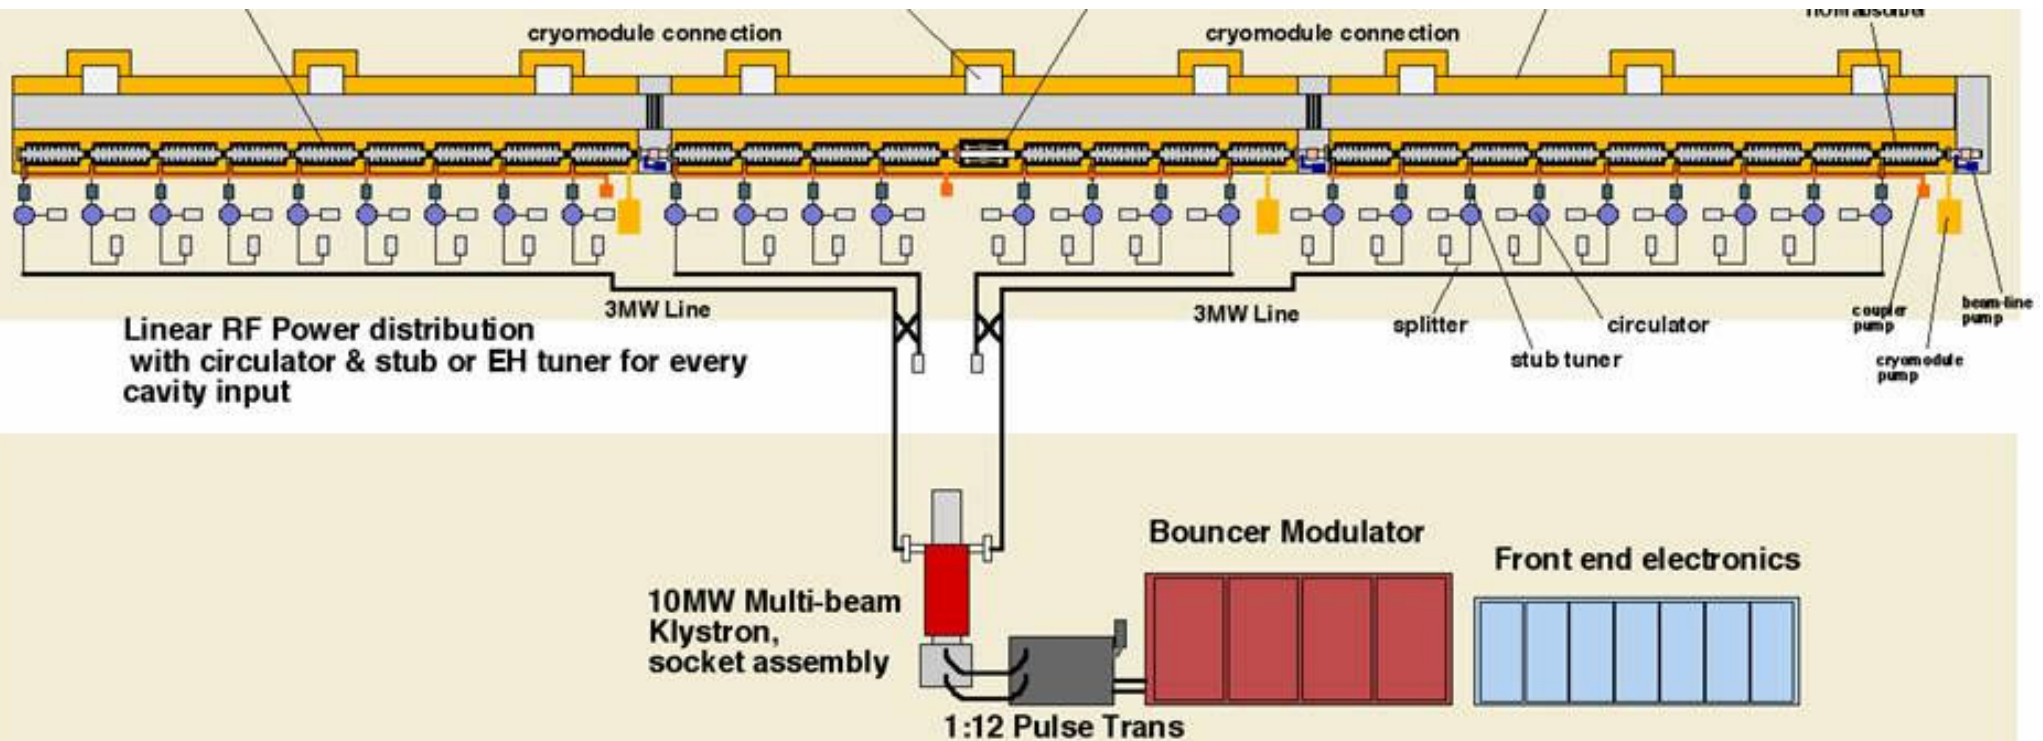





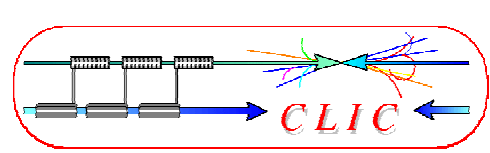

# SC Technology




- In the past, SC gradient typically 5 MV/m and expensive cryogenic equipment
- TESLA development: new material specs, new cleaning and fabrication techniques, new processing techniques
- Significant cost reduction
- **Gradient substantially increased**
- Electropolishing technique has reached ~35 MV/m in 9-cell cavities
- Still requires essential work
- 31.5 MV/m ILC baseline

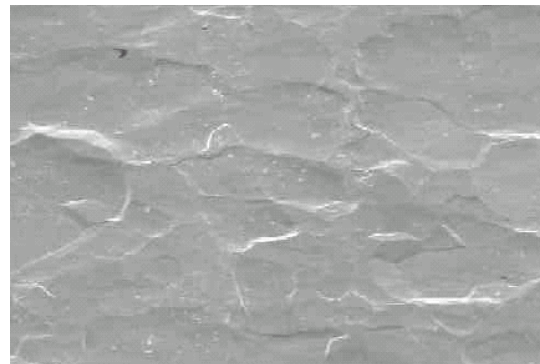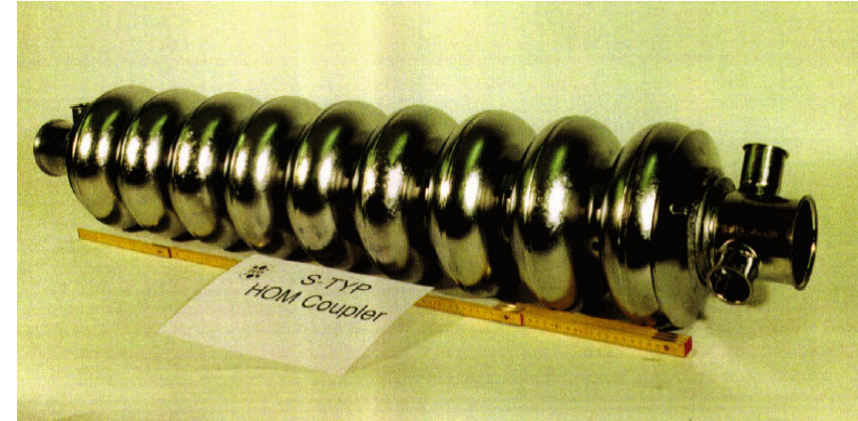

Chemical polish





Electropolishing

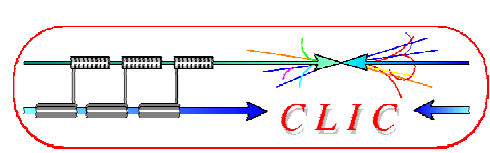


# Achieved accelerating gradients

- Recent progress by R&D programme to systematically understand and set procedures for the production process
- goal to reach a 50% yield at 35 MV/m by the end of 2010
- already approaching that goal
- 90% yield foreseen later

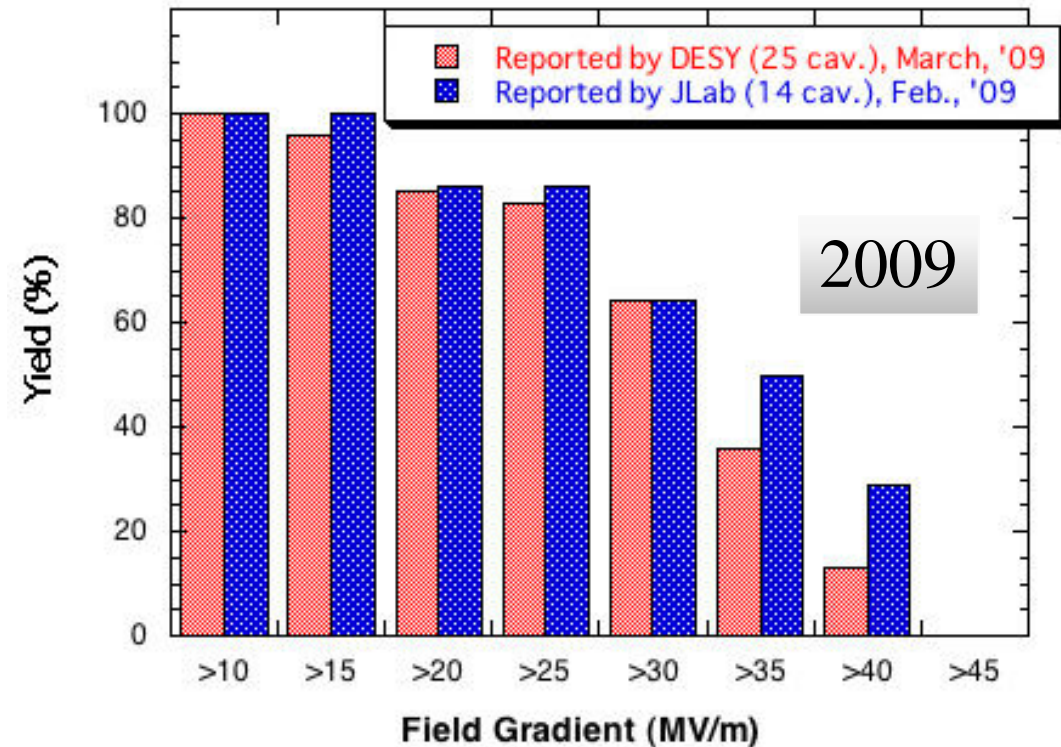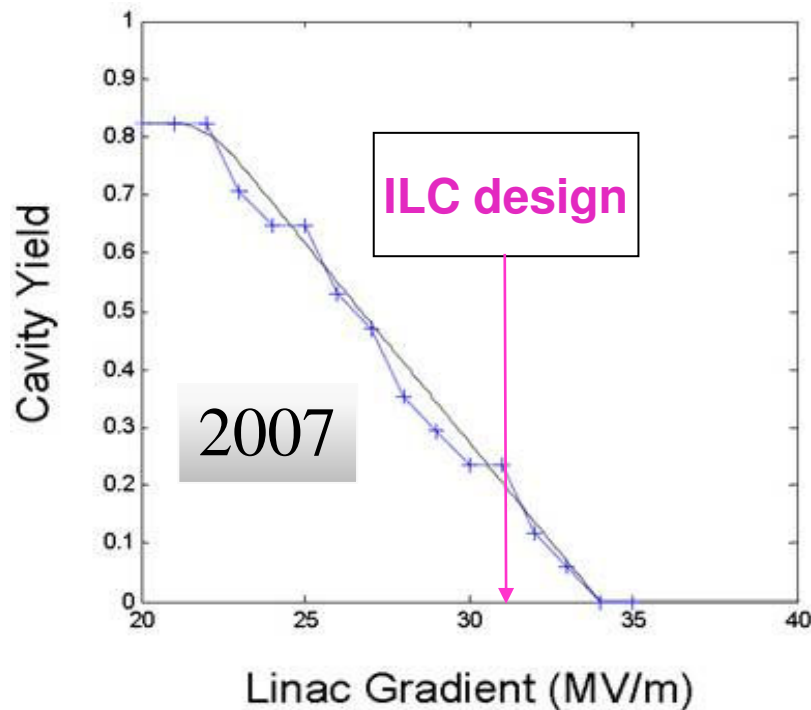



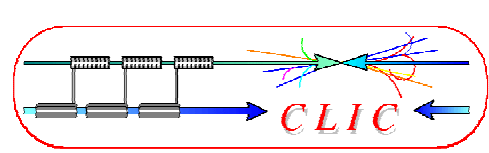


# R&D of SCRF cavities




Derived From TESLA Collaboration

TESLA Nine-Cells: (Proof-of-Principle)  
Best tests of 9 best Cavities (Vertical Test Results)

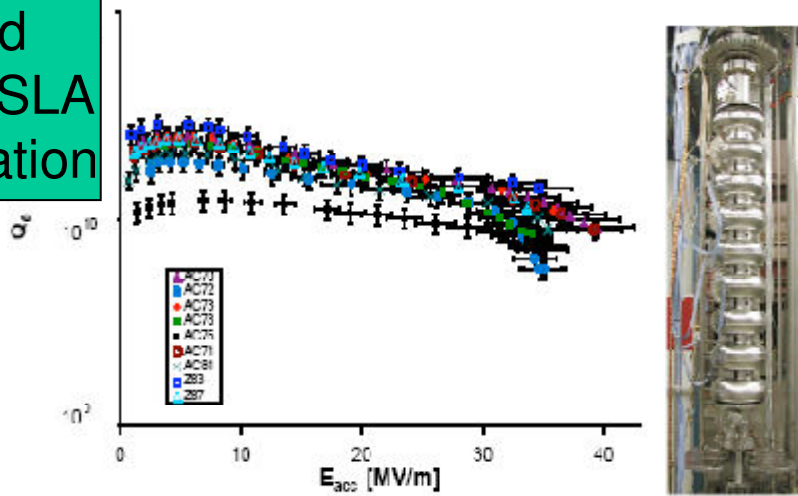


(A) CBP+CP+Anneal+EP(80μm) +HPR+Baking(120C\*48hrs) K. Saito et al.

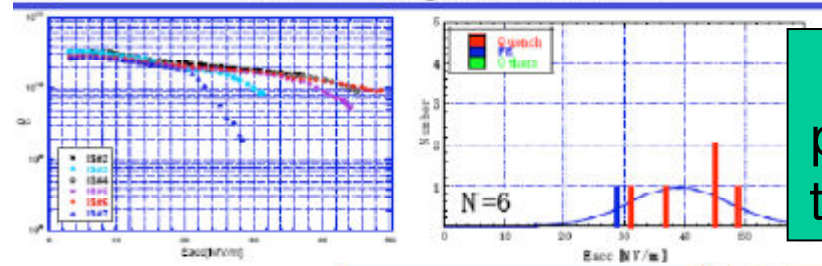


New preparation techniques

(D) EP(20μm) EP(3μm, fresh, closed) +HPR+Baking (120C\*48hrs) K. Saito et al.

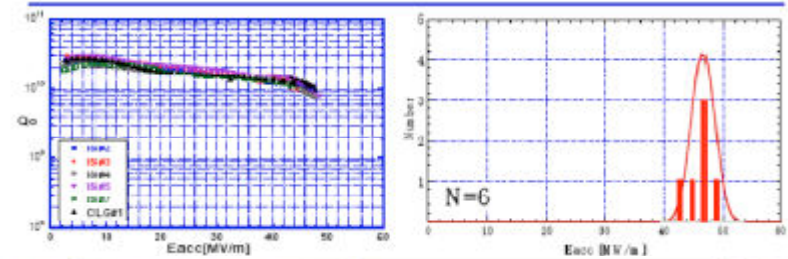


60mm-Aperture Re-Entrant Cavity, 58 MV/m!  
KEK/Cornell Collaboration

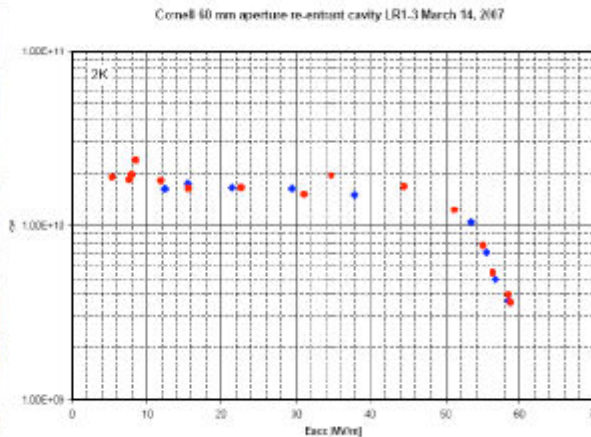

New cavity shapes




DESY single crystal cavity 1AC8 build from Heraeus disc by rolling at RWTH, deep drawing and EB welding at ACCEL

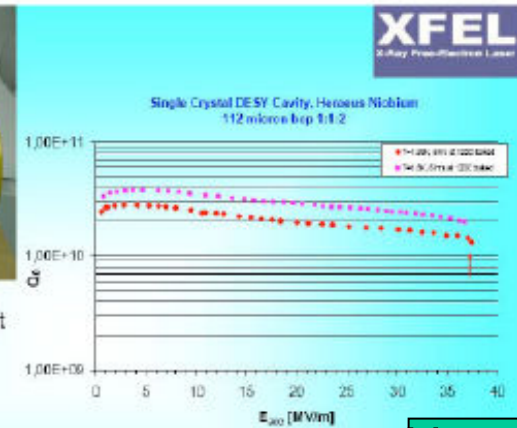

Q(E\_acc) curve after only 112 μ and in situ baking 120°C for Preparation and RF tests P.Kneisel, JLab

New materials  
Large grains  
Higher perf  
Lower cost

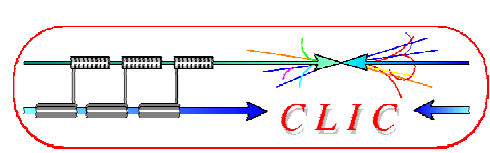


# Accelerating gradient




- Superconducting cavities **fundamentally limited in gradient** by critical magnetic field => become normal conducting above
- Normal conducting cavities are limited in pulse length by **“Pulsed surface heating”** => can lead to fatigue

- Normal conducting cavities:  
**higher gradient** with shorter RF pulse length
- Superconducting cavities:  
**lower gradient** with long RF pulse

Accelerating fields in Linear Colliders

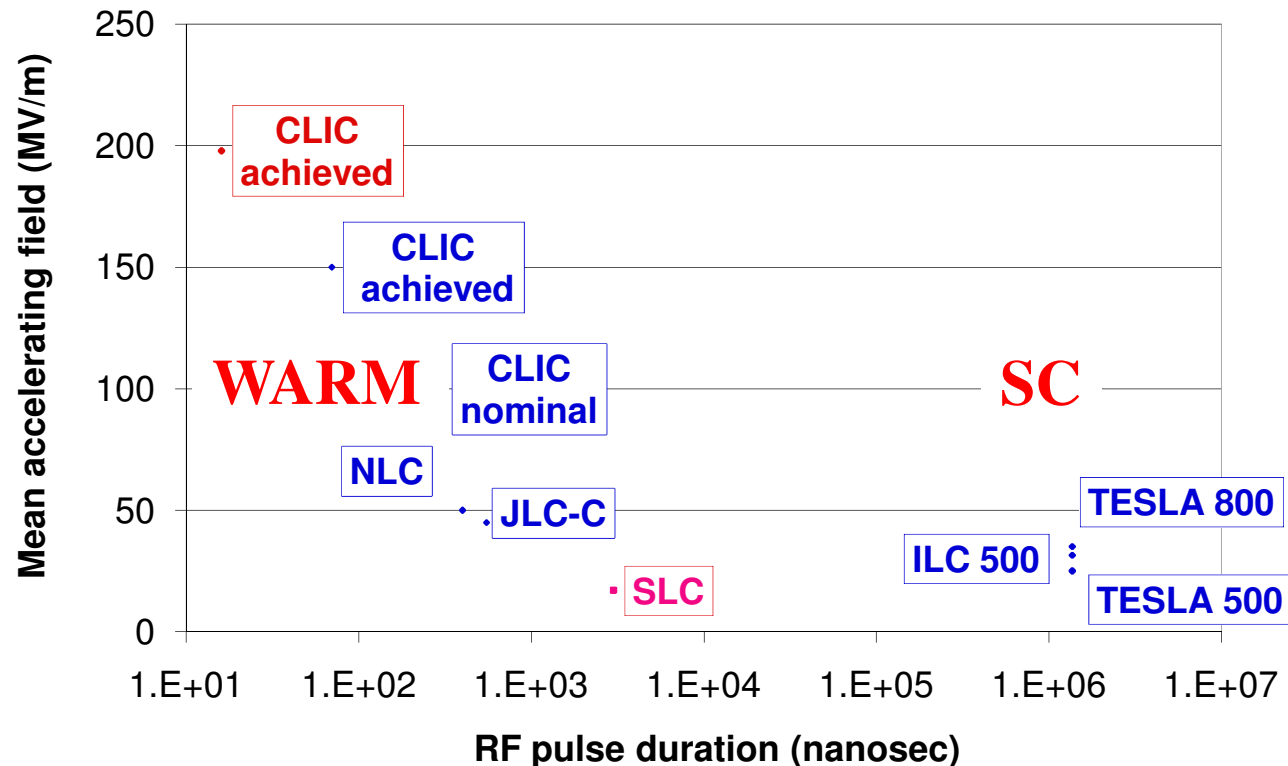




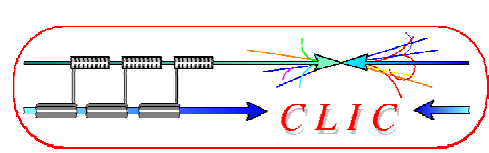


# Multi-TeV: the CLIC Study




- Develop **technology for linear e+/e- collider** with the requirements:
  - $E_{cm}$  should cover range from ILC to LHC maximum reach and beyond  $\Rightarrow E_{cm} = 0.5 - 3 \text{ TeV}$
  - **Luminosity**  $>$  few  $10^{34} \text{ cm}^{-2}$  with acceptable background and energy spread
    - $E_{cm}$  and  $L$  to be reviewed once LHC results are available
  - Design compatible with maximum **length**  $\sim 50 \text{ km}$
  - Affordable
  - Total **power** consumption  $< 500 \text{ MW}$
- **Present goal:** **Demonstrate** all **key feasibility issues** and document in a CDR **by 2010** (possibly TDR by 2016)

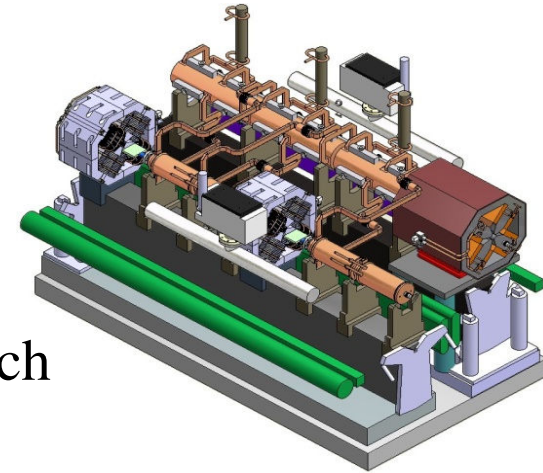

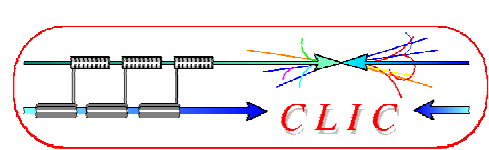

# World-wide CLIC&CTF3 Collaboration



**33 Institutes involving 21 funding agencies and 18 countries**




Aarhus University (Denmark)  
 Ankara University (Turkey)  
 Argonne National Laboratory (USA)  
 Athens University (Greece)  
 BINP (Russia)  
 CERN  
 CIEMAT (Spain)  
 Cockcroft Institute (UK)  
 Gazi Universities (Turkey)

Helsinki Institute of Physics (Finland)  
 IAP (Russia)  
 IAP NASU (Ukraine)  
 INFN / LNF (Italy)  
 Instituto de Fisica Corpuscular (Spain)  
 IRFU / Saclay (France)  
 Jefferson Lab (USA)  
 John Adams Institute (UK)



JINR (Russia)  
 Karlsruhe University (Germany)  
 KEK (Japan)  
 LAL / Orsay (France)  
 LAPP / ESIA (France)  
 NCP (Pakistan)  
 North-West. Univ. Illinois (USA)  
 Oslo University (Norway)

Patras University (Greece)  
 Polytech. University of Catalonia (Spain)  
 PSI (Switzerland)  
 RAL (UK)  
 RRCAT / Indore (India)  
 SLAC (USA)  
 Thrace University (Greece)  
 Uppsala University (Sweden)

# CLIC – basic features




- **High acceleration gradient**
  - “Compact” collider – total length < 50 km
  - Normal conducting acceleration structures
  - High acceleration frequency (12 GHz)
- **Two-Beam Acceleration Scheme**
  - High charge **Drive Beam** (low energy)
  - Low charge **Main Beam** (high collision energy)
  - ⇒ Simple tunnel, no active elements
  - ⇒ Modular, easy energy upgrade in stages

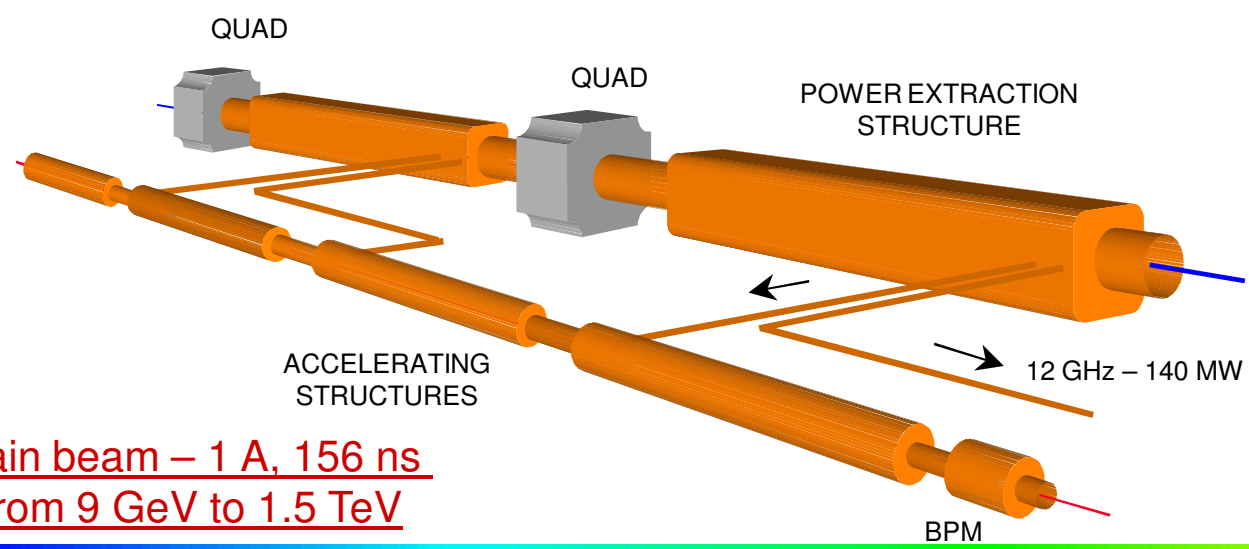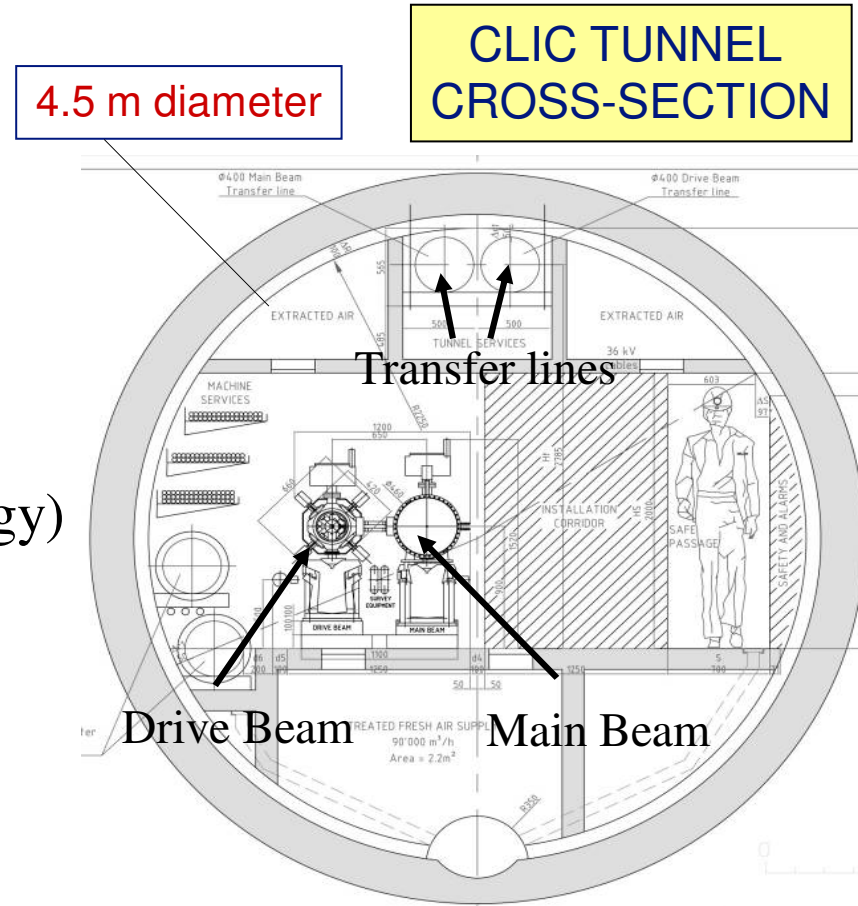

Drive beam - 101 A, 240 ns  
from 2.4 GeV to 240 MeV


Main beam – 1 A, 156 ns  
from 9 GeV to 1.5 TeV

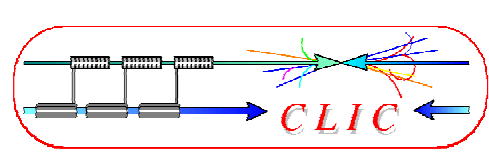


# CLIC Layout at various energies




## 0.5 TeV Stage

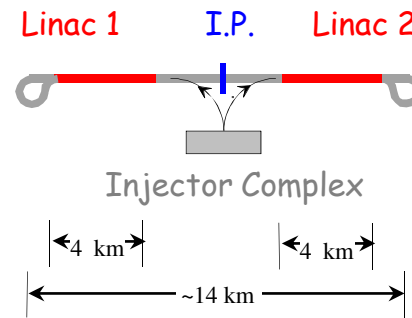


## 1 TeV Stage

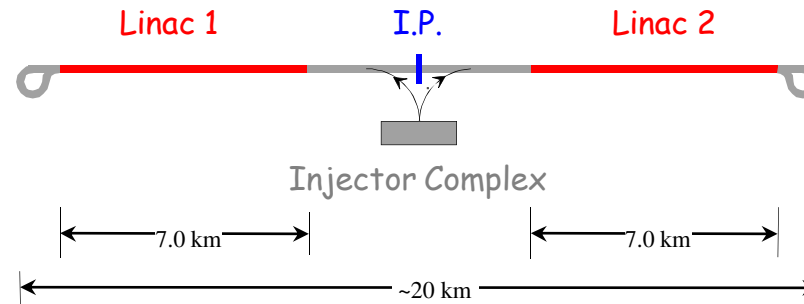


## 3 TeV Stage

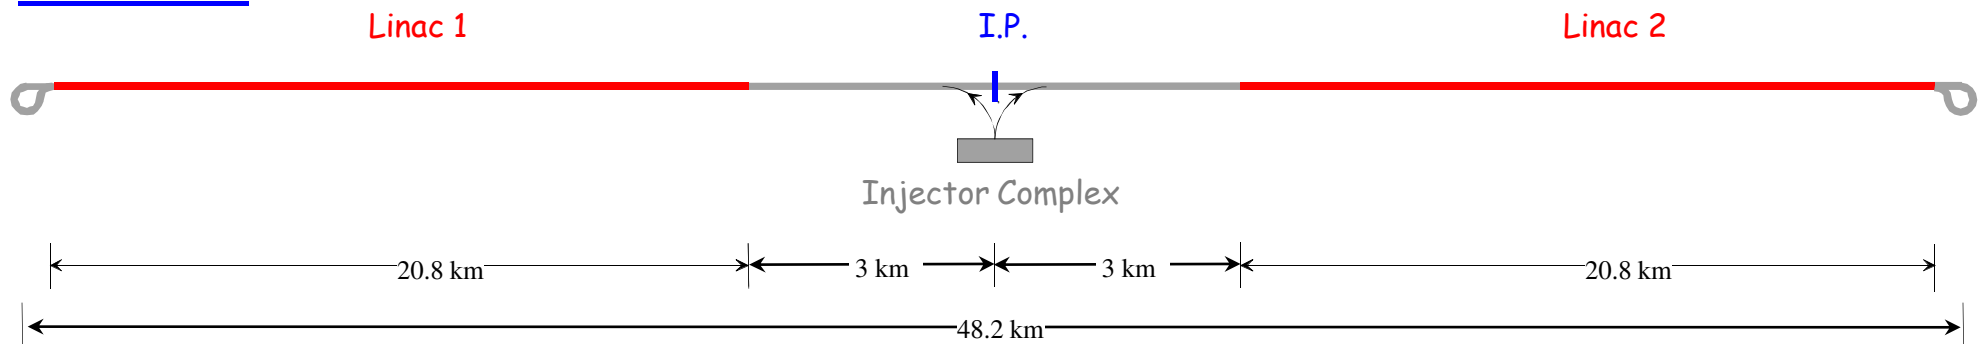




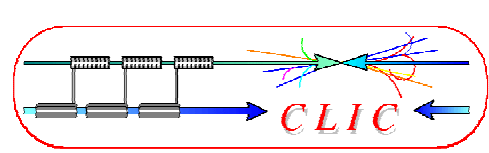

# CLIC – overall layout

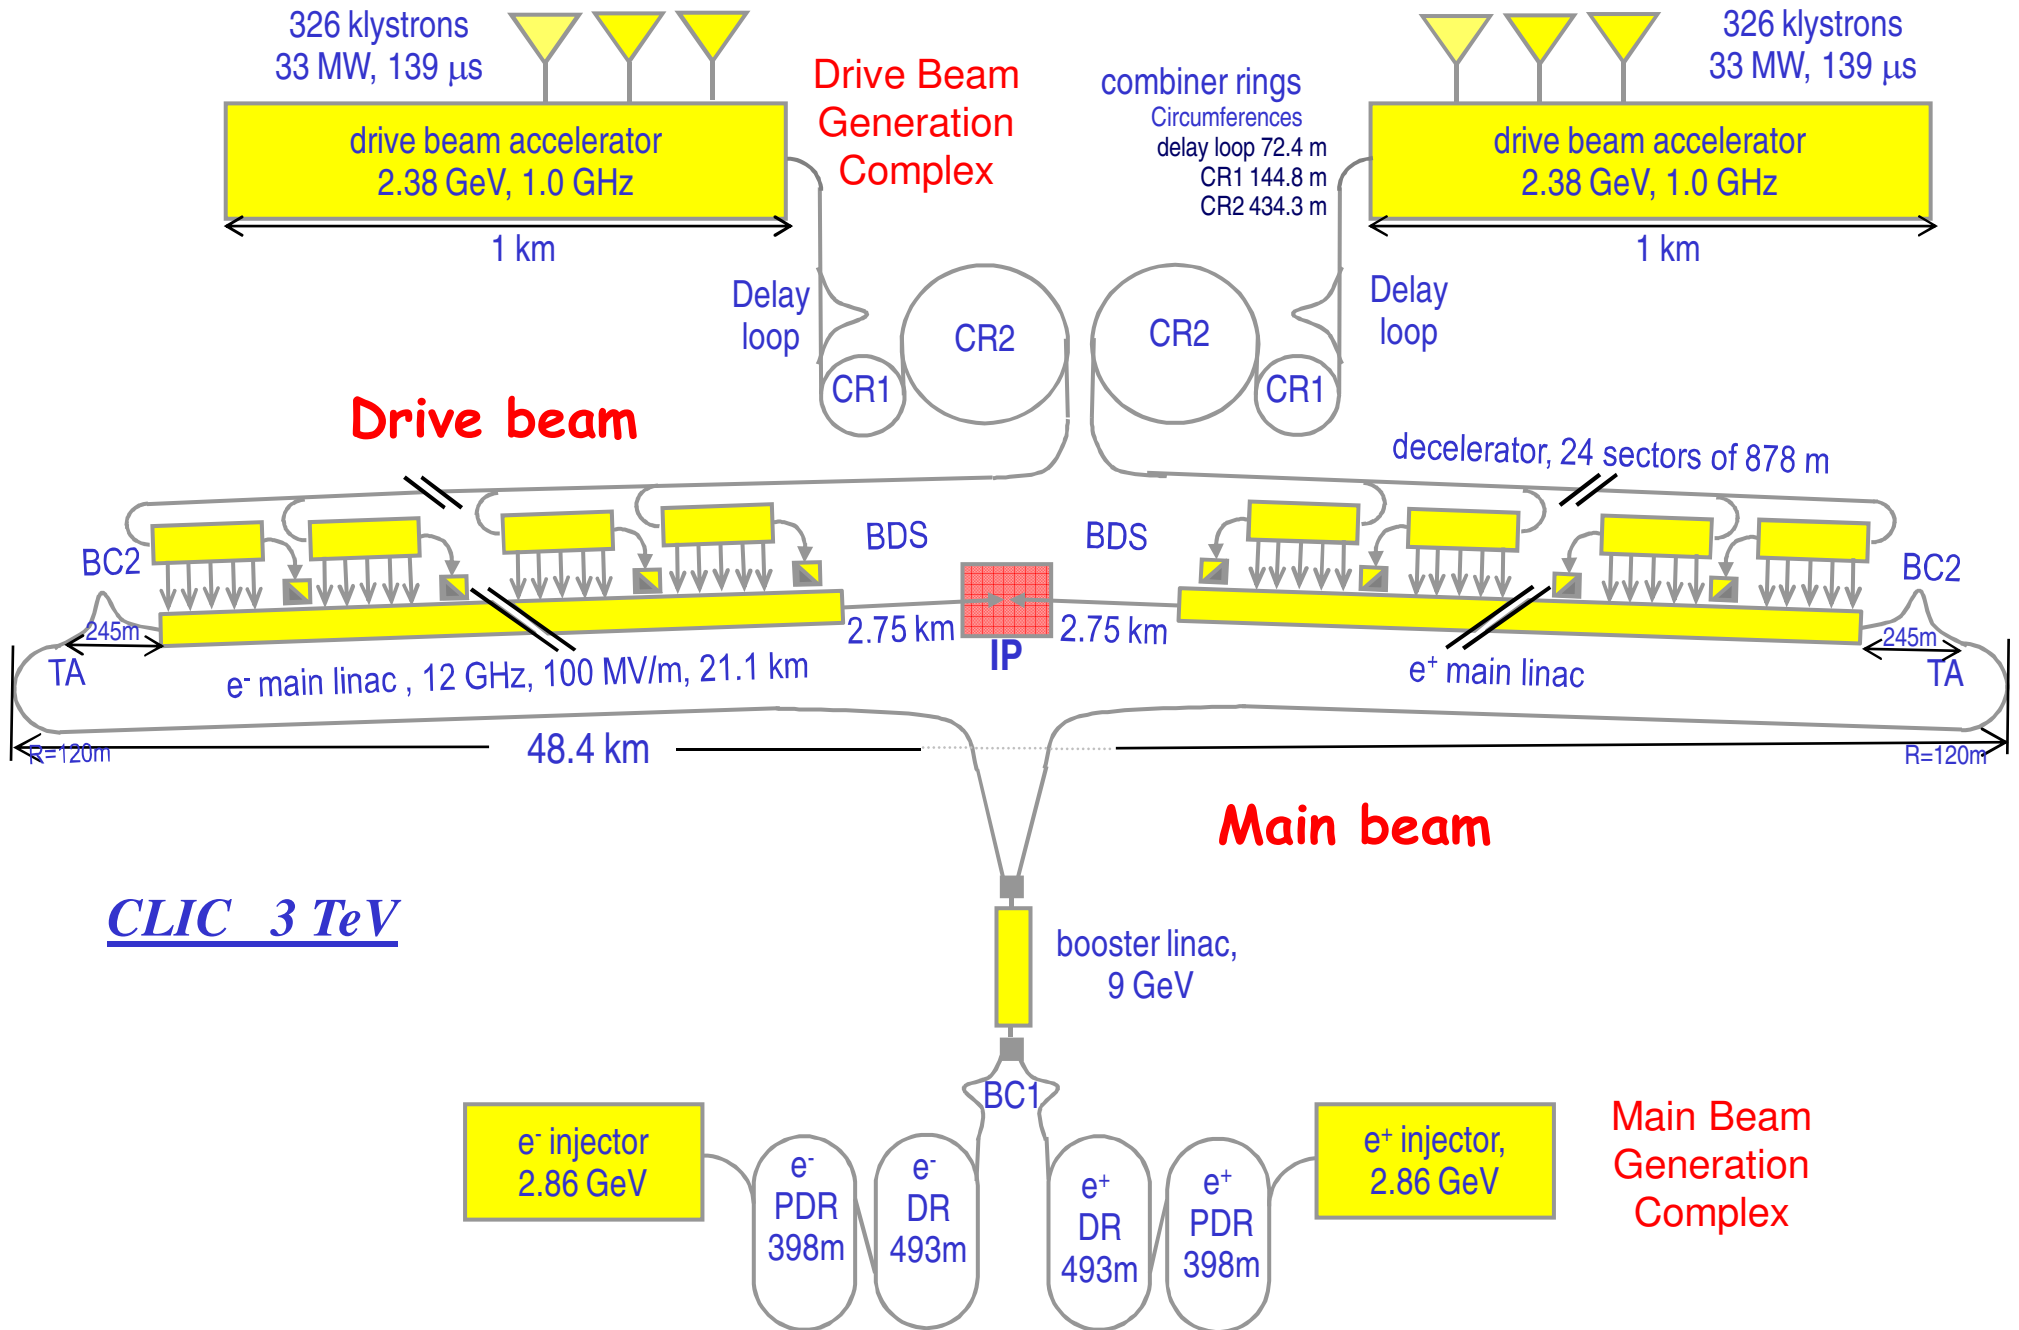

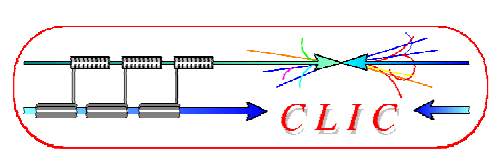


# CLIC main parameters



Center-of-mass energy	3 TeV
Peak Luminosity	$6 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$
Peak luminosity (in 1% of energy)	$2 \cdot 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$
Repetition rate	50 Hz
Loaded accelerating gradient	100 MV/m
Main linac RF frequency	12 GHz
Overall two-linac length	41.7 km
Bunch charge	$3.7 \cdot 10^9$
Beam pulse length	156 ns
Average current in pulse	1 A
Hor./vert. normalized emittance	660 / 20 nm rad
Hor./vert. IP beam size before pinch	45 / $\sim 1$ nm
Total site length	48.4 km
Total power consumption	390 MW


Provisional values




# CLIC scheme



- **Very high gradients** possible with NC accelerating structures at high RF frequencies (**30 GHz → 12 GHz**) and short RF pulses (~100 ns)
- Extract required high RF power from an **intense e- “drive beam”**
- Generate **efficiently** long beam pulse and compress it (in power + frequency)

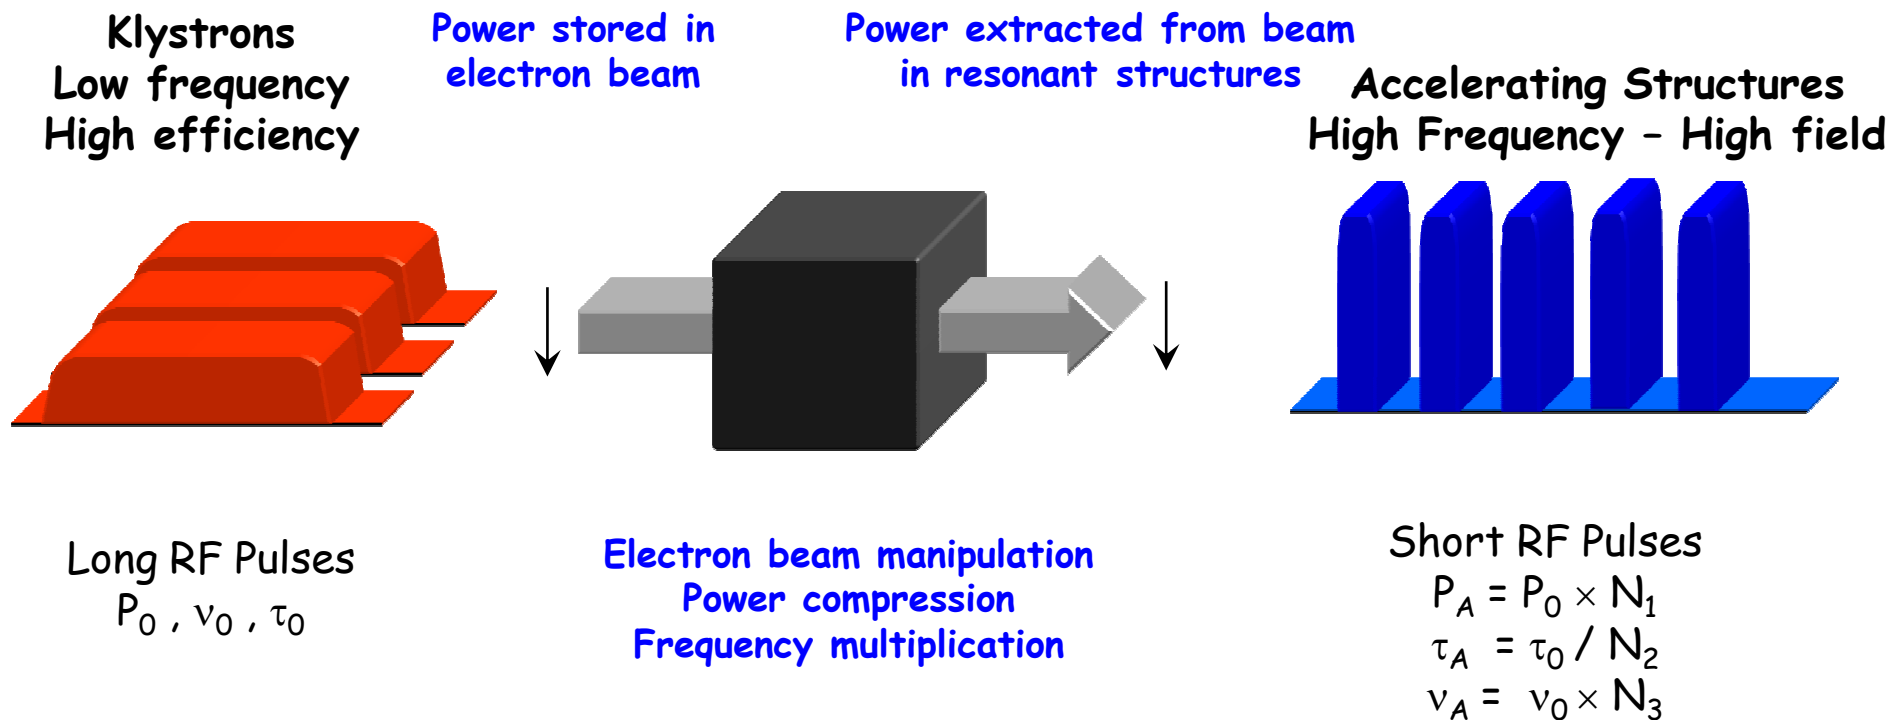

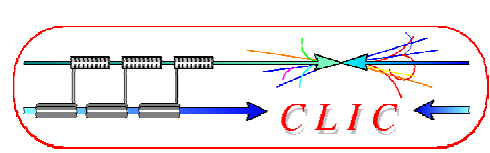


# Drive beam generation basics




## Efficient acceleration

Full beam-loading acceleration in traveling wave sections

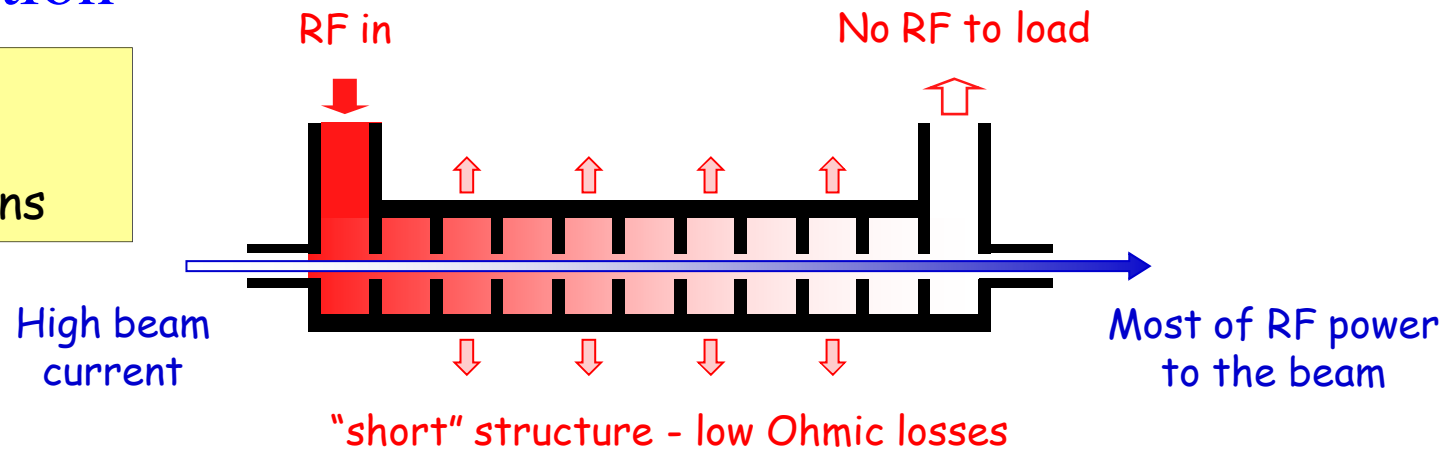


## Frequency multiplication


Beam combination/separation by transverse RF deflectors

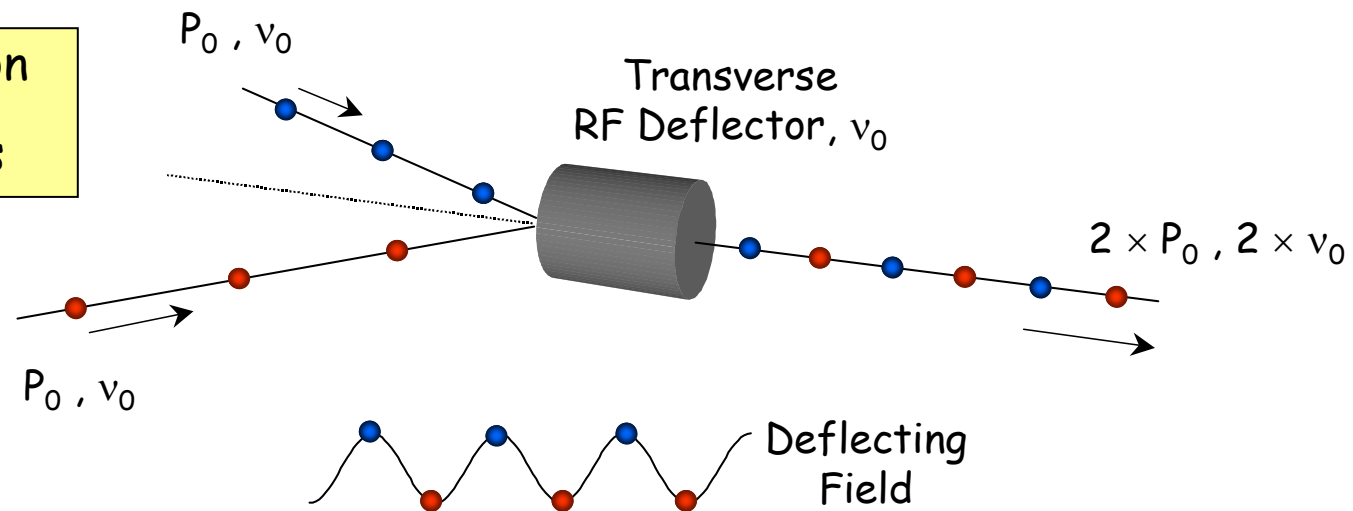




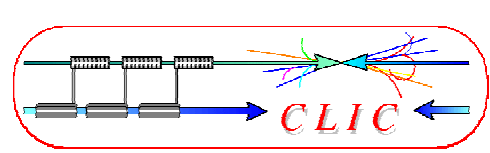



# Beam combination by RF deflectors

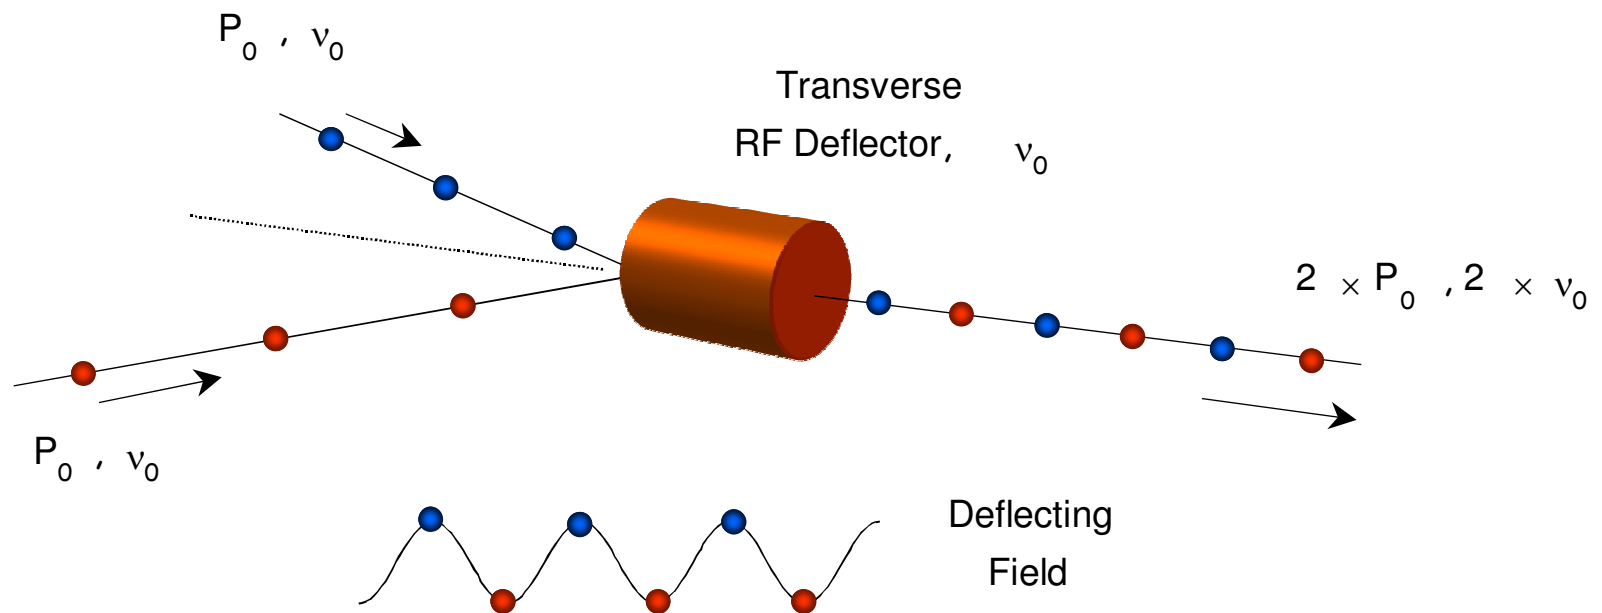

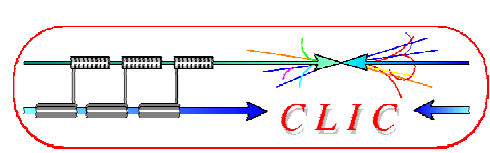

# Beam separation by RF deflectors

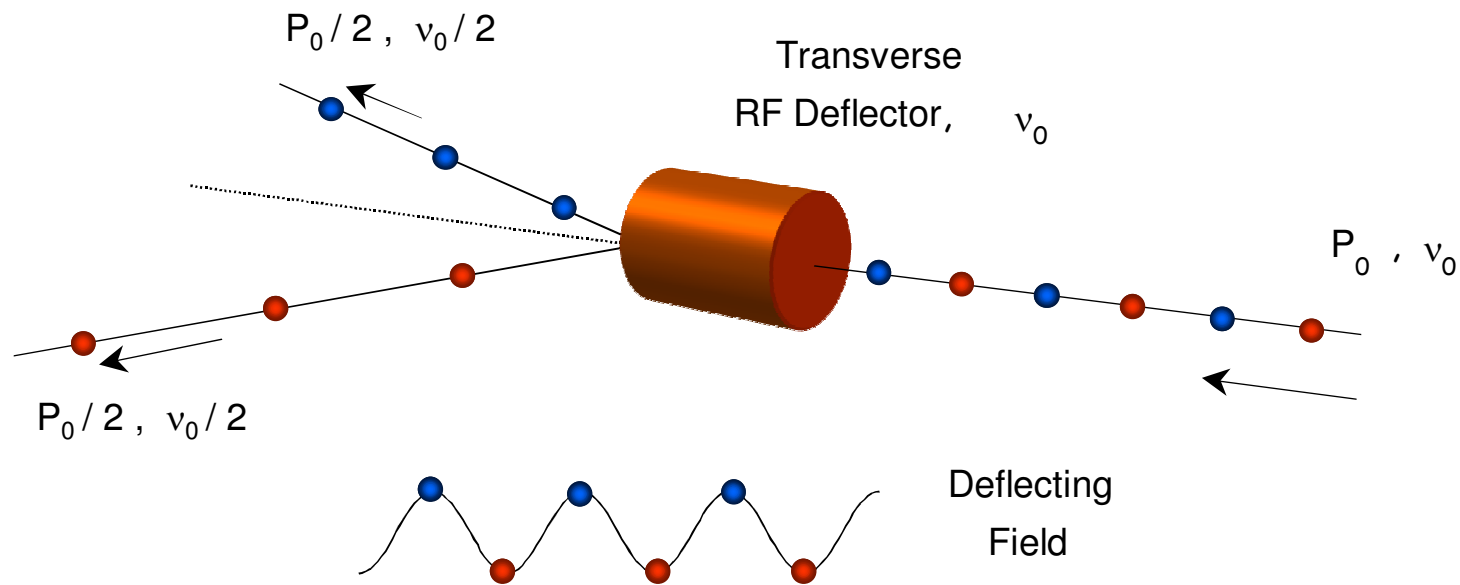


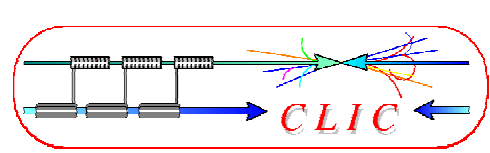


# Delay Loop Principle



- double repetition frequency and current
- parts of bunch train delayed in loop
- RF deflector combines the bunches

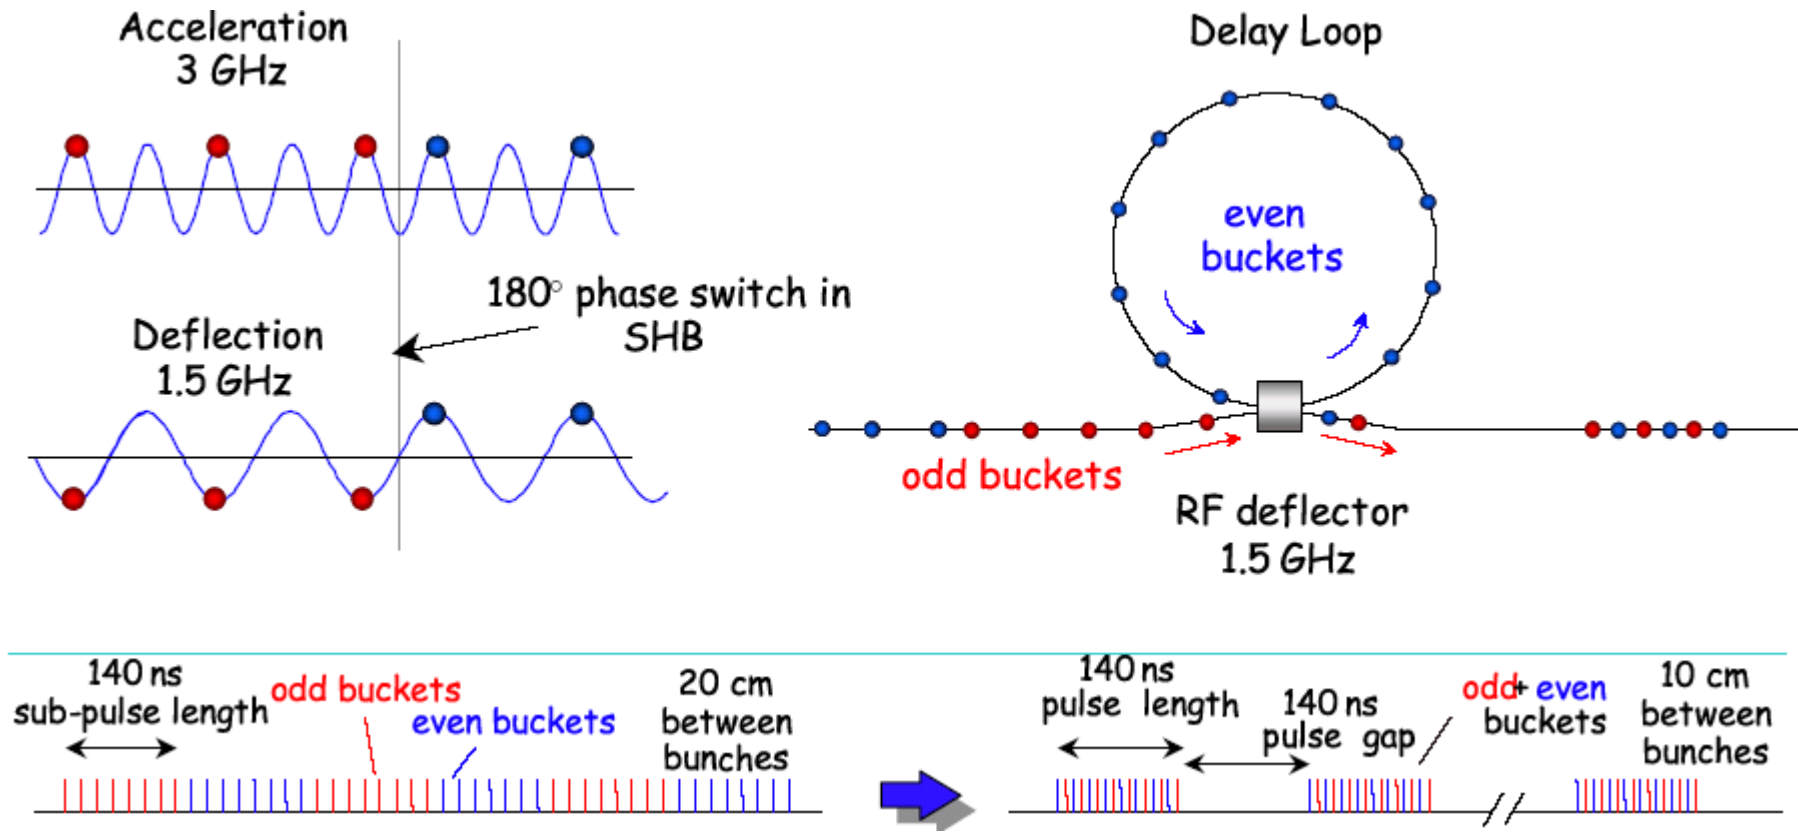




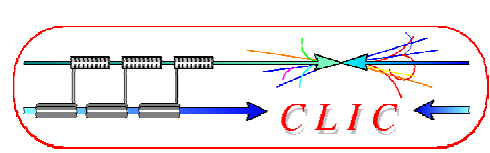


# RF injection in combiner ring




combination factors up to 5 reachable in a ring

$$C_{ring} = (n + 1/4) \lambda$$

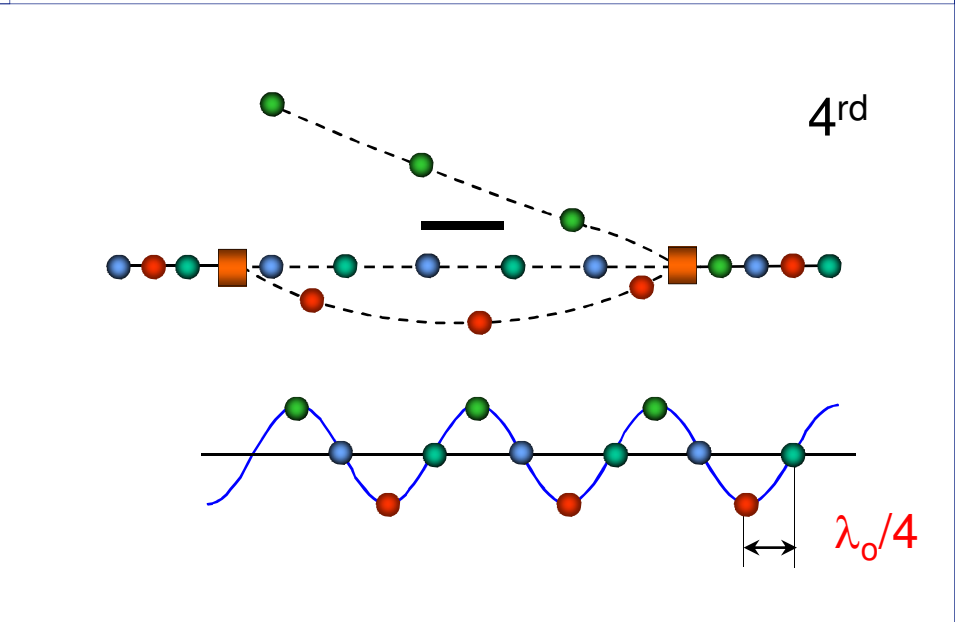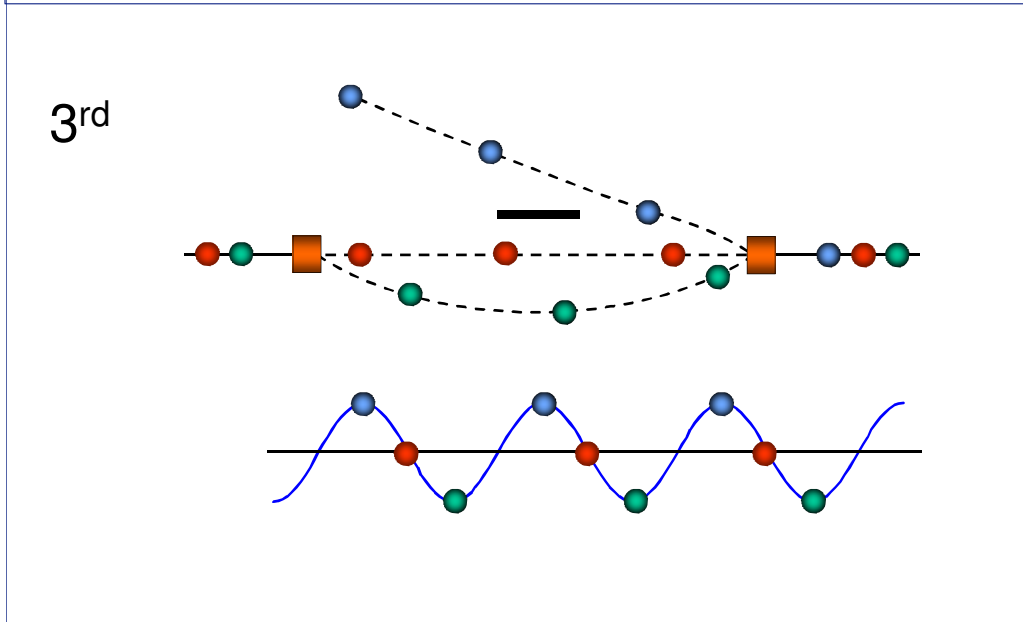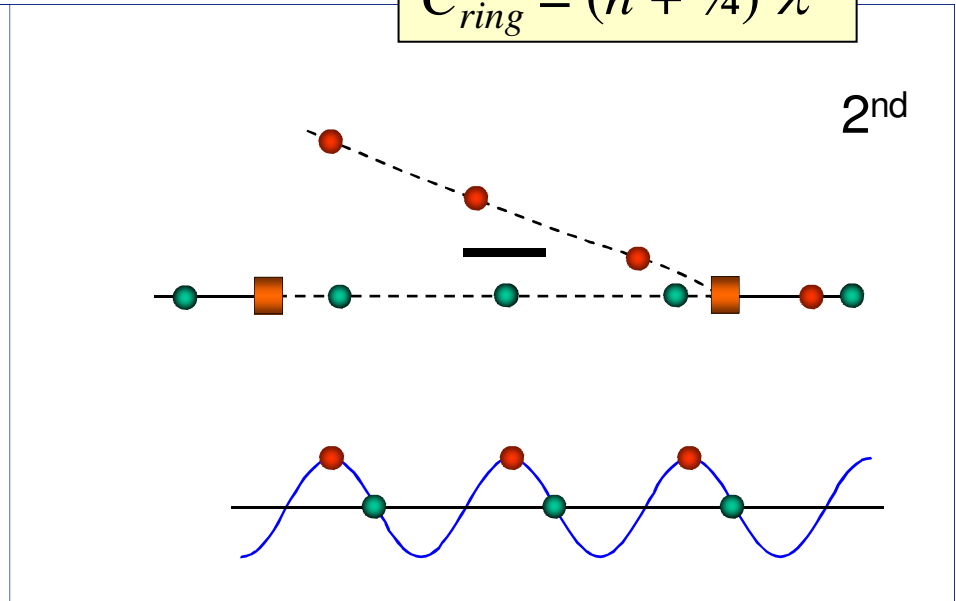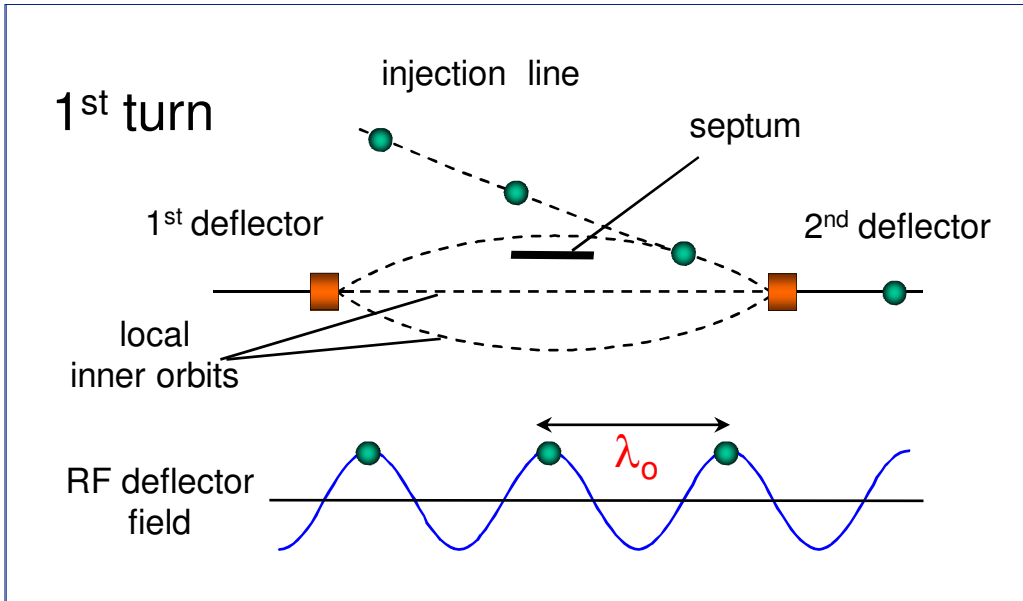






# Demonstration of frequency multiplication ...




## CTF3 - PRELIMINARY PHASE 2001/2002

Successful low-charge demonstration of electron pulse combination and bunch frequency multiplication by up to factor 5

Streak camera image of beam time structure evolution

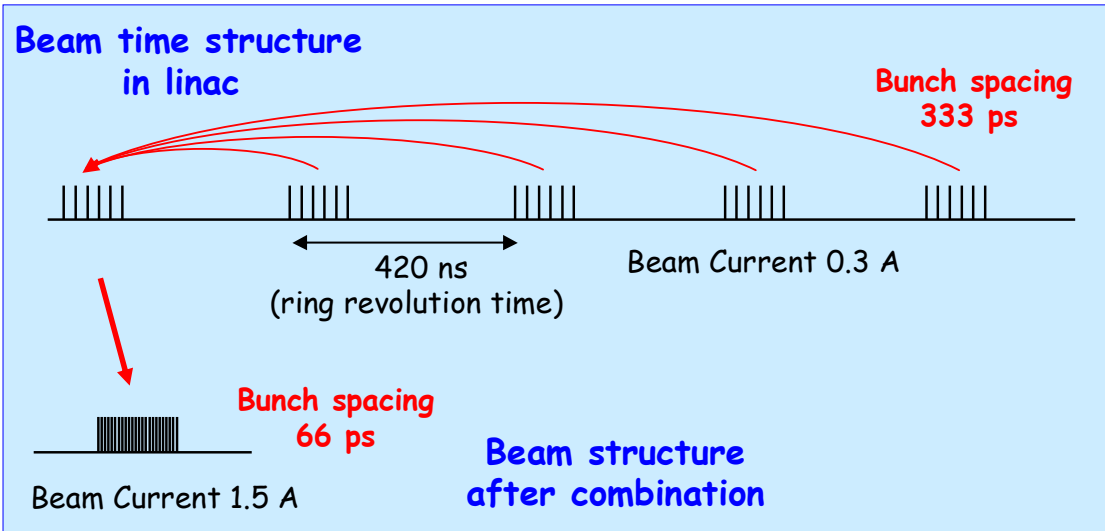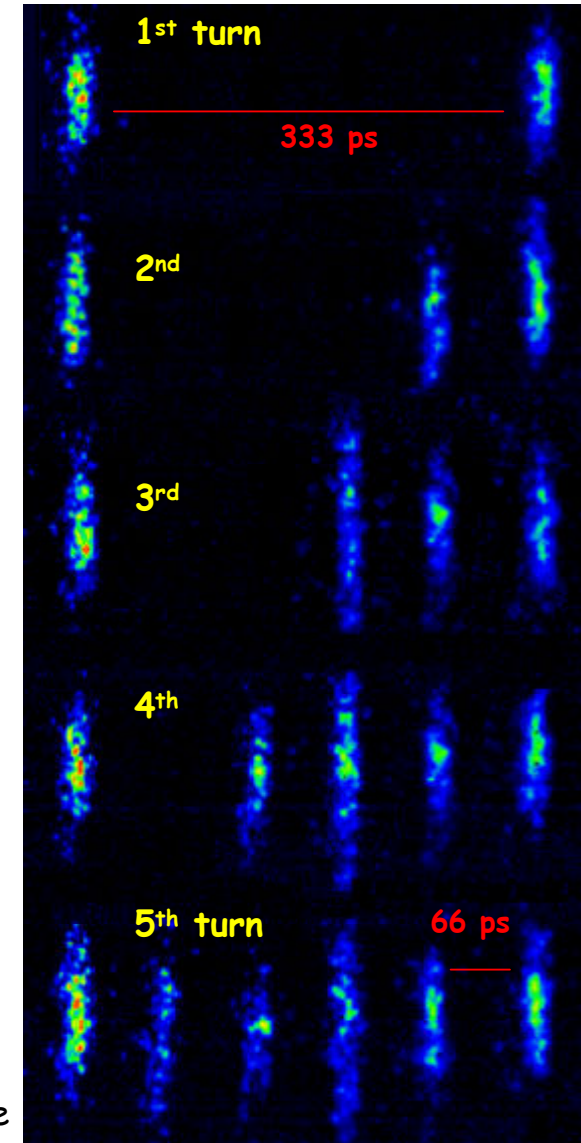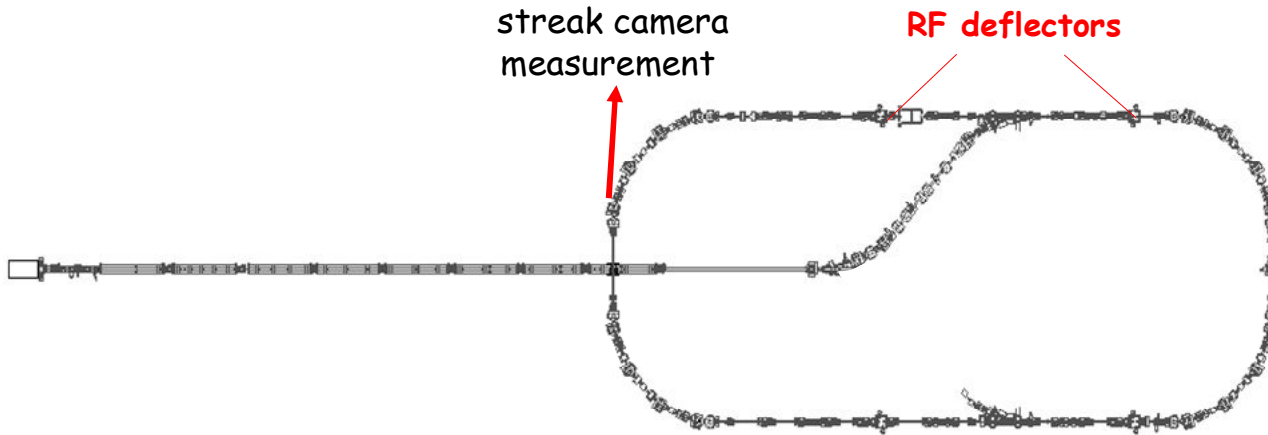


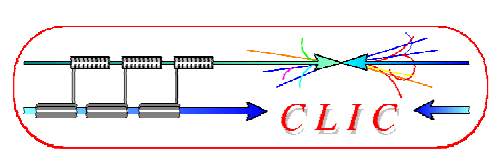

# CTF3 preliminary phase (2001-2002)




## RF injection in combiner ring

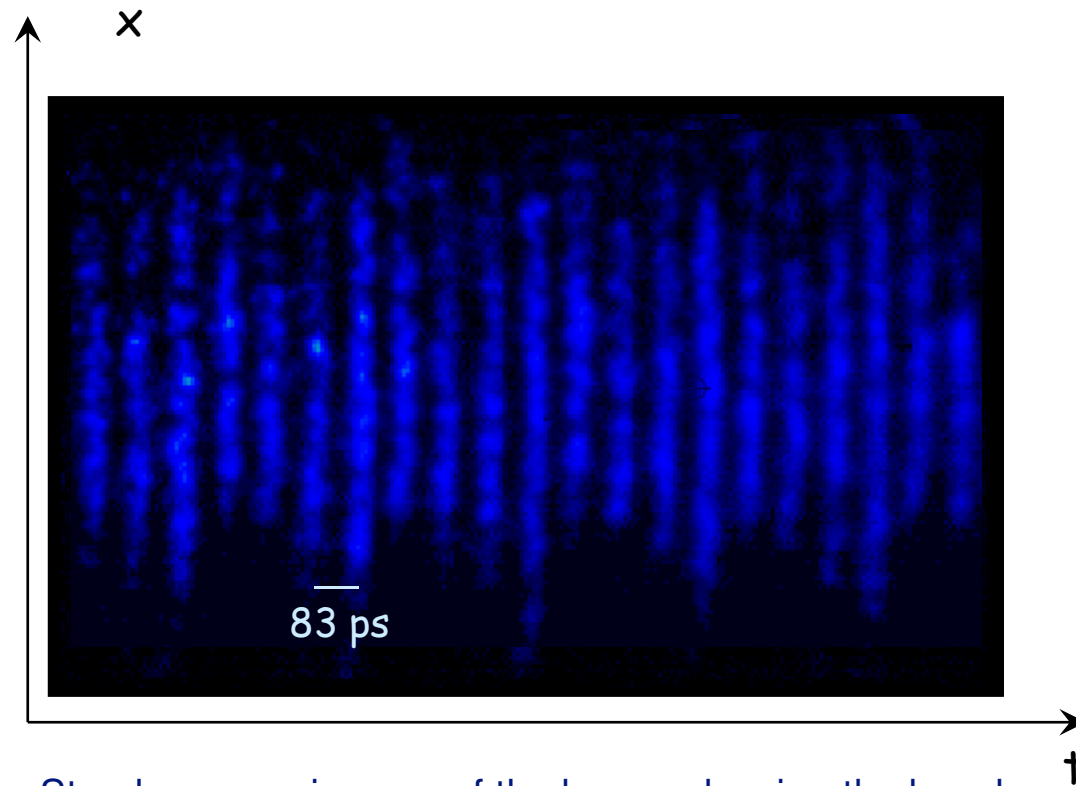


Streak camera images of the beam, showing the bunch combination process

A first ring combination test was performed in 2002, *at low current and short pulse*, in the CERN Electron-Positron Accumulator (EPA), properly modified


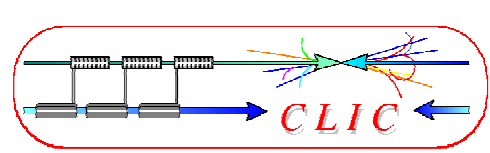


# Lemmings Drive Beam

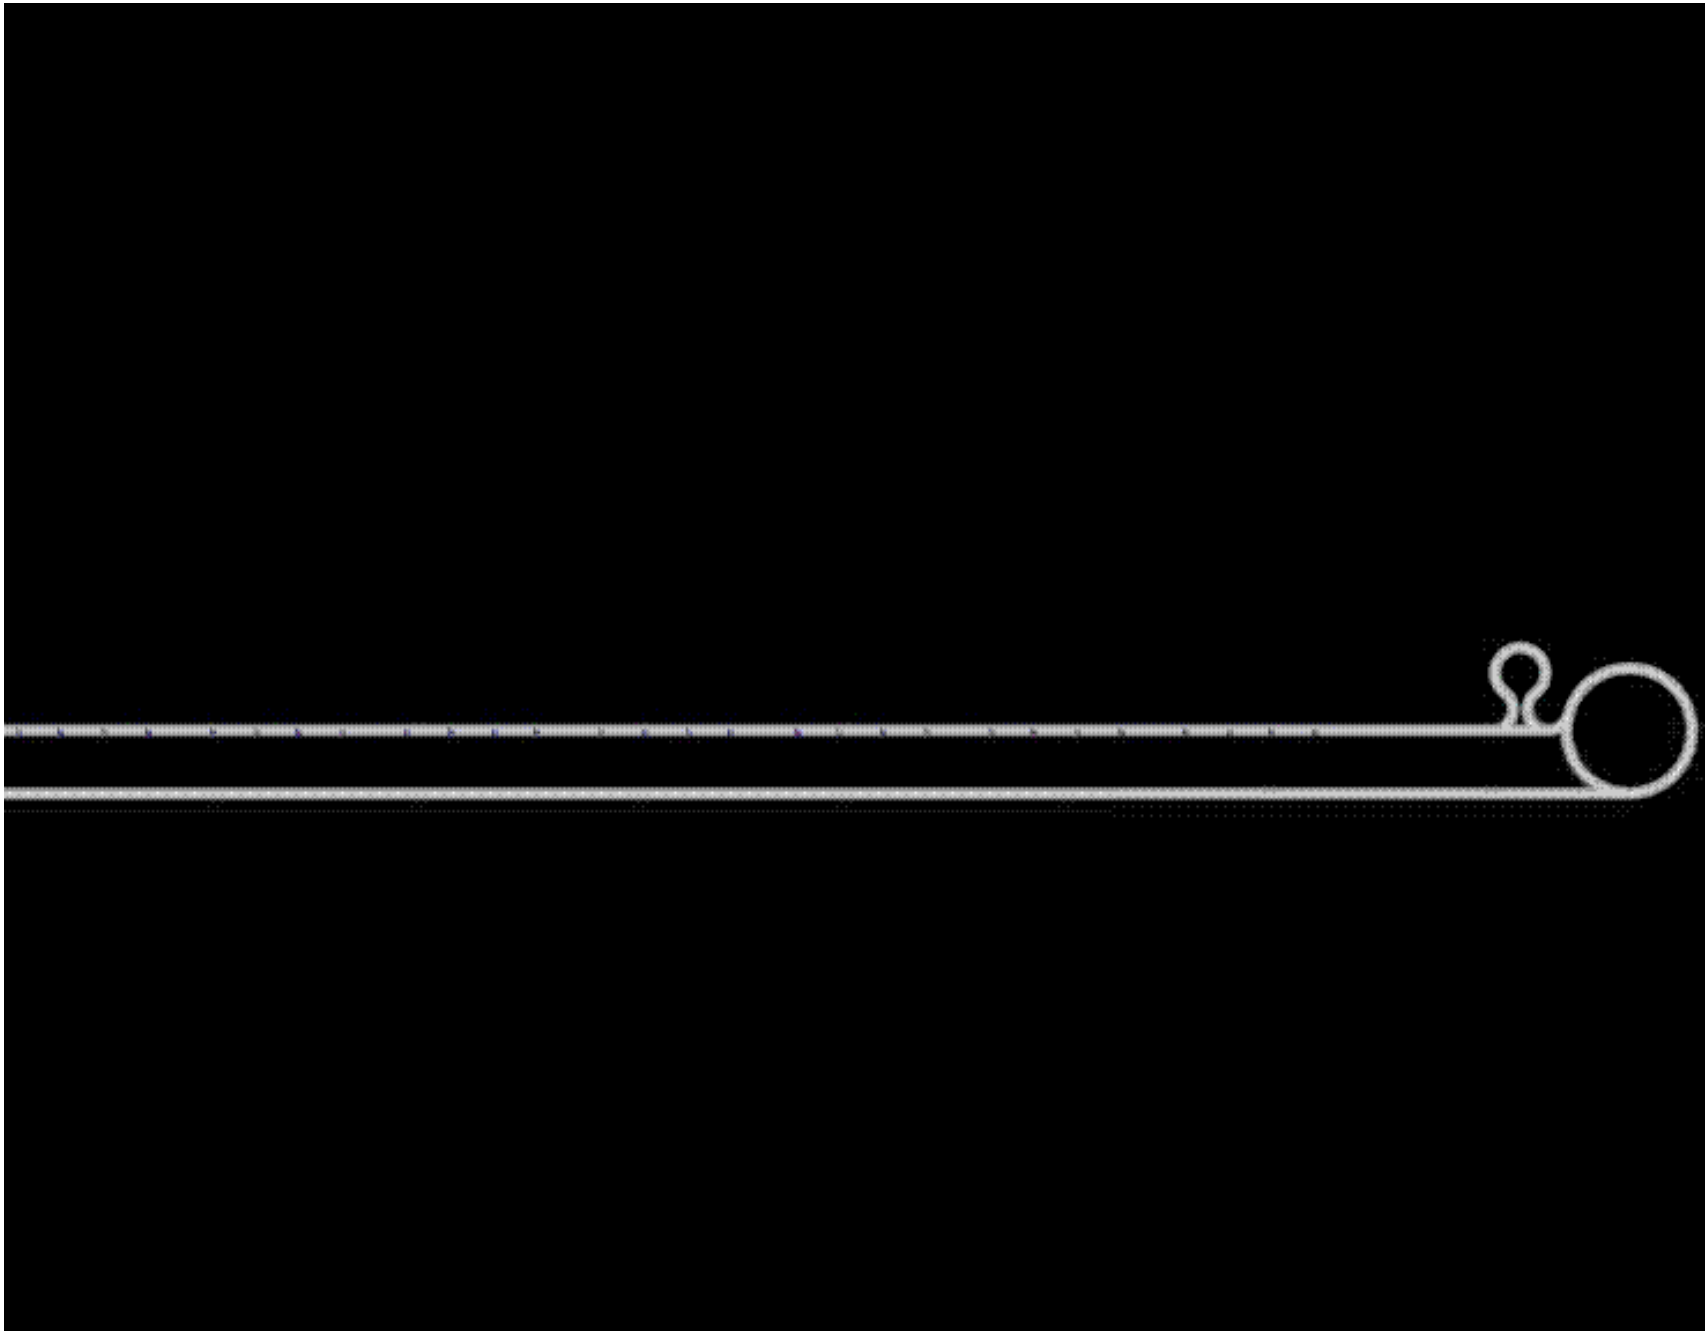

Alexandra  
Andersson


# CLIC Drive Beam generation

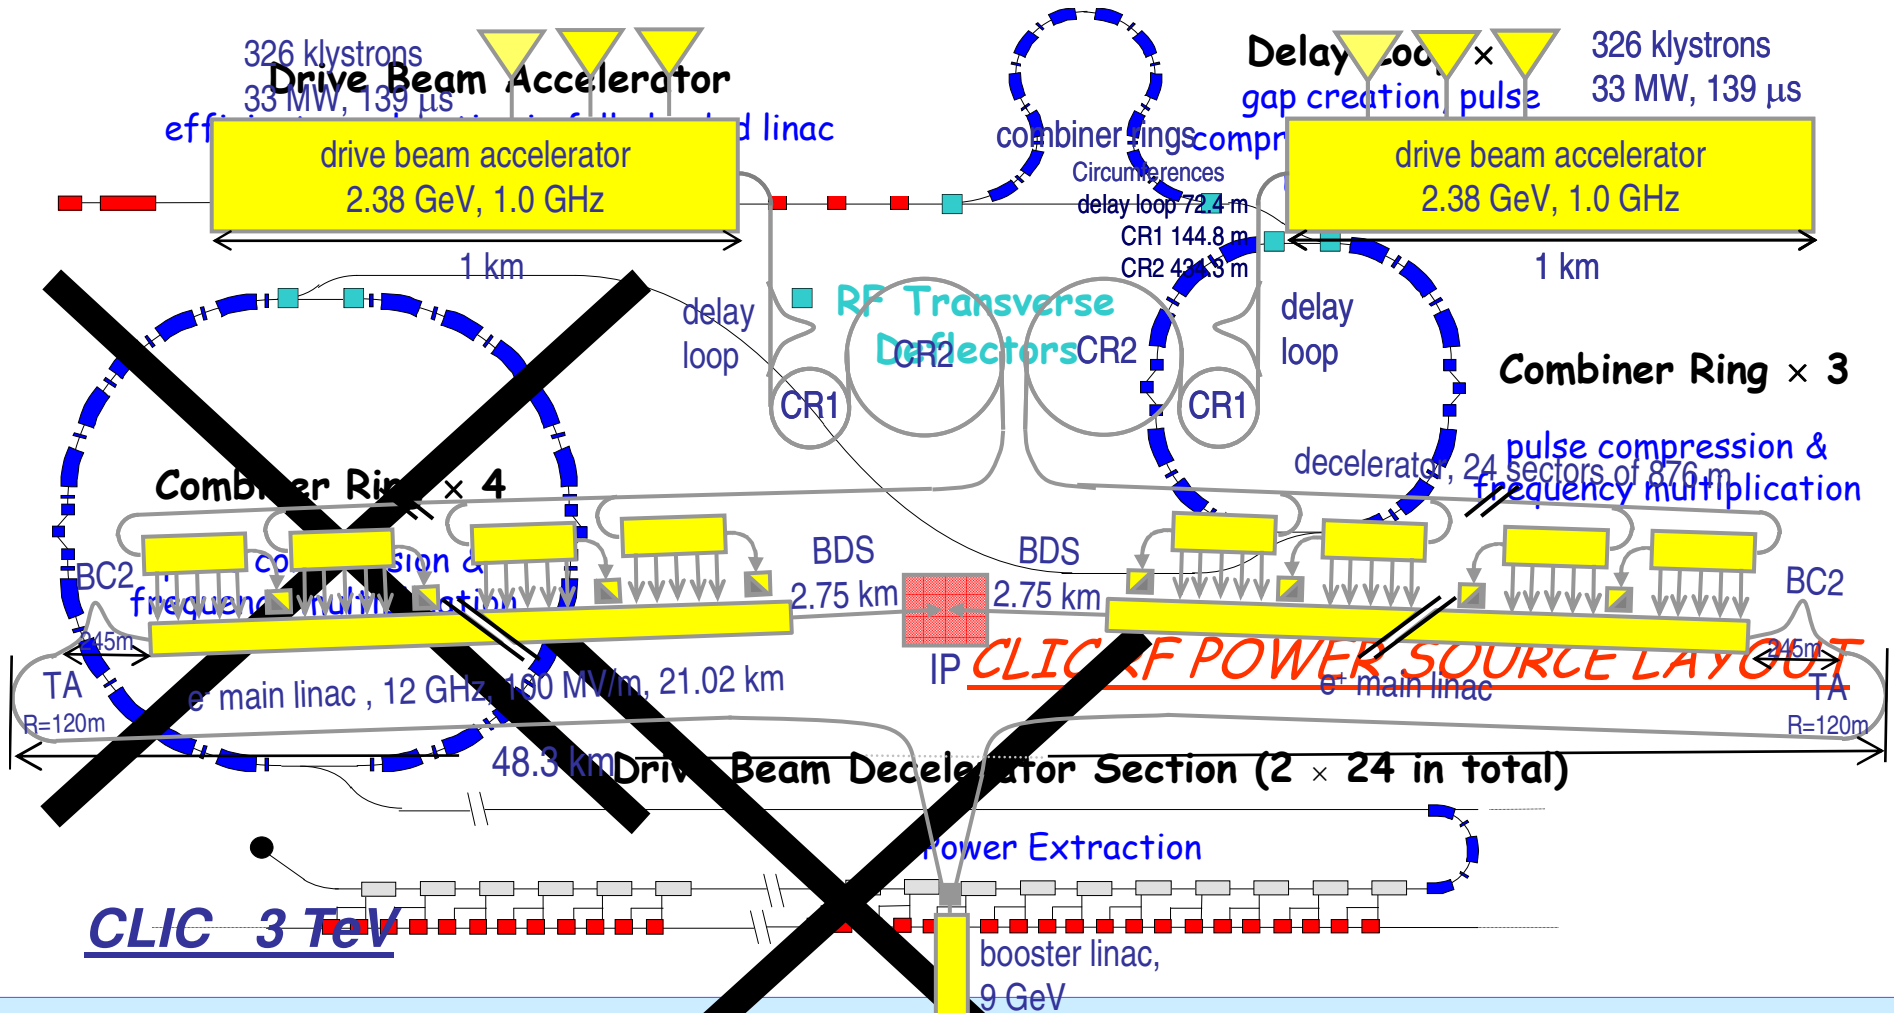


**CLIC 3 TeV**

Drive beam time structure - initial

Drive beam time structure - final

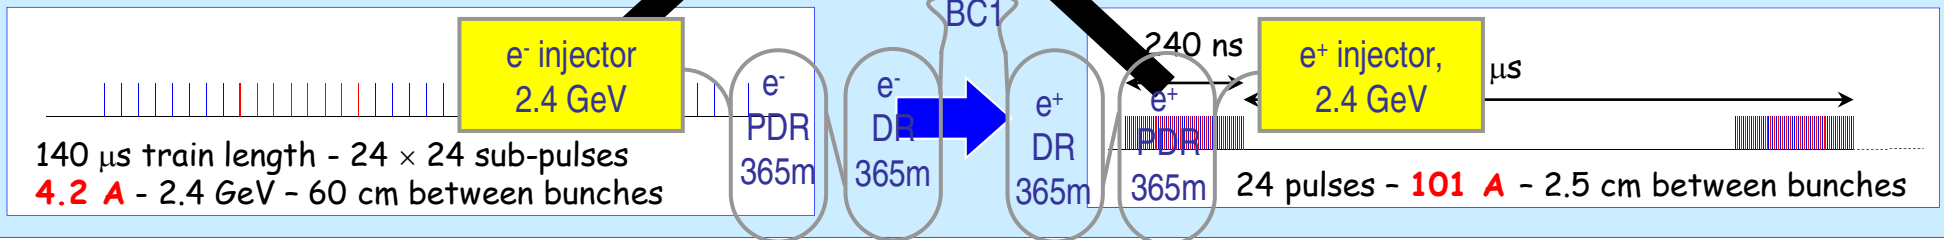




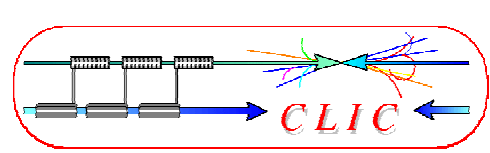


# CTF 3







- demonstrate **Drive Beam generation**  
(fully loaded acceleration, bunch frequency multiplication 8x)
- Test CLIC **accelerating structures**
- Test **power production structures (PETS)**

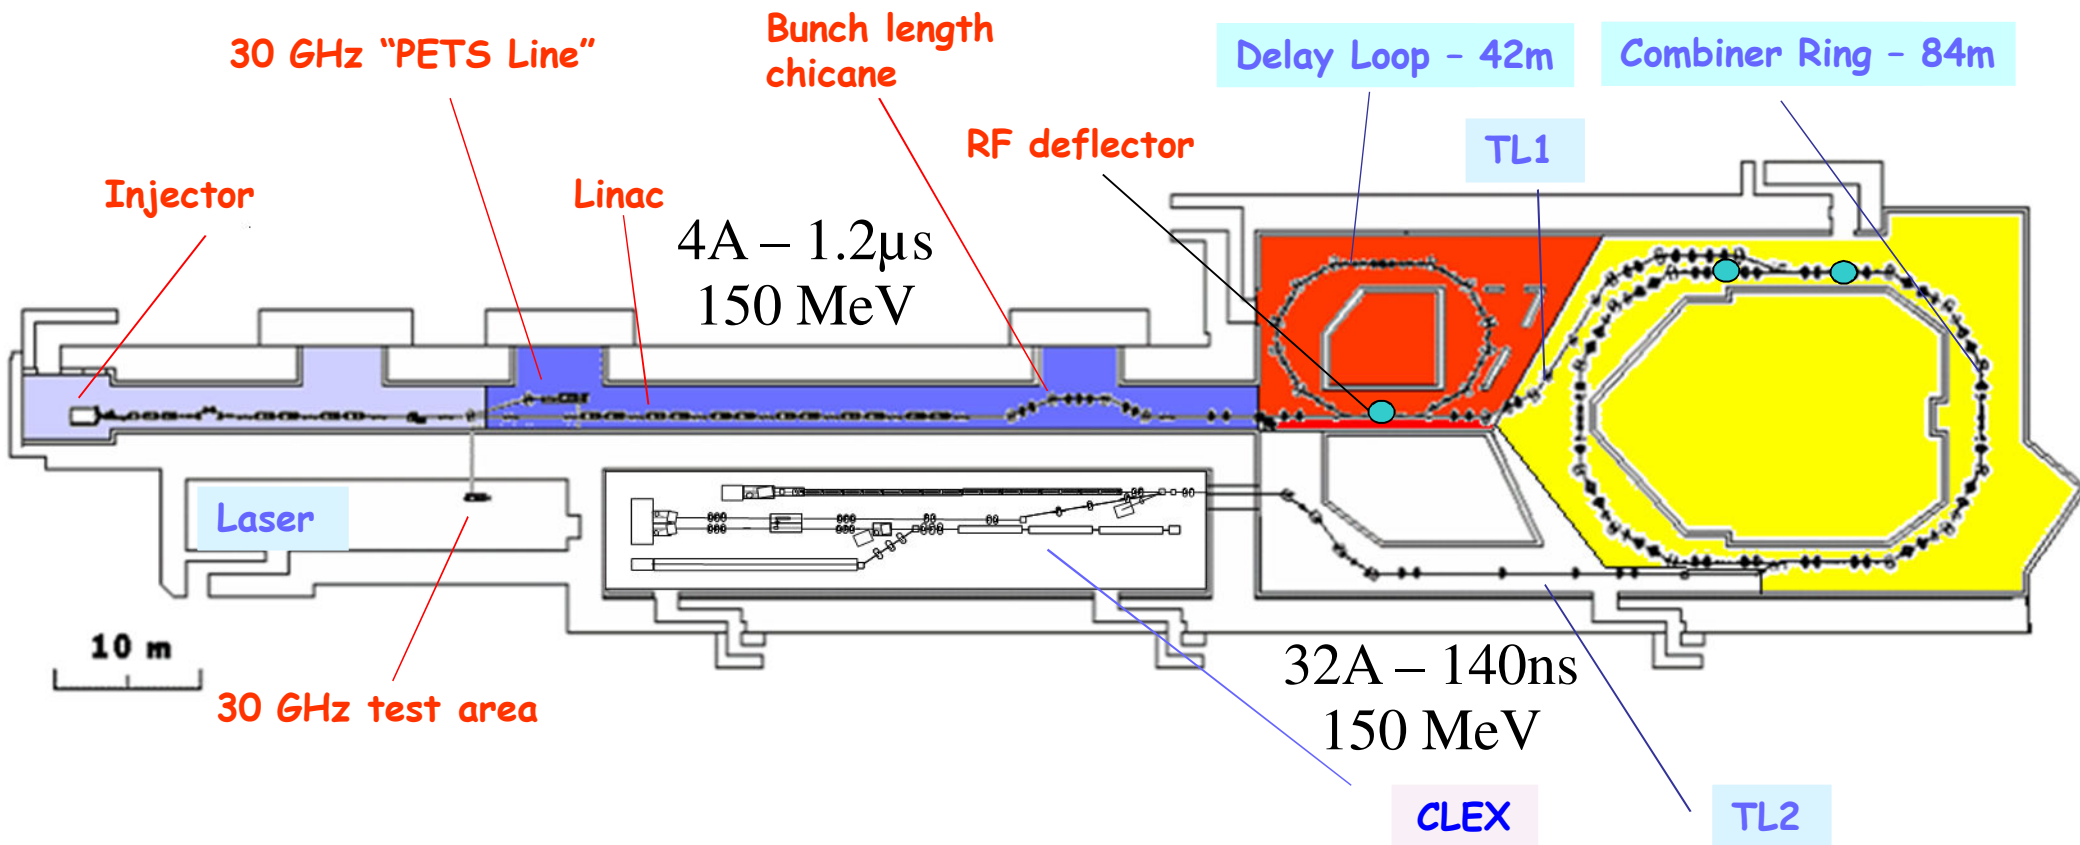


# CTF3 Evolution



- 2003 Injector + part of linac
- 2004 Linac + 30 GHz test stand
- 2005 Delay Loop
- 2006/07 TL1 + Combiner Ring
- 2008/09 New photo-injector, TL2 + CLEX

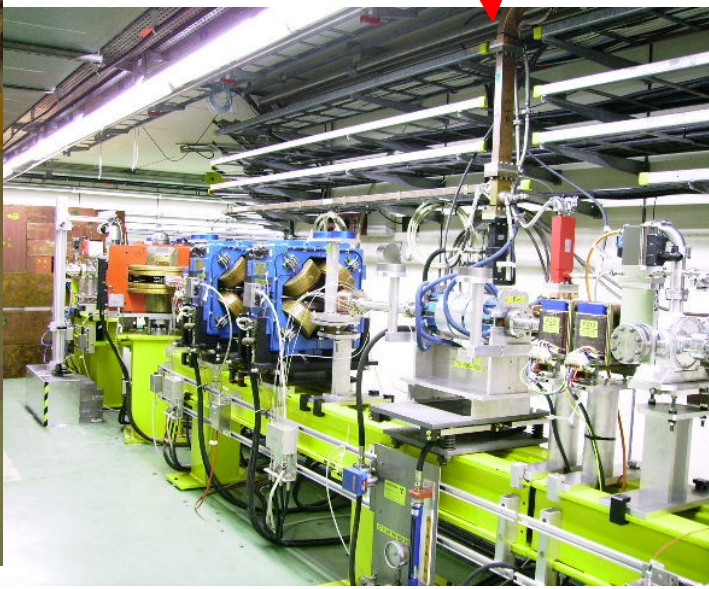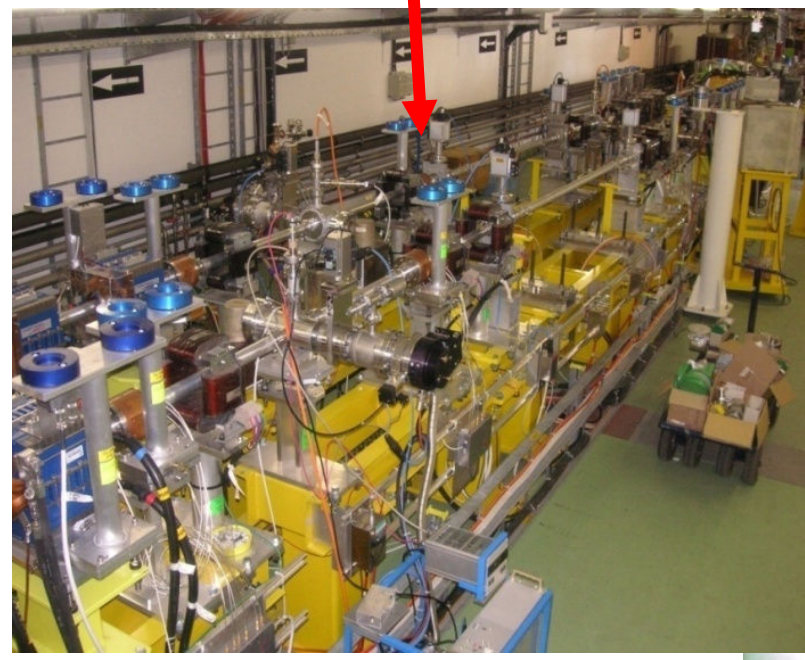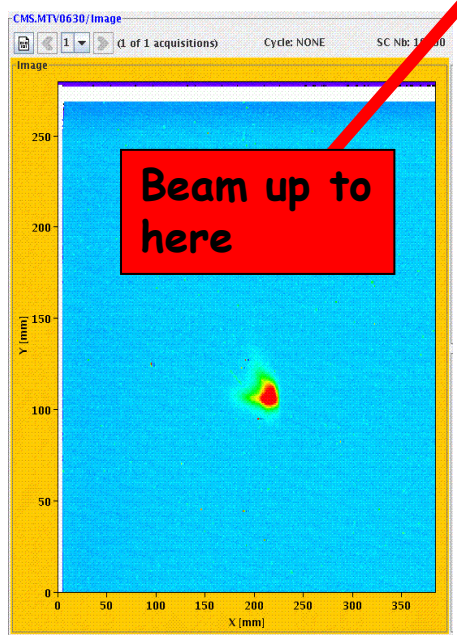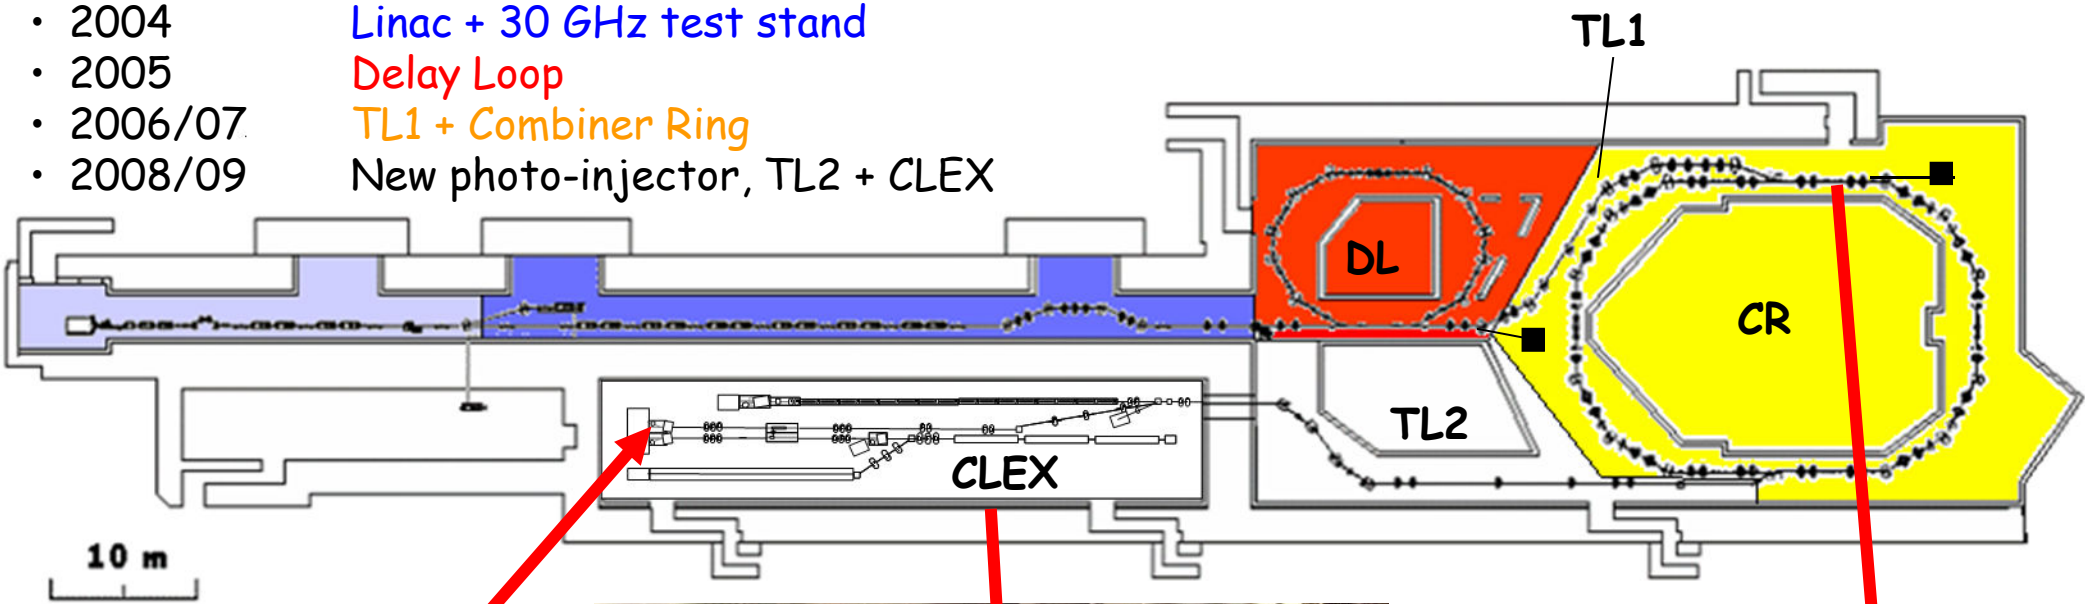



# Fully loaded operation



- **efficient** power transfer from RF to the beam needed


“Standard” situation:

- **small** beam loading
- power at structure exit lost in load

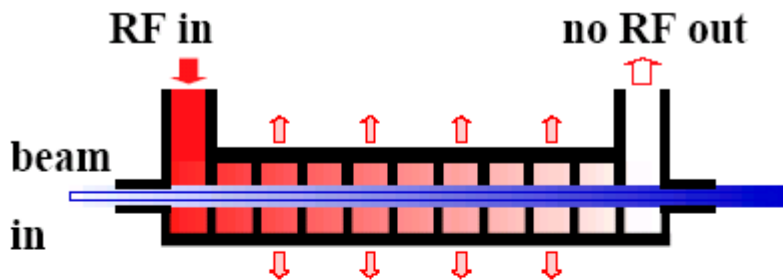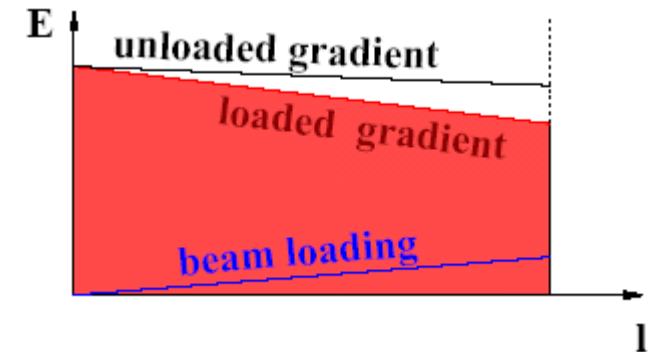


“Efficient” situation:


- high beam current
- **high** beam loading
- no power flows into load
- $V_{ACC} \approx 1/2 V_{unloaded}$

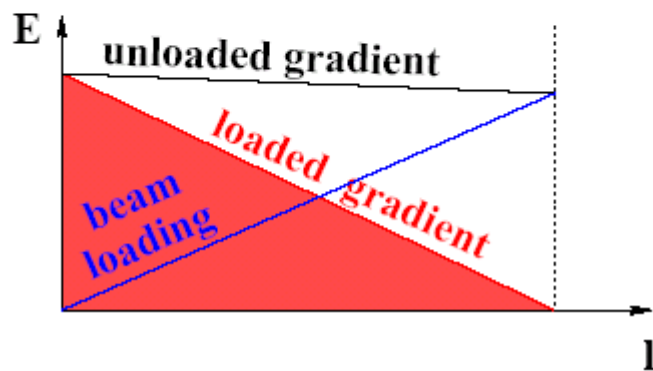




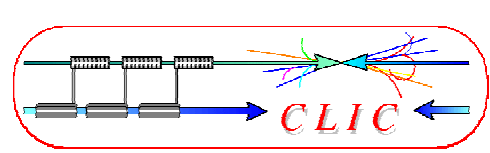

# CTF3 linac acceleration structures

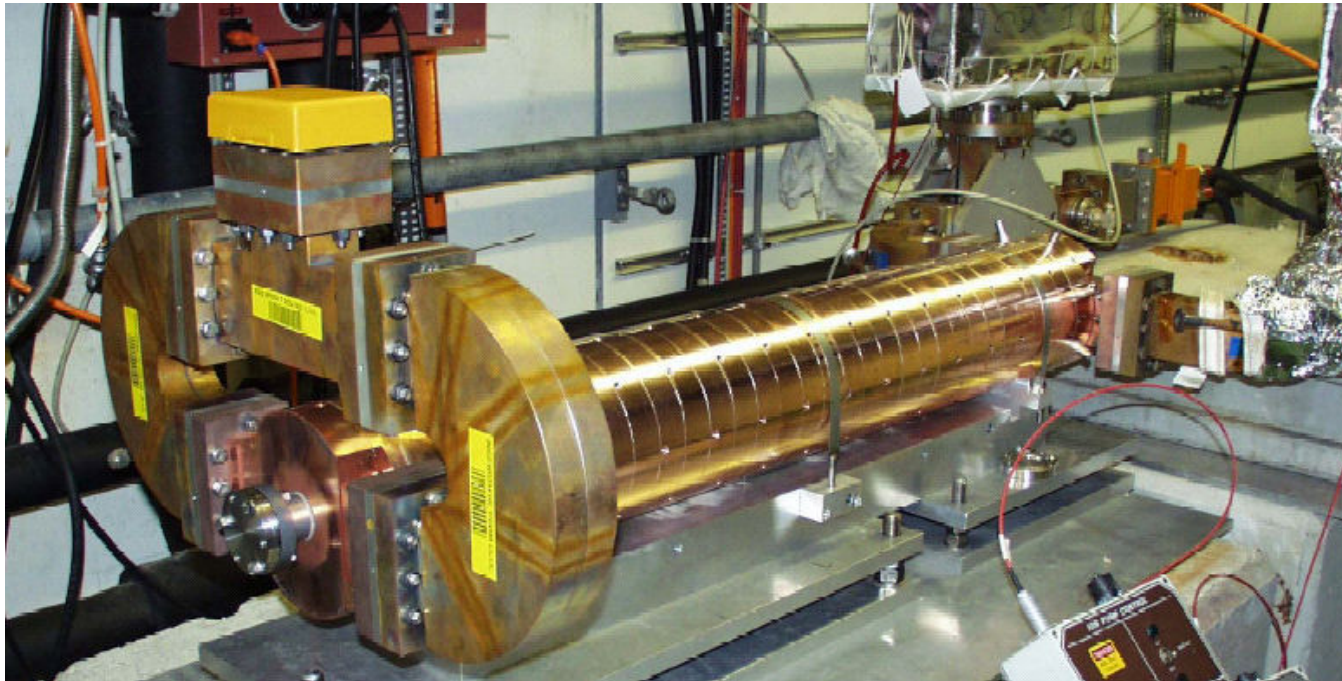

Dipole modes suppressed by slotted iris damping (first dipole's Q factor < 20) and HOM frequency detuning

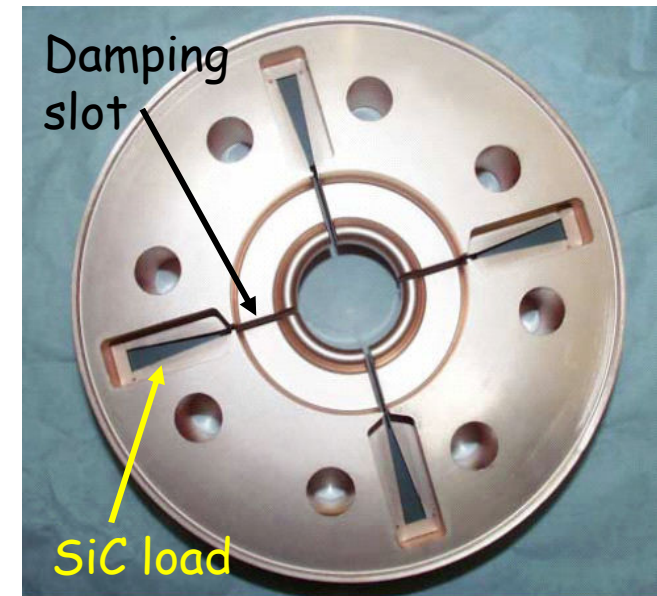


- 3 GHz  $2\pi/3$  traveling wave structure
- constant aperture
- **slotted-iris damping + detuning** with nose cones
- up to 4 A 1.4  $\mu$ s beam pulse stably accelerated


- **Measured RF-to-beam efficiency 95.3%**
- Theory 96% (~ 4 % ohmic losses)





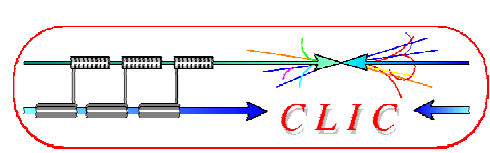

# Delay Loop – full recombination

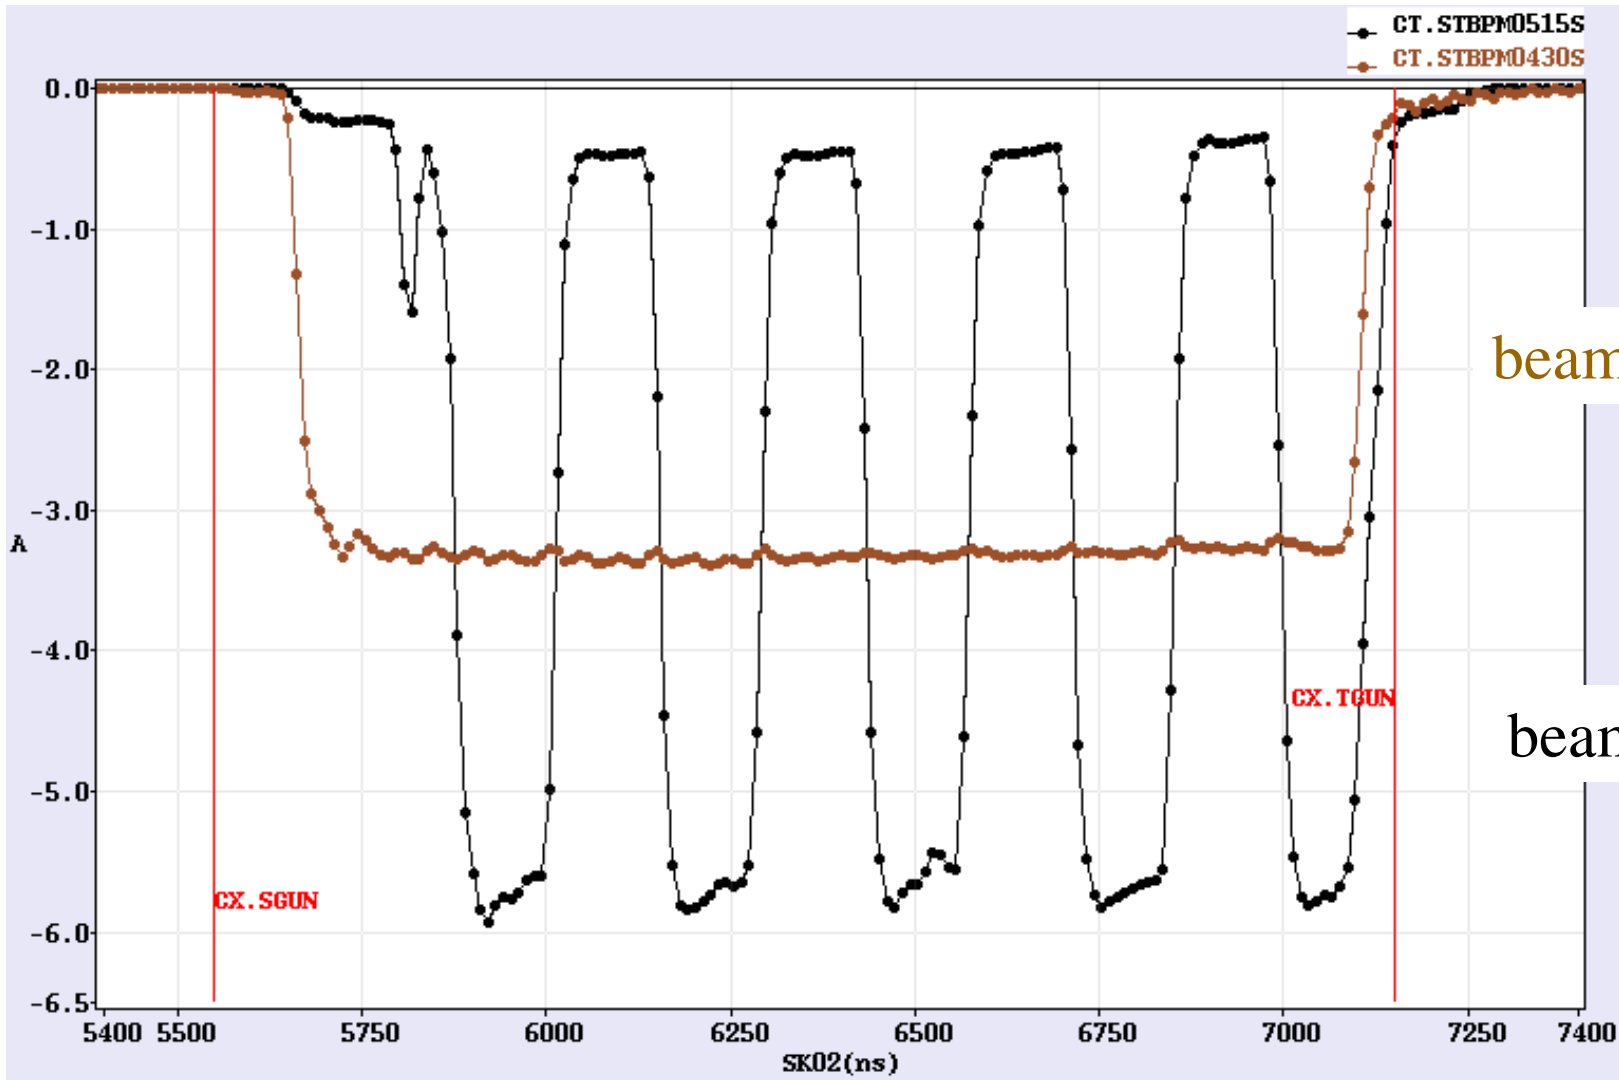


beam before the DL




beam after the DL


- 3.3 A after chicane  $\Rightarrow$   $< 6$  A after combination (satellites)



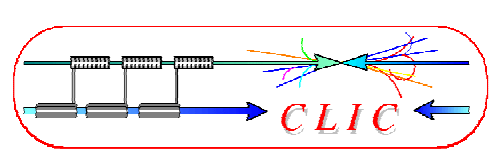

# CTF3 combiner ring

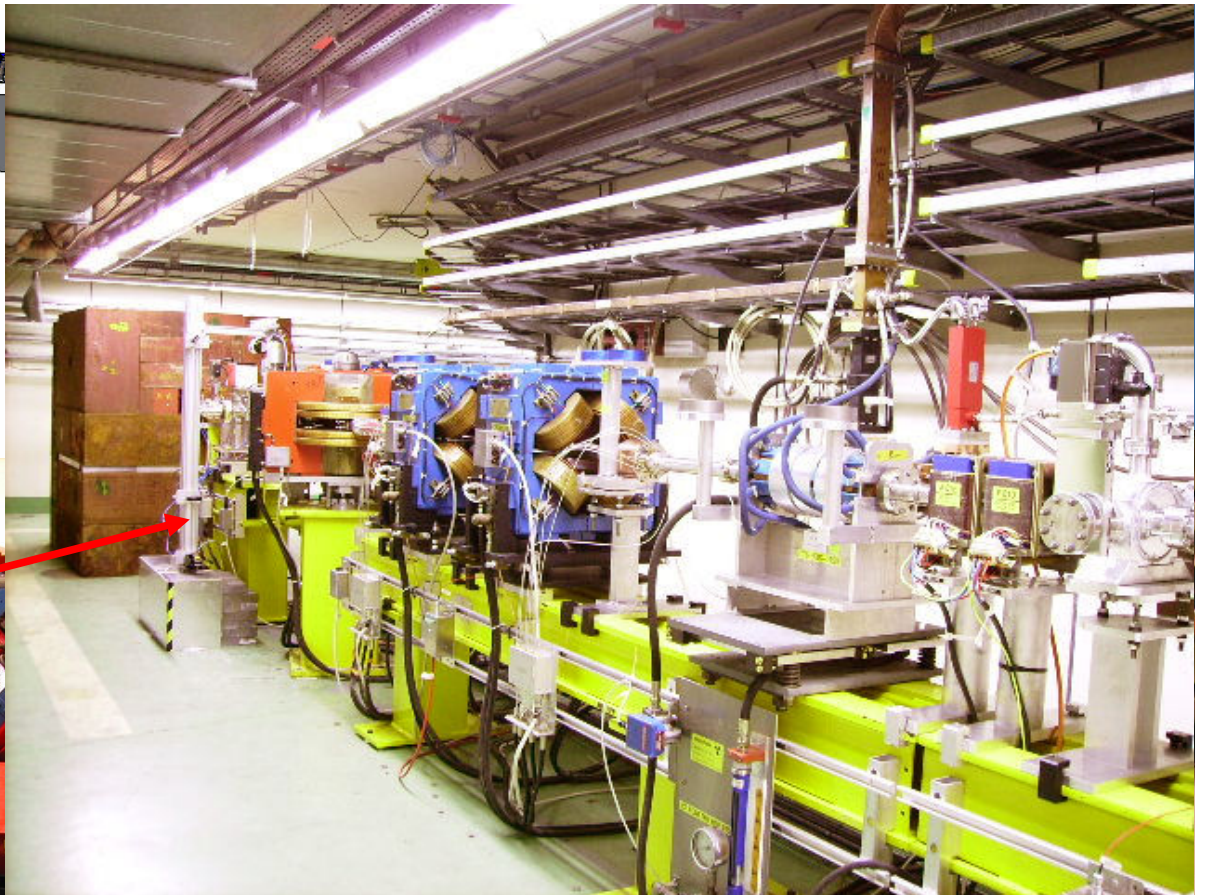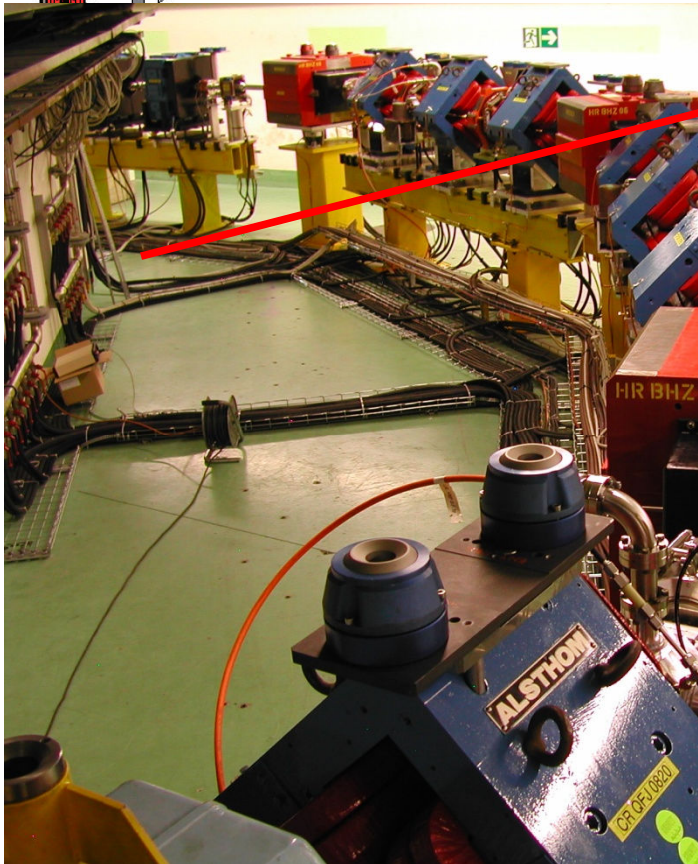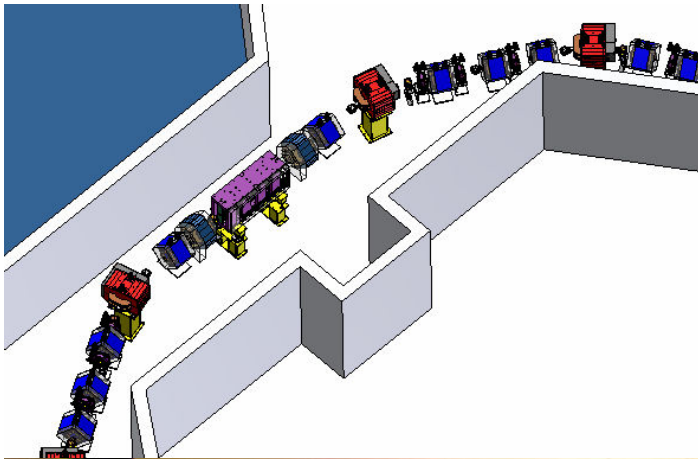


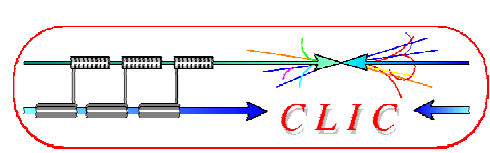


# CTF3 Combiner Ring Status



- First recombination at higher current achieved

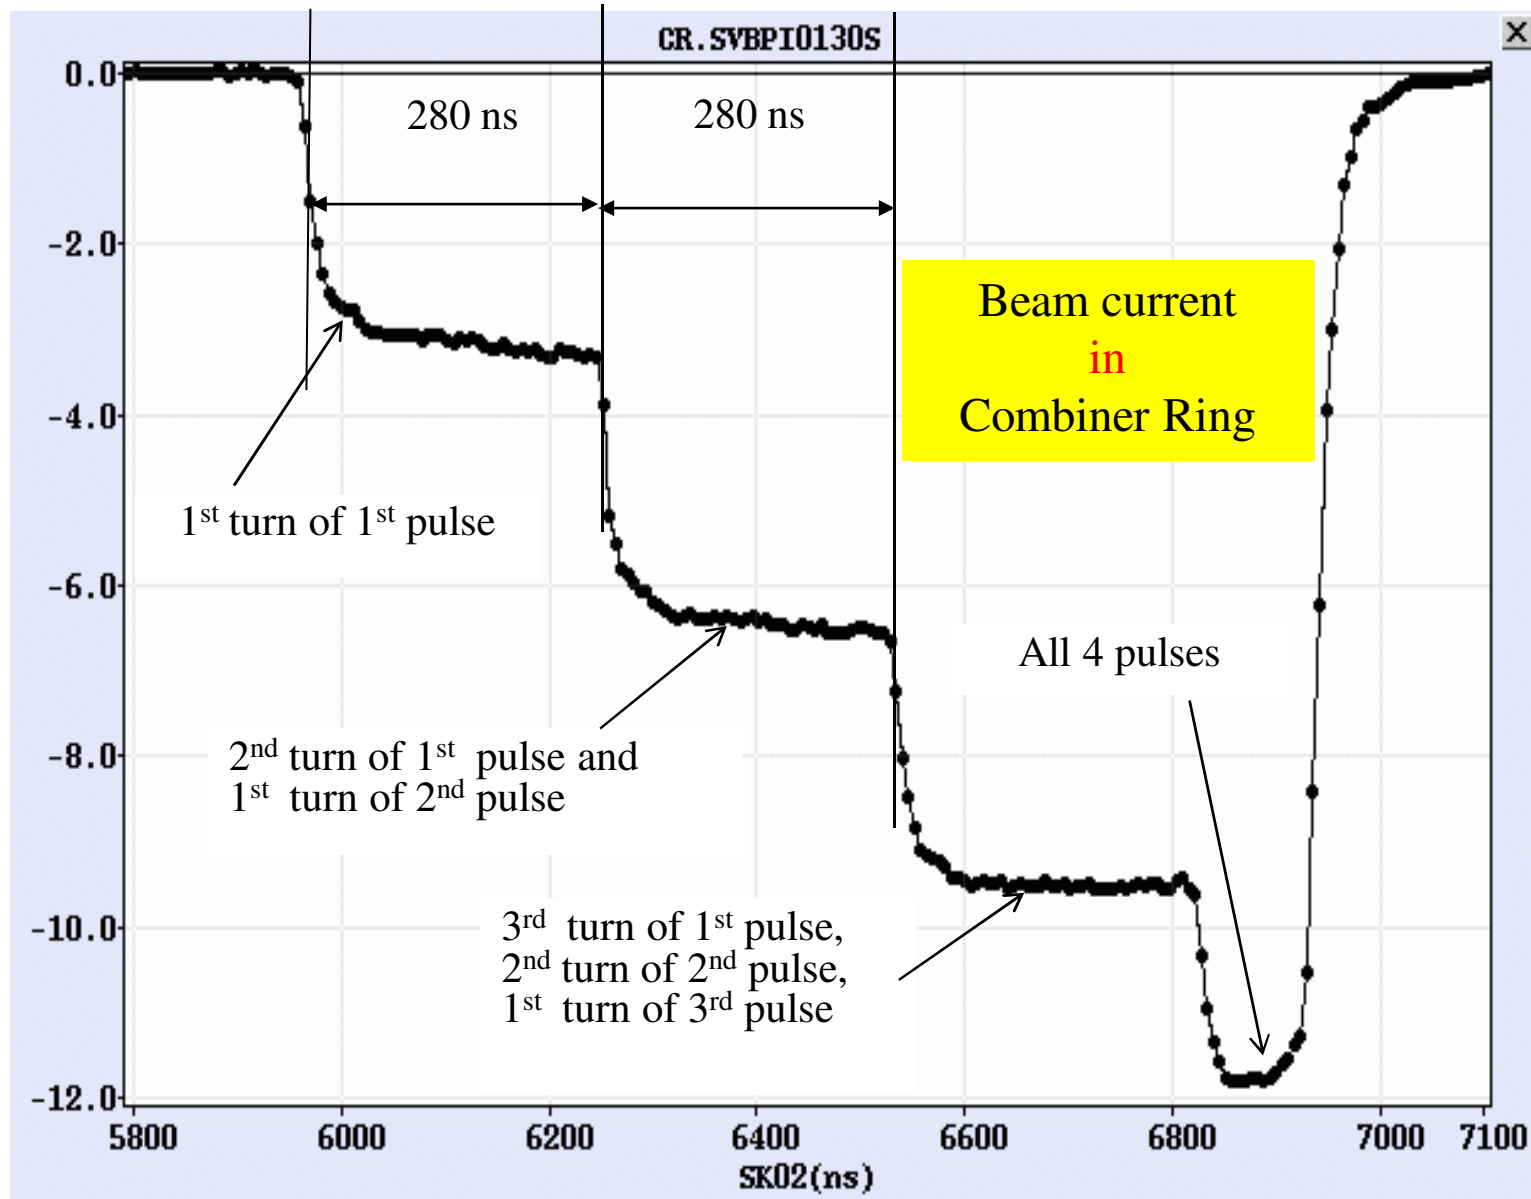






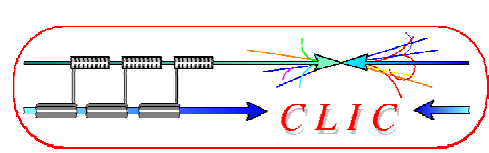


# Power extraction structure PETS


- must extract efficiently several 100 MW power from high current drive beam
- periodically corrugated structure with low impedance (big  $a/\lambda$ )
- ON/OFF mechanism

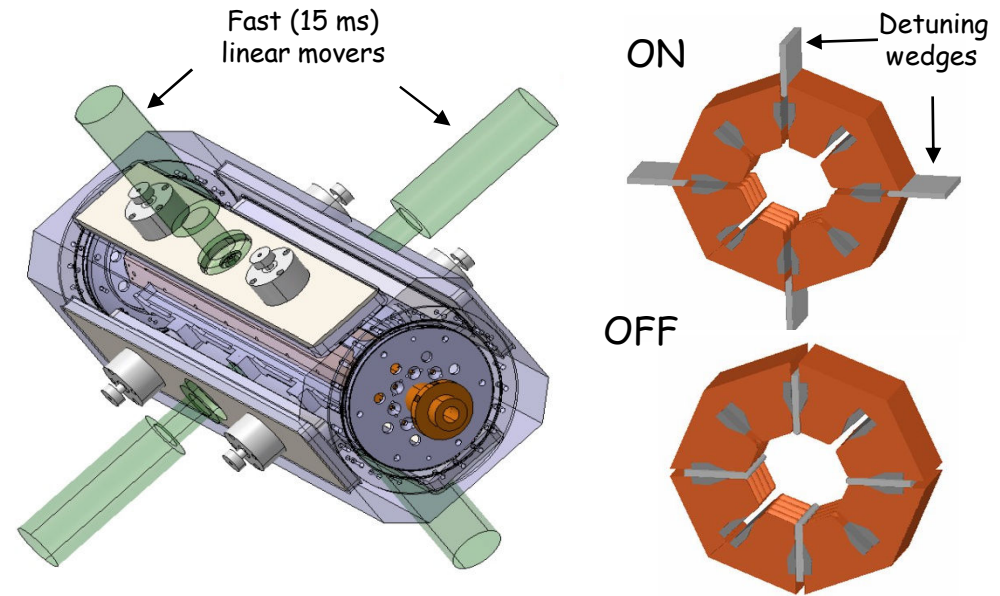


**PETS ON/OFF mechanism**

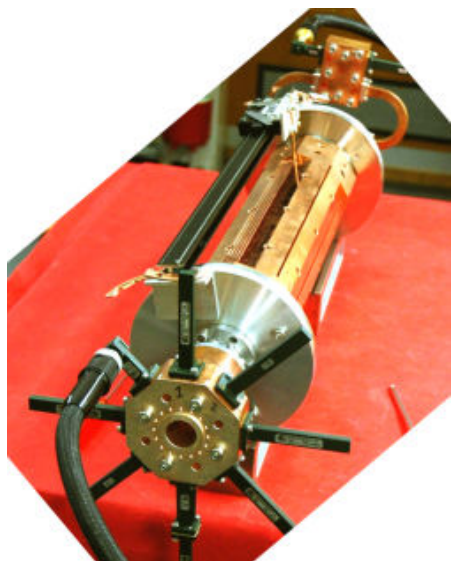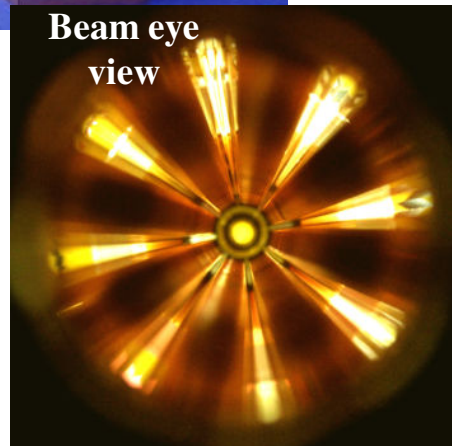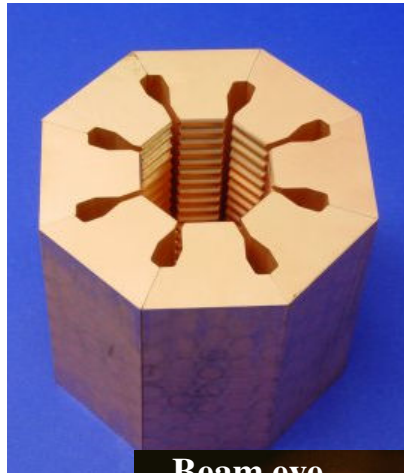


Reconstructed from GDFIDL data  
PETS output pulse envelopes

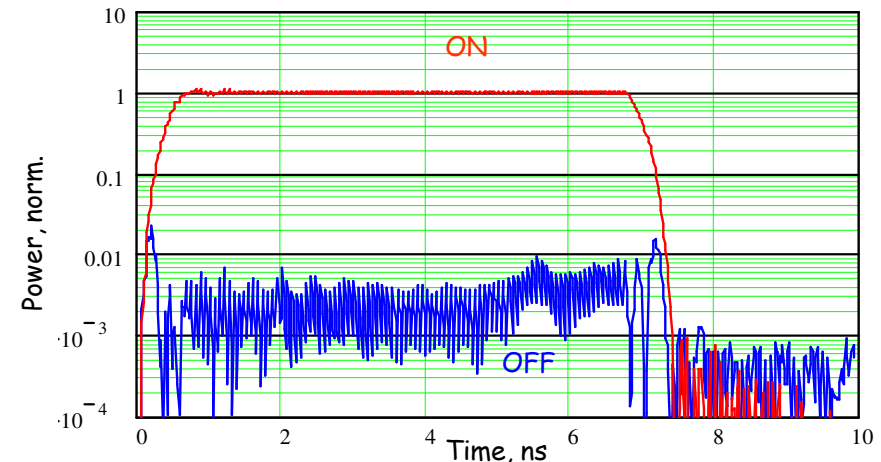

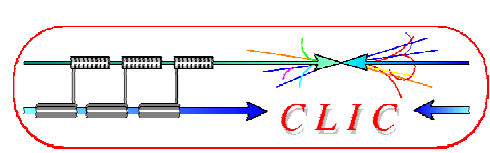


# Field development in a PETS


- The induced fields travel along the PETS structure and build up resonantly (here only dipole fields in animation)

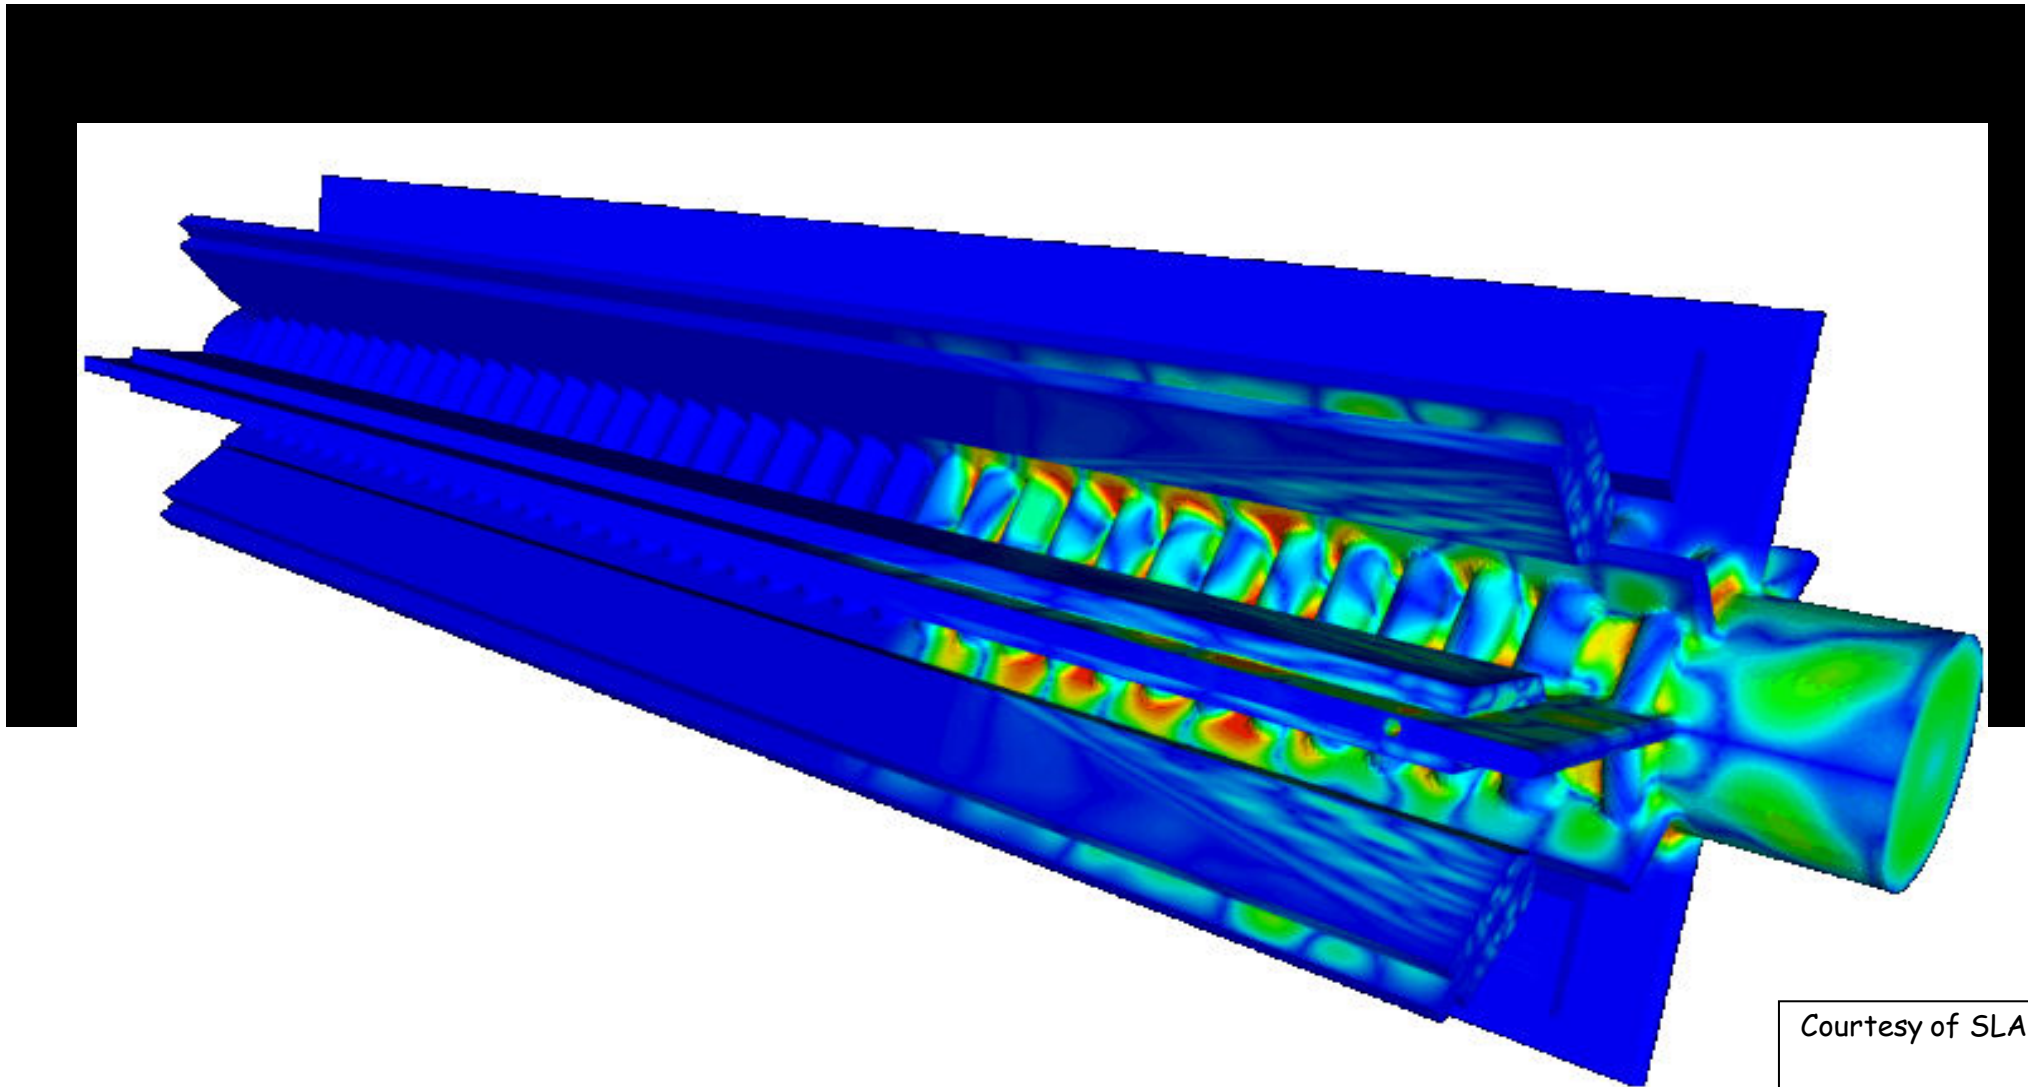

Courtesy of SLAC  
and I.Syratchev

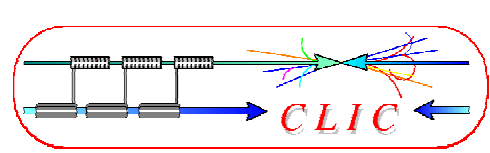

# Linac: transverse wakefields

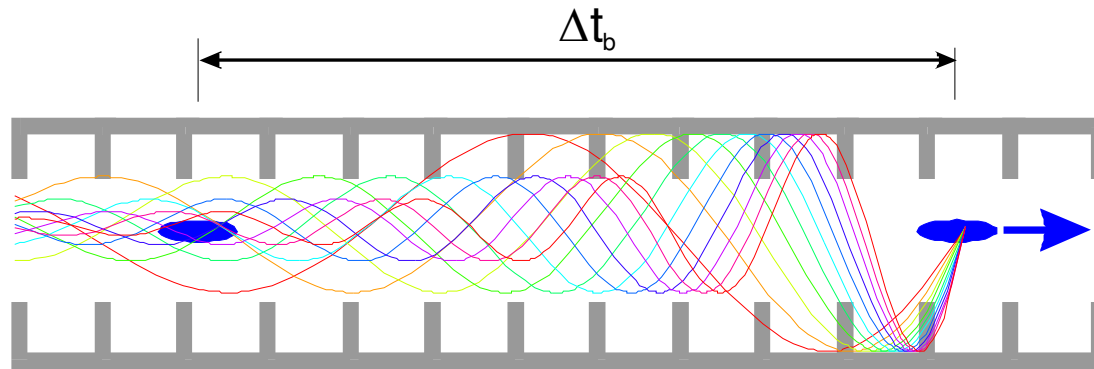


- Bunches **induce field** in the cavities which **perturbs later bunches**
- Fields can build up resonantly
- Bunches passing off-centre excite transverse higher order modes (HOM)
- Later bunches are kicked transversely
- $\Rightarrow$  multi- and single-bunch beam break-up (MBBU, SBBU)




**Emittance growth!!!**

- **Long-range wakefields minimised by structure design**




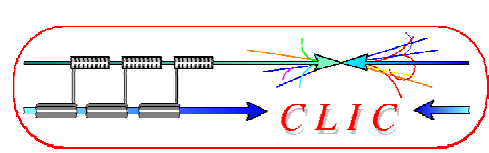


# Accelerating structure developments

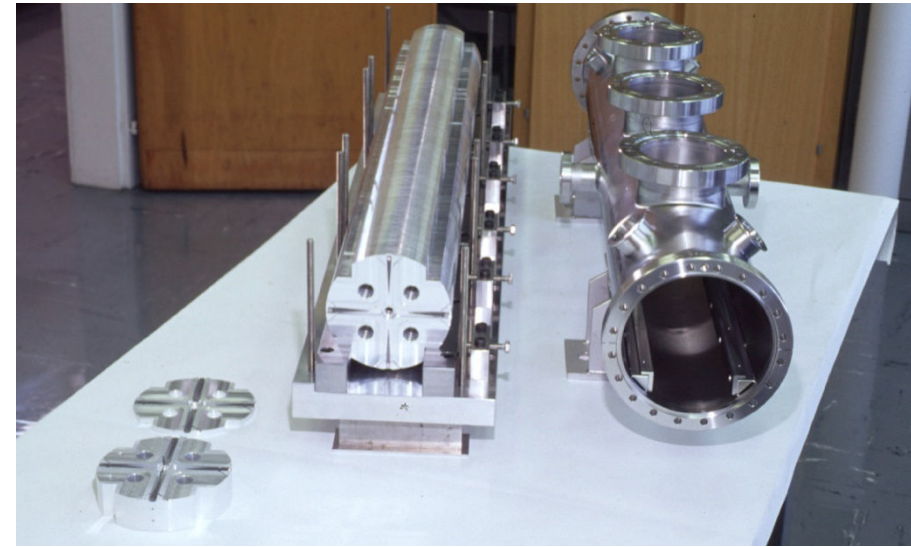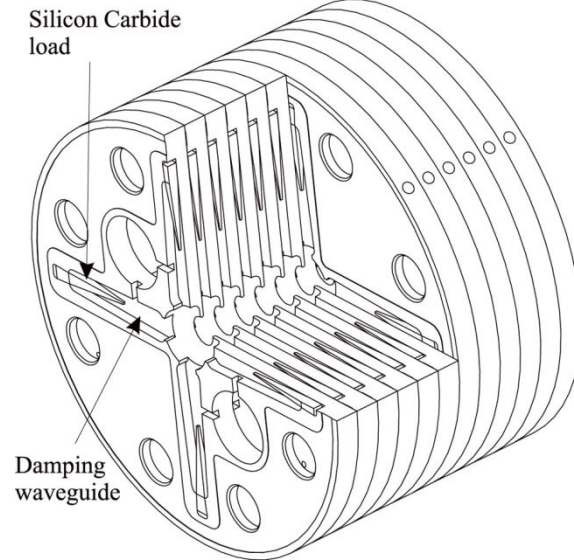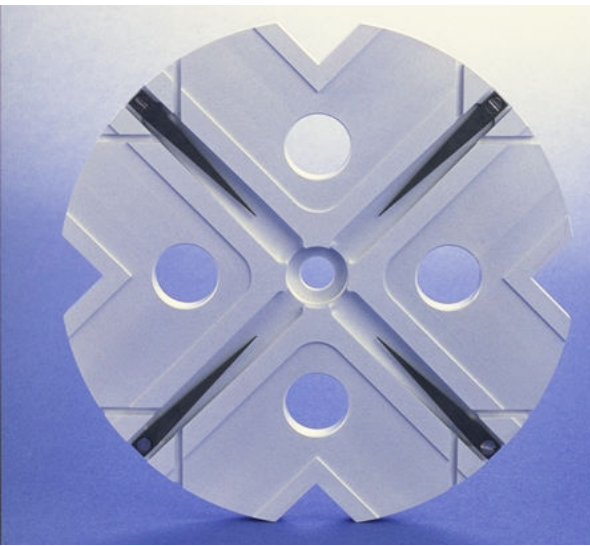

- Structures built from discs
- Each cell **damped** by 4 radial WGs
- terminated by SiC **RF loads**
- HOM enter WG
- Long-range wakefields **efficiently damped**

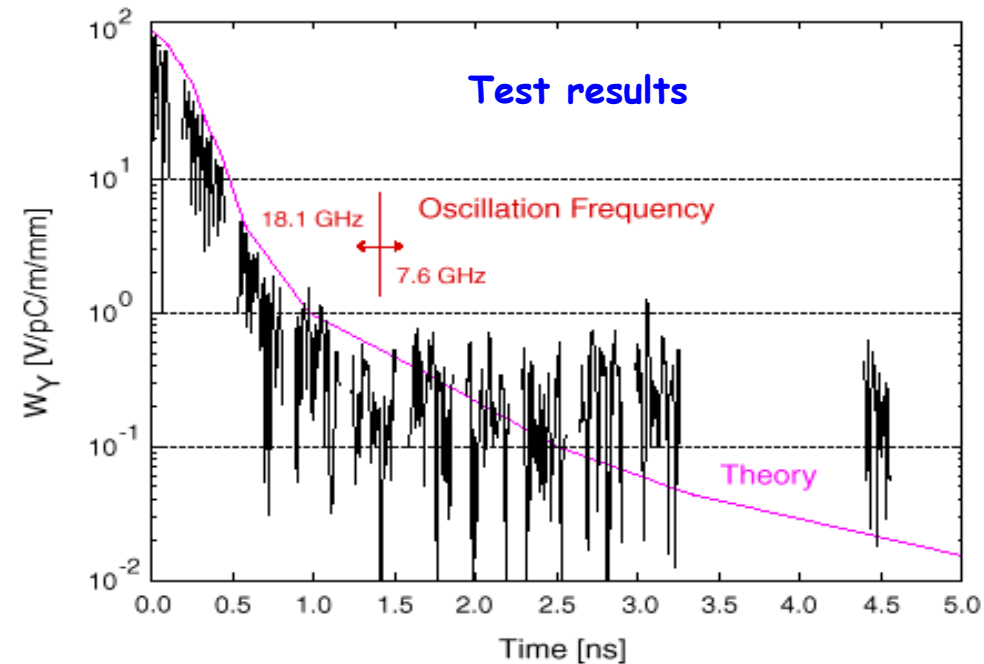




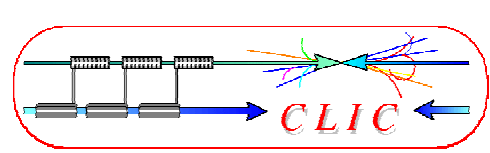


# Structure breakdown and damages



- Cu structures **limited** to surface **fields** of 300-400 MV/m
- Severe **surface damage** noticed

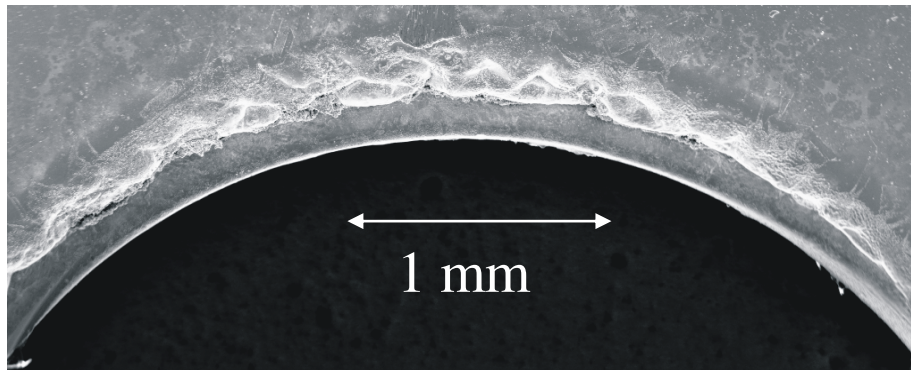



Microscopic image of damaged iris

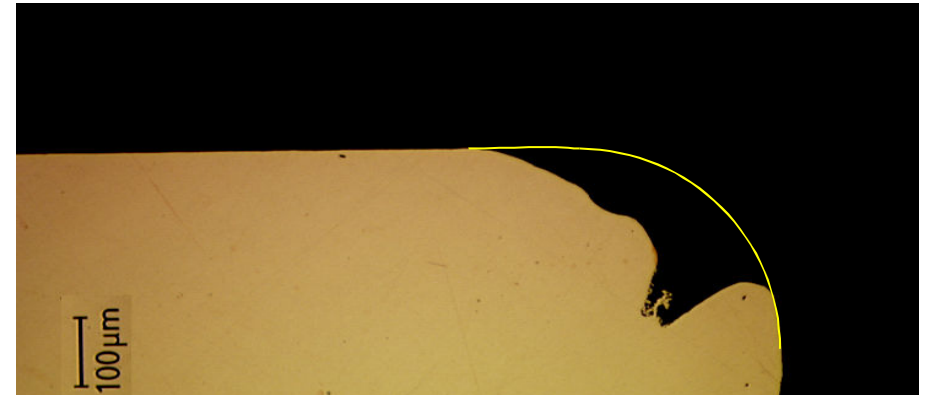

Damaged iris - longitudinal cut


- Two-pronged approach:
  - modify RF design **geometry**  
=> lower  $E_s/E_a \sim 2$
  - investigate new **iris material**
- => Still **R&D required**

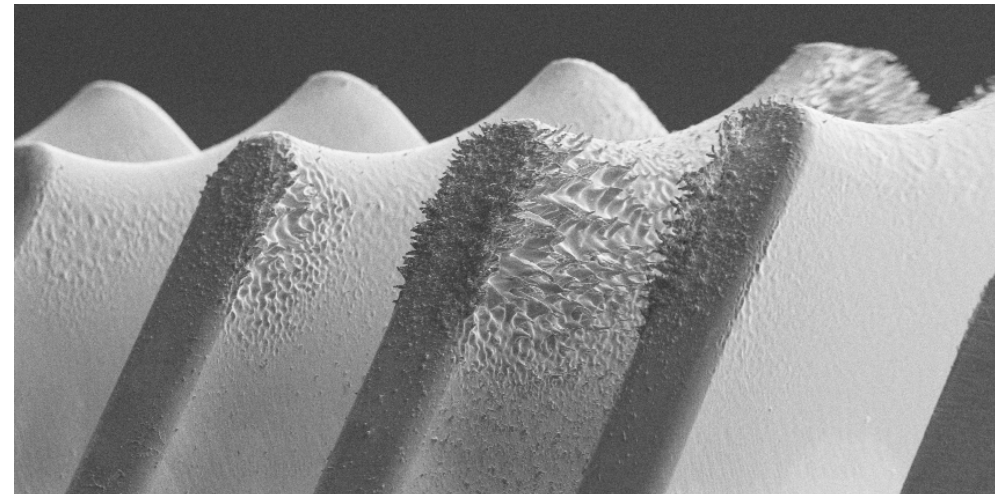


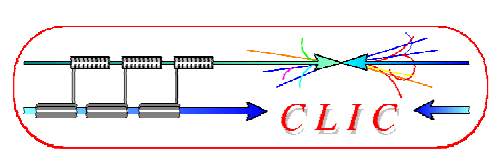


# Achieved accelerating fields in CTF2


High gradient tests of new structures with **molybdenum** irises reached **190 MV/m** peak accelerating gradient **without any damage** well above the nominal CLIC accelerating field of **100 MV/m** but with RF pulse length of **16 ns** only (nominal **150 ns**)

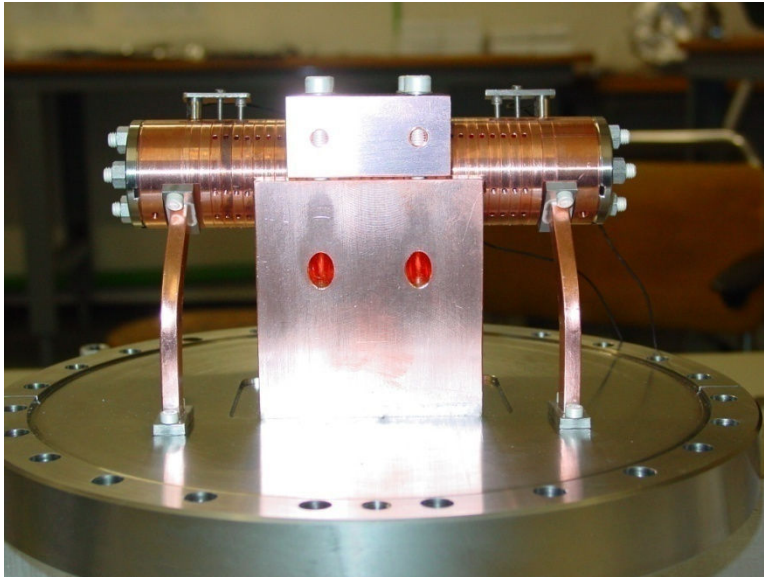

30 cell clamped tungsten-iris structure

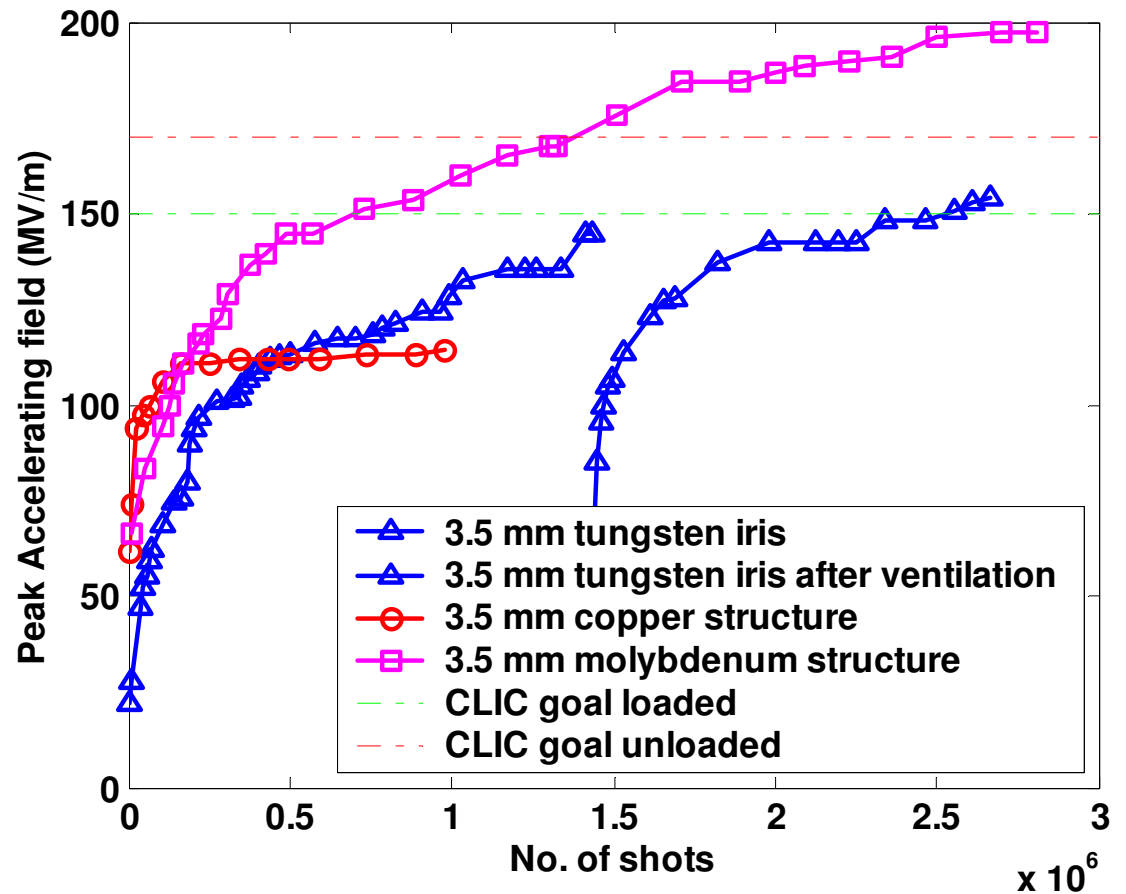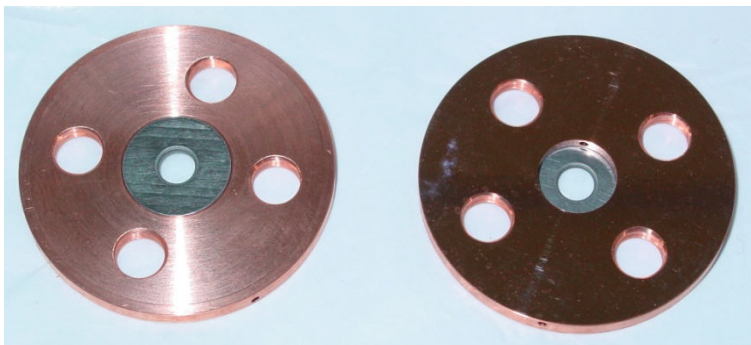



**A world record !!!**

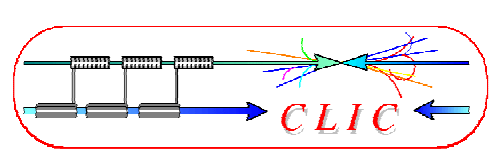


# 11.4 GHz High-Power test results



Recent SLAC High-Power test results – 11.4 GHz

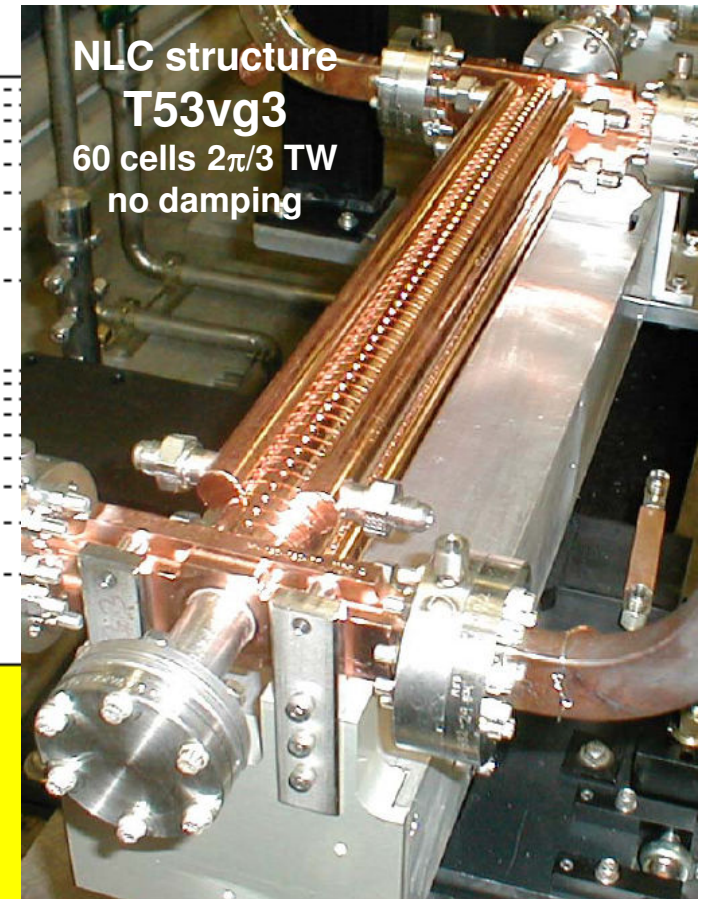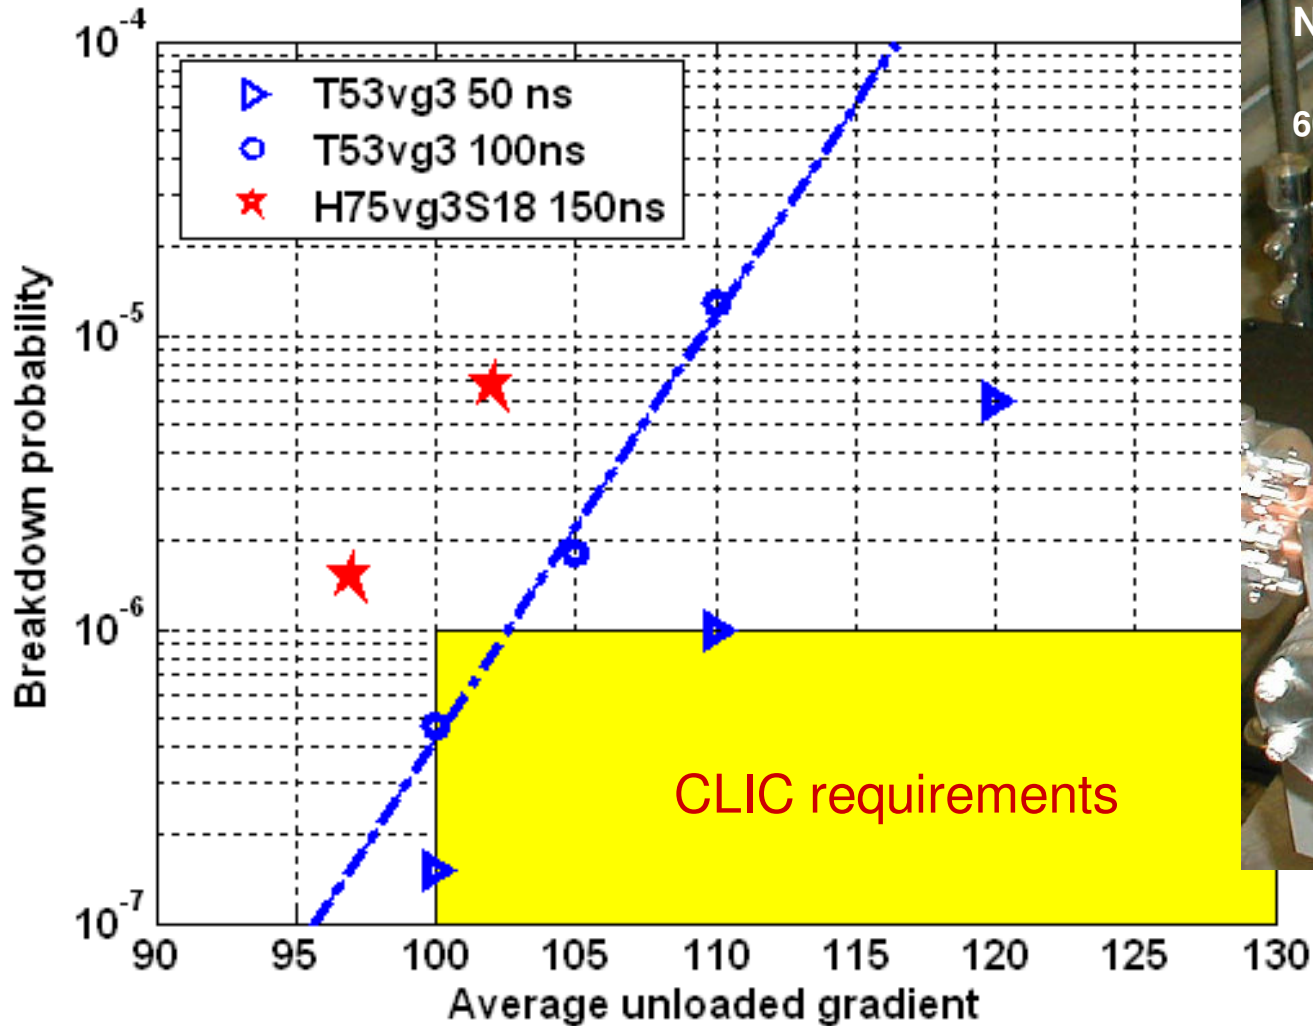



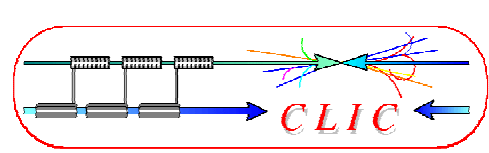



# CLIC and ILC timeline




From B. Barish, ILC Global Design Effort director

2005      2006      2007      2008      2009      2010

## The GDE Plan and Schedule

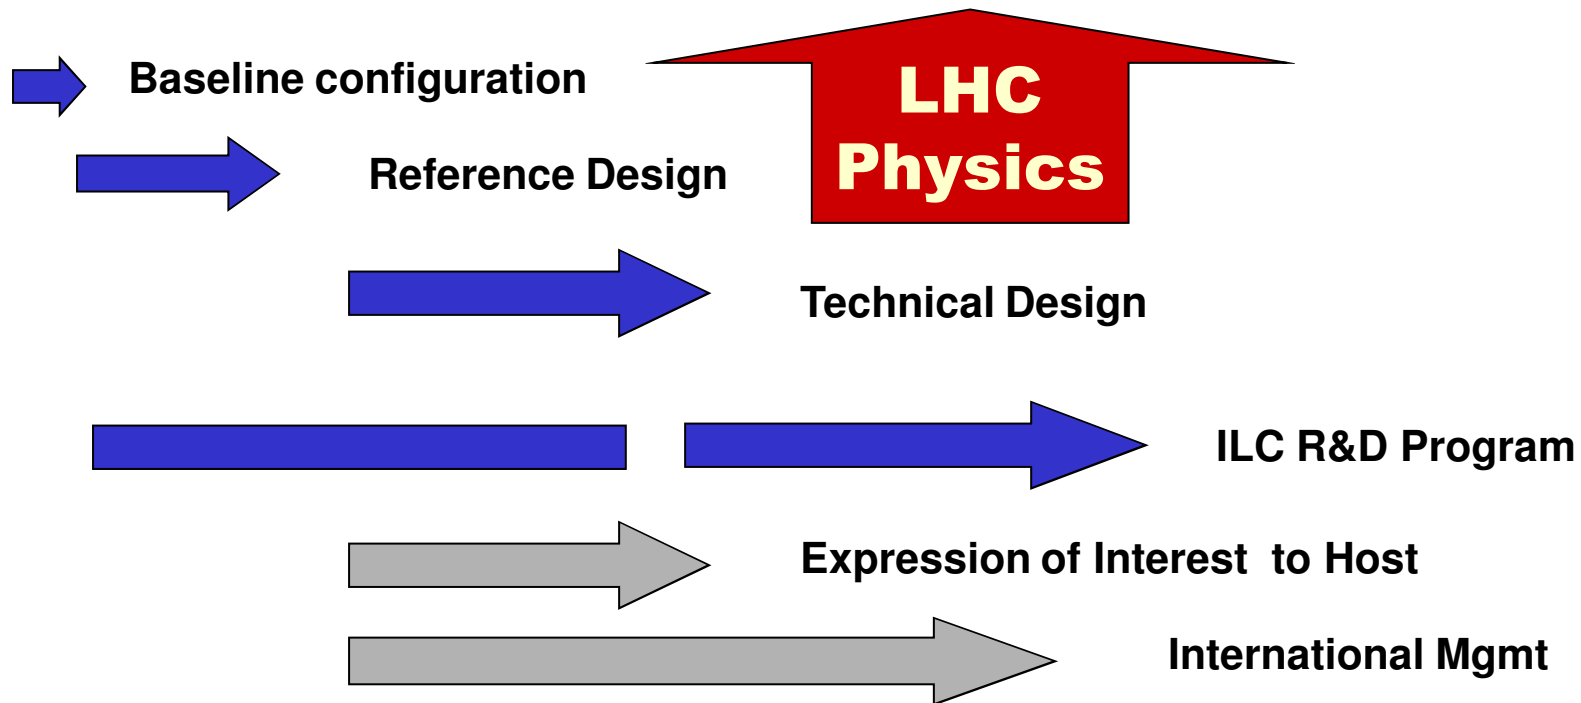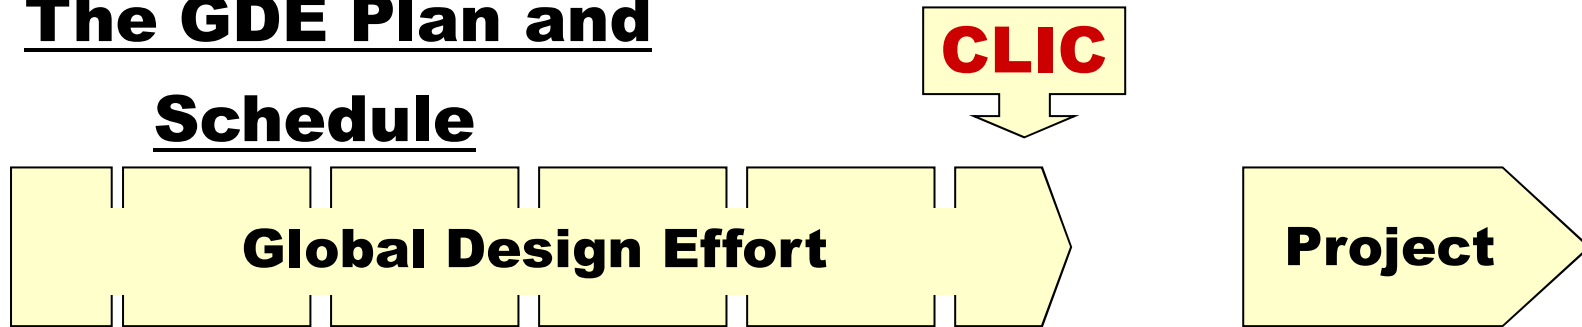




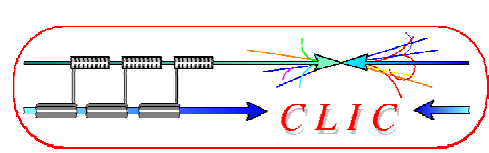

# CONCLUSION



- World-wide Consensus for a **Lepton Linear Collider** as the **next HEP facility** to complement LHC at the energy frontier
- Presently **two** Linear Collider **Projects**:
  - **International Linear Collider** based on Super-Conducting RF technology with extensive R&D in world-wide collaboration:
    - First phase at 500 GeV beam collision energy, upgrade to 1 TeV
    - in Technical Design phase
  - **CLIC** technology **only** possible scheme to extend collider beam energy into **Multi-TeV energy** range
    - Very **promising results** but not mature yet, requires **challenging R&D**
    - CLIC-related key issues addressed in CTF3 by 2010
- Possible decision from 2010-12 based on **LHC results**
- Looking forward to a successful LHC operation

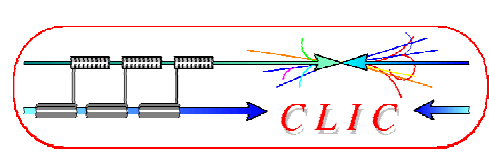

# Documentation



- General documentation about the CLIC study: <http://cern.ch/CLIC-Study/>
- CLIC scheme description: <http://preprints.cern.ch/yellowrep/2000/2000-008/p1.pdf>
- Recent Bulletin article: <http://cdsweb.cern.ch/journal/article?issue=28/2009&name=CERNBulletin&category=News%20Articles&number=1>
- CLIC Physics <http://clicphysics.web.cern.ch/CLICphysics/>
- CLIC Test Facility: CTF3 <http://ctf3.home.cern.ch/ctf3/CTFindex.htm>
- CLIC technological challenges (CERN Academic Training) <http://indico.cern.ch/conferenceDisplay.py?confId=a057972>
- CLIC Workshop 2008 (most actual information) <http://cern.ch/CLIC08>
- EDMS <http://edms.cern.ch/nav/CERN-0000060014>
- CLIC ACE (advisory committee meeting) <http://indico.cern.ch/conferenceDisplay.py?confId=58072>
- CLIC meeting (parameter table) <http://cern.ch/clic-meeting>
- CLIC parameter note <http://cern.ch/tecker/par2007.pdf>
- CLIC notes <http://cdsweb.cern.ch/collection/CLIC%20Notes>