Tutorial at the ACM SIGKDD conference, 2011
http://snap.stanford.edu/proj/socmedia-kdd

Social Media Analytics : Part 1: Information flow

Jure Leskovec
Stanford University

Information and Networks

- Information reaches us…
  - …by personal influence in our social networks
  - …through transmission by mass media
- Social Media is media designed to be disseminated through Social interaction
  - How does information transmitted by the media interact with the personal influence arising from social networks?
  - Tension between global effects from the mass media and local effects carried by social structure

Social Media: Big change

- Web is no longer a static library that people passively browse
- Web is a place where people:
  - Consume and create content
  - Interact with other people:
    - Internet forums, Blogs, Social networks, Twitter, Wikis, Podcasts, Slide sharing, Bookmark sharing, Product reviews, Comments, …
- Facebook traffic tops Google (for USA)
  - March 2010: FB > 7% of US traffic

    http://money.cnn.com/2010/03/16/technology/facebook_most_visited

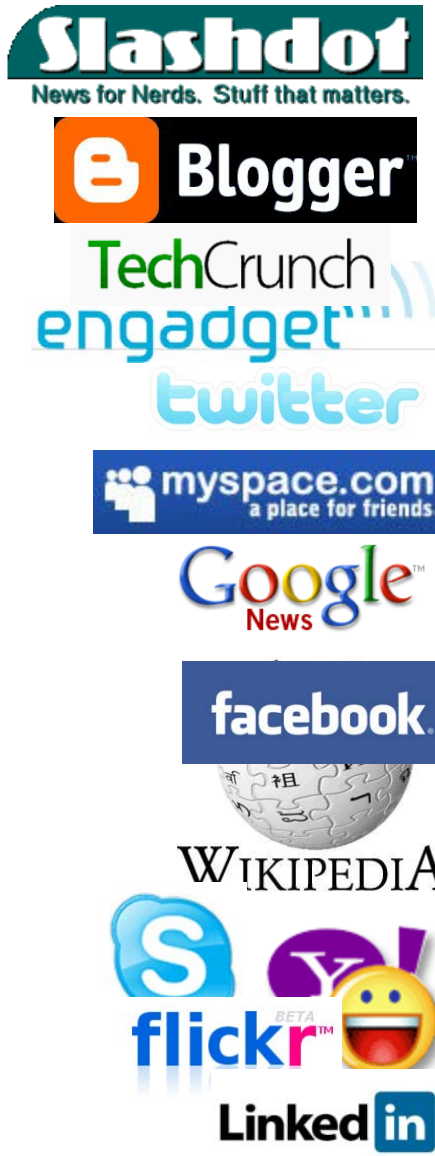

Social Media: Rich & Big Data

- Rich and big data:
  - Billions users, billions contents
  - Textual, Multimedia (image, videos, etc.)
  - Billions of connections
  - Behaviors, preferences, trends...
- Data is open and easy to access
  - It’s easy to get data from Social Media
  - Datasets
  - Developers APIs
  - Spidering the Web

Social Media Datasets

For the list of datasets see tutorial website:
http://snap.stanford.edu/proj/socmedia-kdd
and also: http://snap.stanford.edu/data

- Social Tagging:
  - CiteULike, Bibsonomy, MovieLens, Delicious, Flickr, Last.FM...
  - http://kmi.tugraz.at/staff/markus/datasets/
- Yahoo! Firehose
  - 750K ratings/day, 8K reviews/day, 150K comments/day, status updates, Flickr, Delicious...
  - http://developer.yahoo.net/blog/archives/2010/04/yahoo_updates_firehose.html
- MySpace data (real-time data, multimedia content, ...)
  - http://blog.infochimps.org/2010/03/12/announcing-bulk-redistribution-ofmyspace-data/
- Spinn3r Blog Dataset, JDPA Sentiment Corpus
  - http://www.icwsm.org/data/

Social Media: Opportunities

- Any user can share and contribute content, express opinions, link to others
- This means: Can data-mine opinions and behaviors of millions of users to gain insights into:
  - Human behavior
  - Marketing analytics
  - Product sentiment

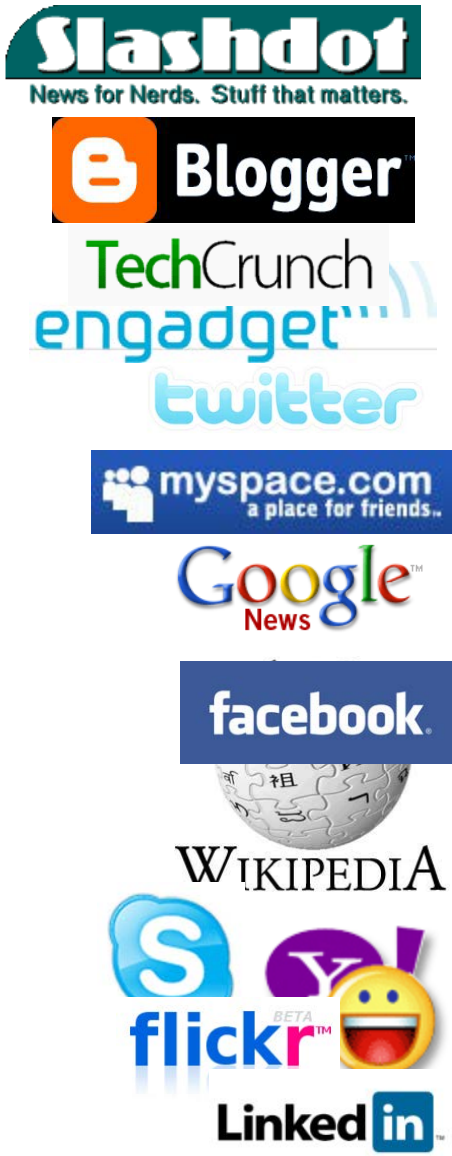

Social Media: Value proposition

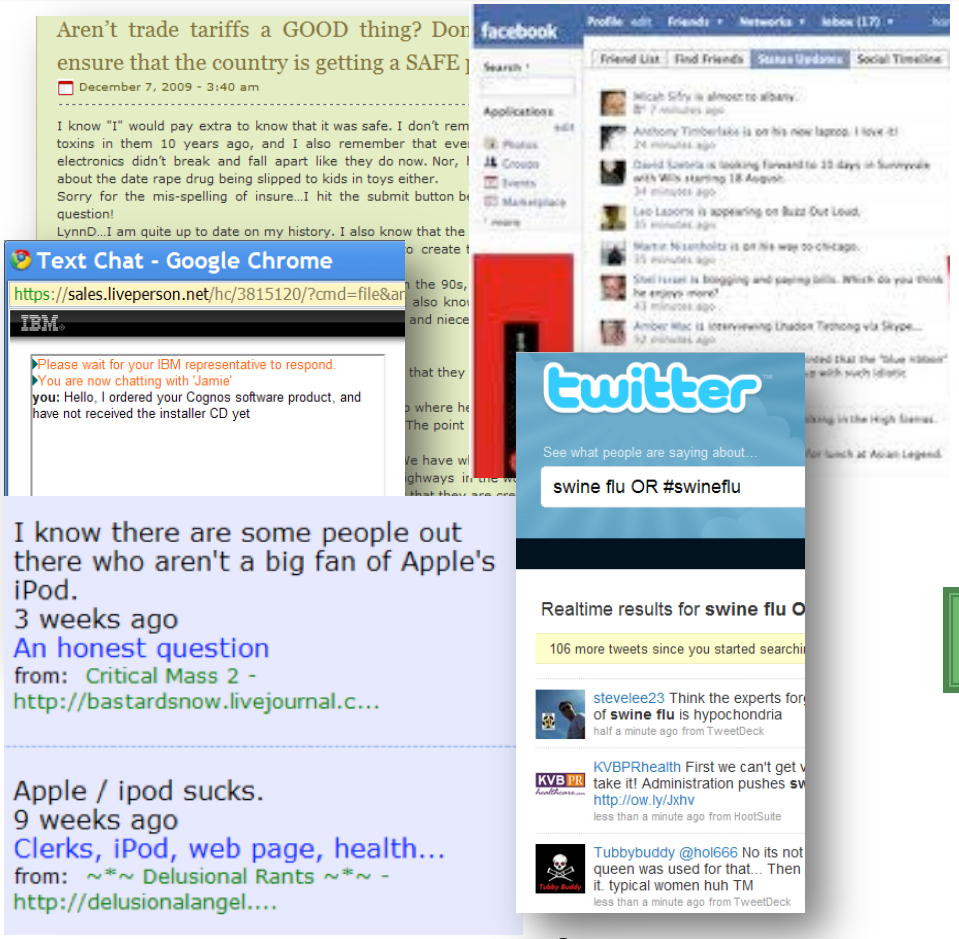

Consumer Generated,
Not Edited,
Not Authenticated

Actionable Intelligence

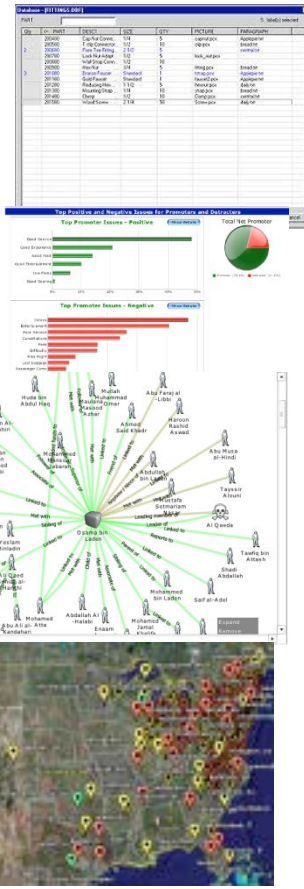

Applications: Reputation management

- Consumer Brand Analytics
  - What are people saying about our brand?
- Marketing Communications
  - Significant spending on marketing, advertising: Companies trying to position their products
  - Brand analytics helps to determine whether such campaigns are effective
- Product reviews
  - Automatically mine product reviews for information on product features, new requests, …
    - Easy to use, Comfortable chair, Light weight, Sturdy, Good price

Applications: Citizen response

- Citizen response
  - solicit citizen feedback on bills debated in Congress
  - What new issues are being raised, what aspects of bill are popular, unpopular
- Political Campaigns
  - Why do people support a candidate?
- Law enforcement
  - Gang members boast about their activities on Facebook
  - Protests being planned through Twitter
  - NYT: Sending the Police Before There's a Crime

    http://www.nytimes.com/2011/08/16/us/16police.html?_r=1

Application: Real-time citizen journalism

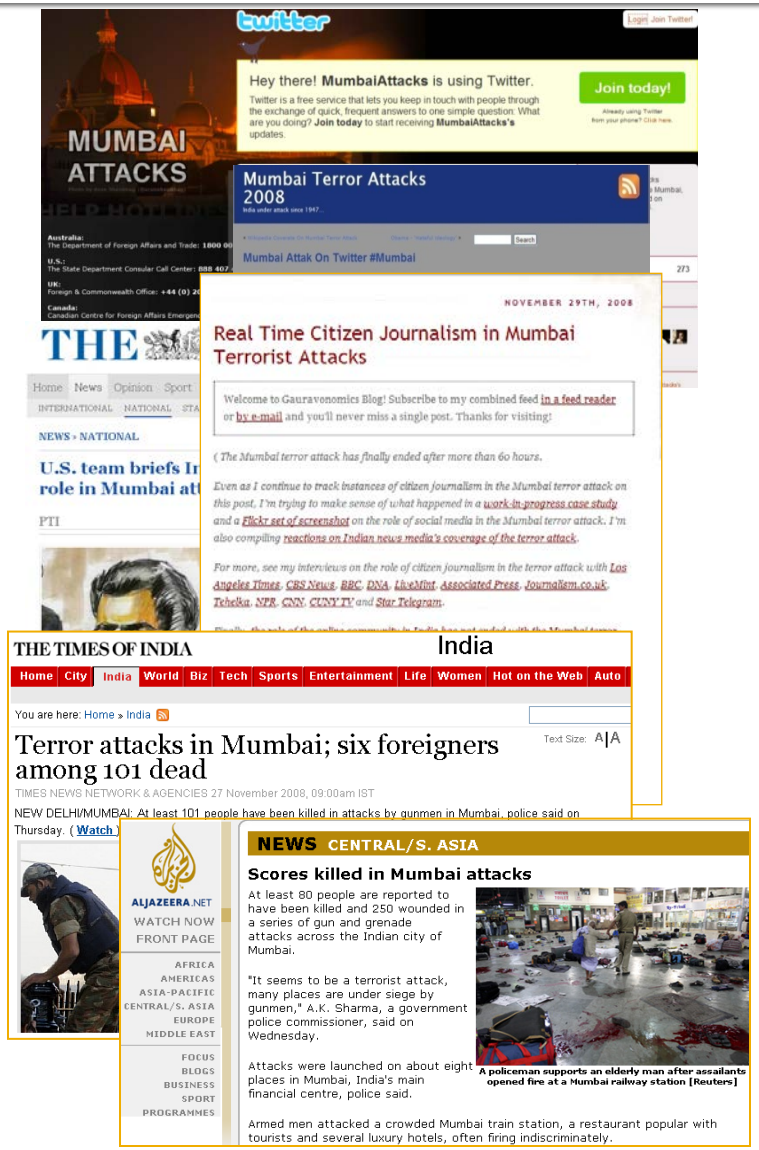

- Citizen journalism provides more valuable information than newswire services
- Challenge:
  - Many redundant posts, users have to wade through hundreds of posts to locate useful information
- Goal:
  - Mine this data in real-time and produce well organized summaries

Application: Social media marketing

- Viral marketing:
  - Personalized recommendations
- Online forum users are brand advocates:
  - 79.2% of forum contributors help a friend to make a decision about a product purchase (47.6% of non-contributors).
  - 65% of forum contributors share advice (offline and in person) based on information that they've read online (35% of non-contributors)
  - http://www.socialmediaexaminer.com/new-studies-show-value-of-social-media

Application: Human behavior analysis

- Process social media content, provide tools for analysts to:
  - Identify social networks: groups, members
  - Identify topics and sentiment

Predictive Modeling

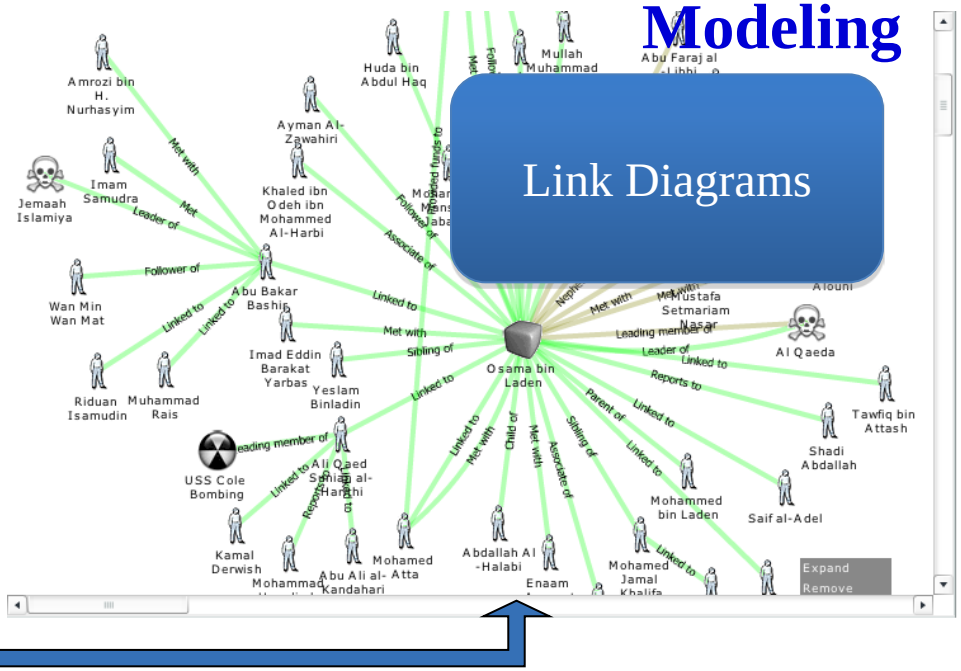

The tutorial: Social Media

- **Goal:** Introduce methods and algorithms for Social Media Analytics
- Tutorial has two parts:
  - **Part 1: Information Flow**
    - How do we capture and model the flow of information through networks to:
      - Predict information attention/popularity
      - Detect information big stories before they happen
  - **Part 2: Rich Interactions**
    - How do we go beyond "link"/"no-link":
      - Predicting future links and their strengths
      - Separating friends from foes

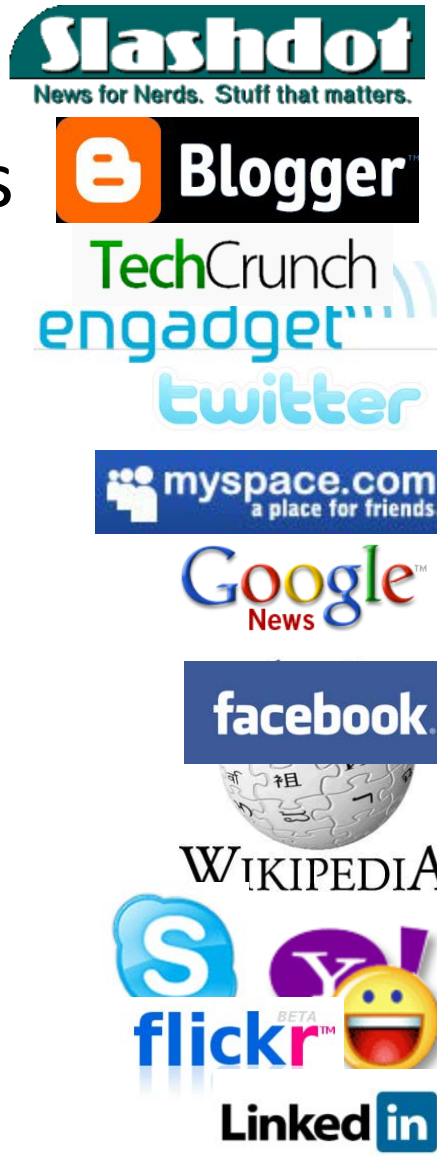

Tutorial Outline

- **Part 1: Information flow in networks**
  - **1.1: Data collection: How to track the flow?**
  - 1.2: Modeling and predicting the flow
  - 1.3: Infer networks of information flow
- Part 2: Rich interactions

Part 1 of the Tutorial: Overview

- Information flow through Social Media
  - Analyzing underlying mechanisms for the real-time spread of information through on-line networks
- Motivating questions:
  - How do messages spread through social networks?
  - How to predict the spread of information?
  - How to identify networks over which the messages spread?

Social Media Data: Spinn3r

- Spinn3r Dataset: http://spinn3r.com
  - 30 million articles/**day** (50GB of data)
    - 20,000 news sources + millions blogs and forums
    - And some Tweets and public Facebook posts
- What are basic "units" of information?
  - Pieces of information that propagate between the nodes (users, media sites, …)
    - phrases, quotes, messages, links, tags

Tracing Information Flow

- Would like to track units of information that:
  - correspond to pieces of information:
    - events, articles, …
  - vary over the order of days,
  - and can be handled at large scale
- Ideas:
  - (1) Cascading links to articles
  - Textual fragments that travel relatively unchanged:
    - (2) URLs and hashtags on Twitter
    - (3) Phrases inside quotes: "…"

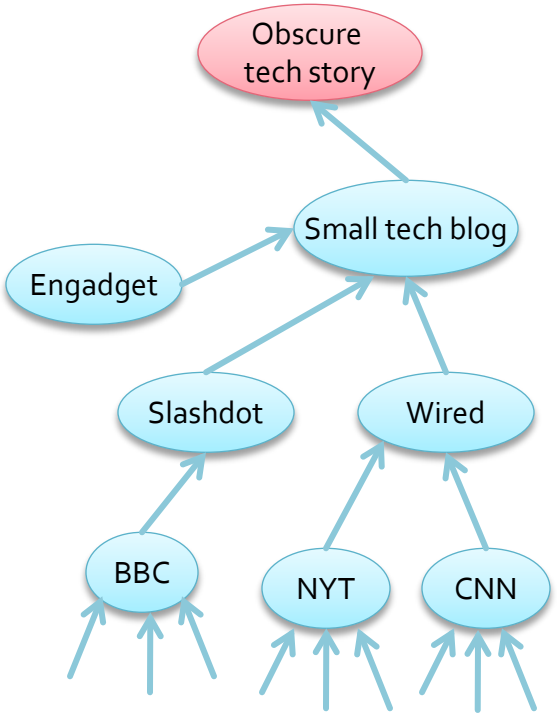

[SDM '07]

Tracing Information (1): Hyperlinks

- Bloggers write posts and refer (link) to other posts and the information propagates

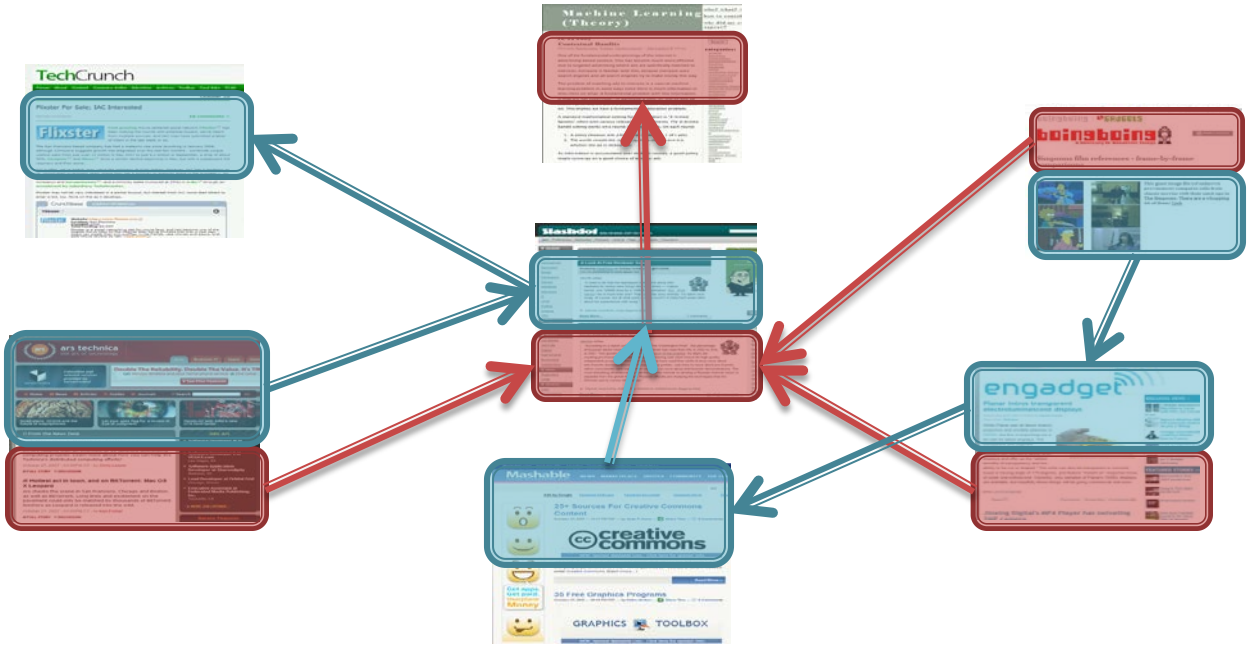

Cascading hyperlinks

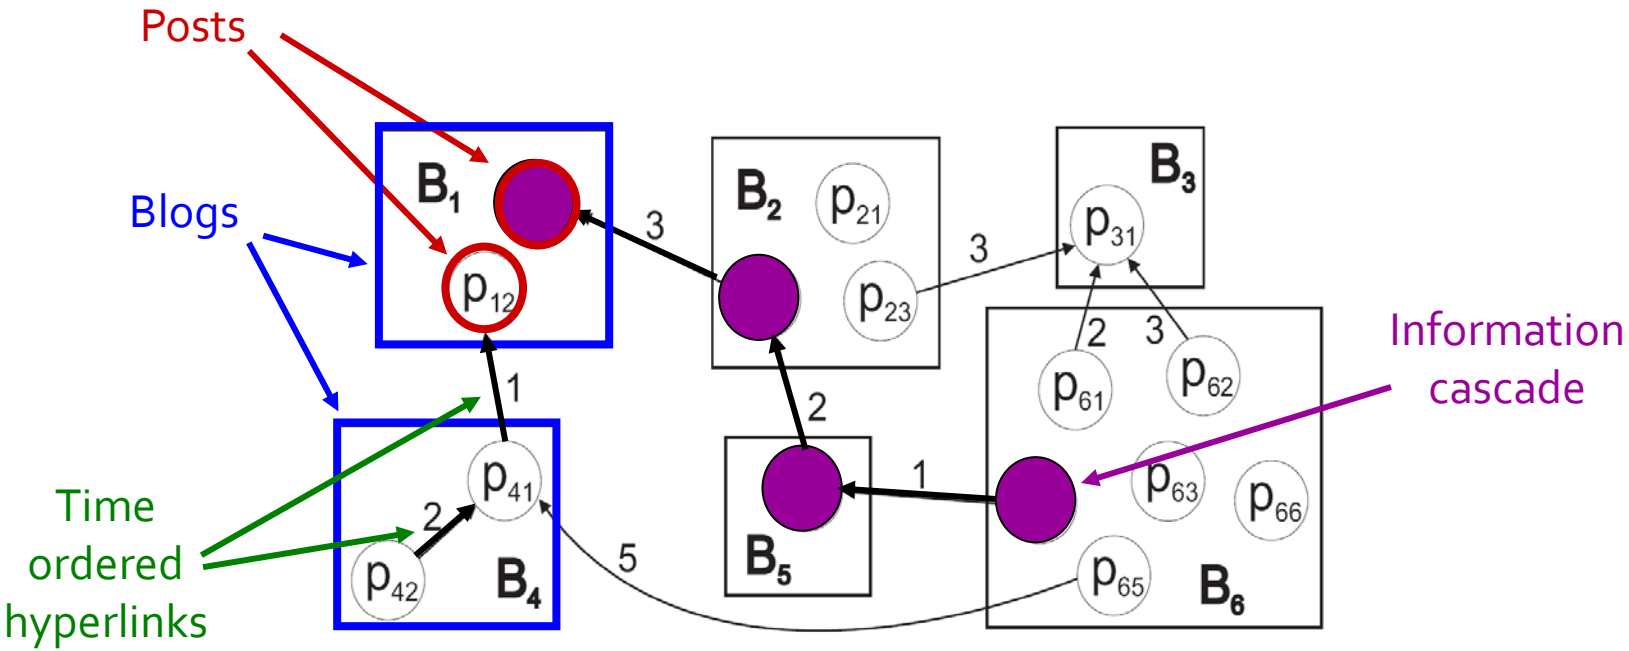

- Identify cascades – graphs induced by a time ordered propagation of information [Adamic-Adar '05] [SDM '07]

[SDM '07]

Cascade Shapes

- Cascade shapes (ordered by decreasing frequency)
  - 10 million posts and 350,000 cascades

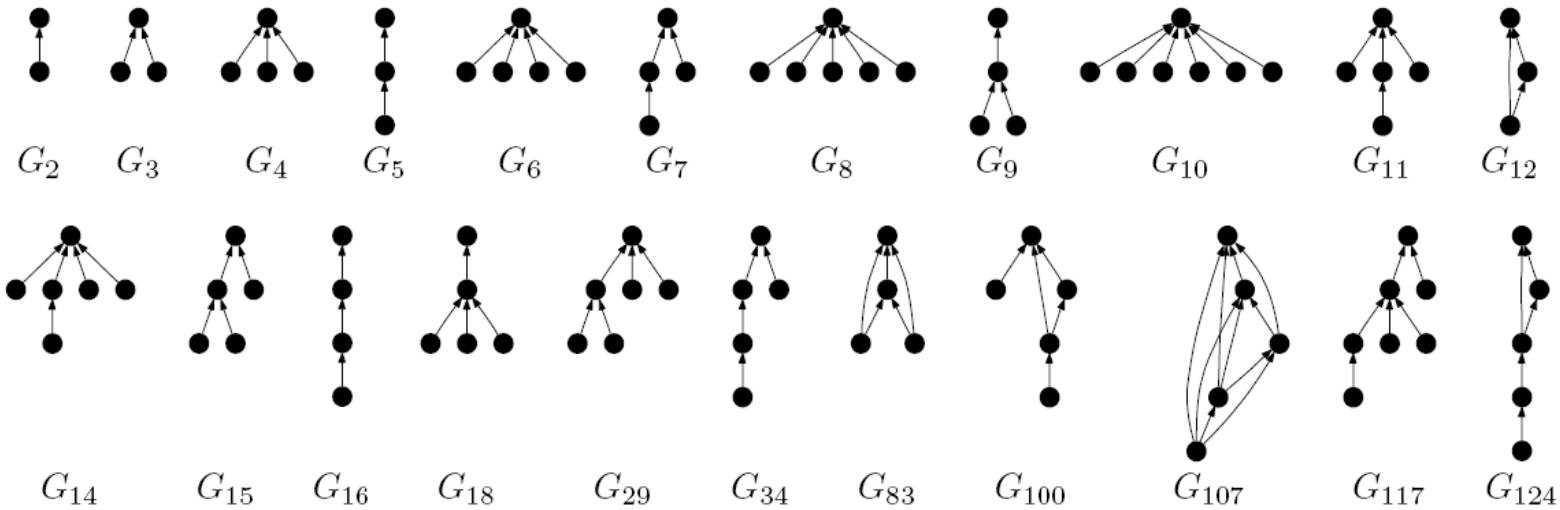

  - Cascades are mainly stars (wide and bushy trees)
  - Interesting relation between the cascade frequency and structure

[ICWSM '11]

Tracing sentiment of cascade

- Methodology:
  - Each node of the cascade is a blogpost that belongs to a blog
  - For each blog compute the baseline sentiment (over all its posts)
    - *Subjectivity*: absolute deviation from the baseline
    - *Positivity*: positive deviation
    - *Negativity*: negative deviation
- Question:
  - Does sentiment flow in cascade?

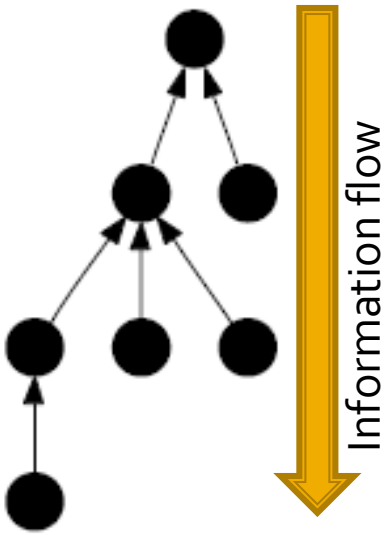

[ICWSM '11]

Tracing sentiment of cascade

- Cascades "heats" up early and then cool off

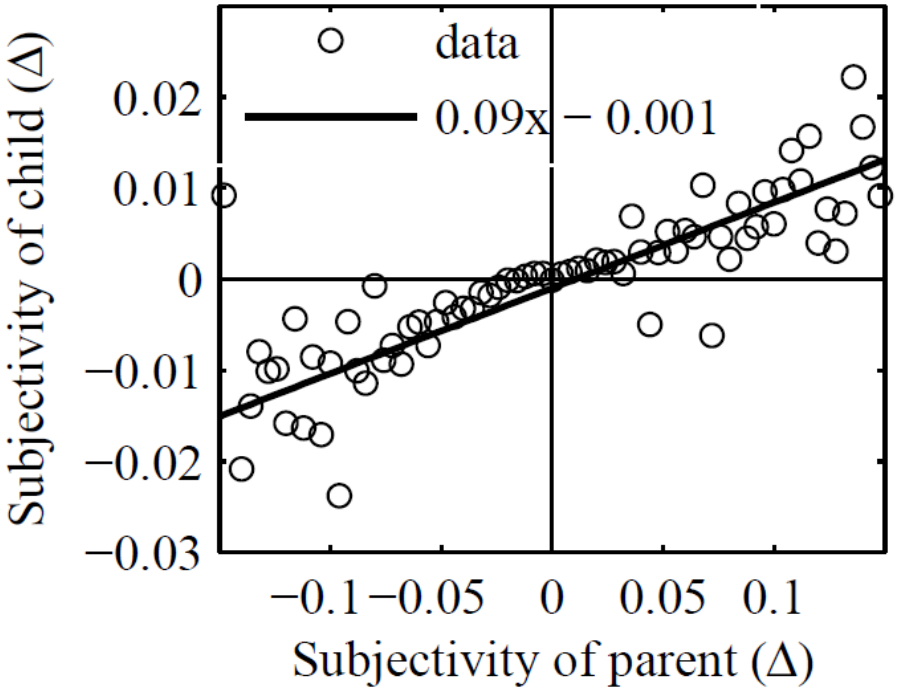

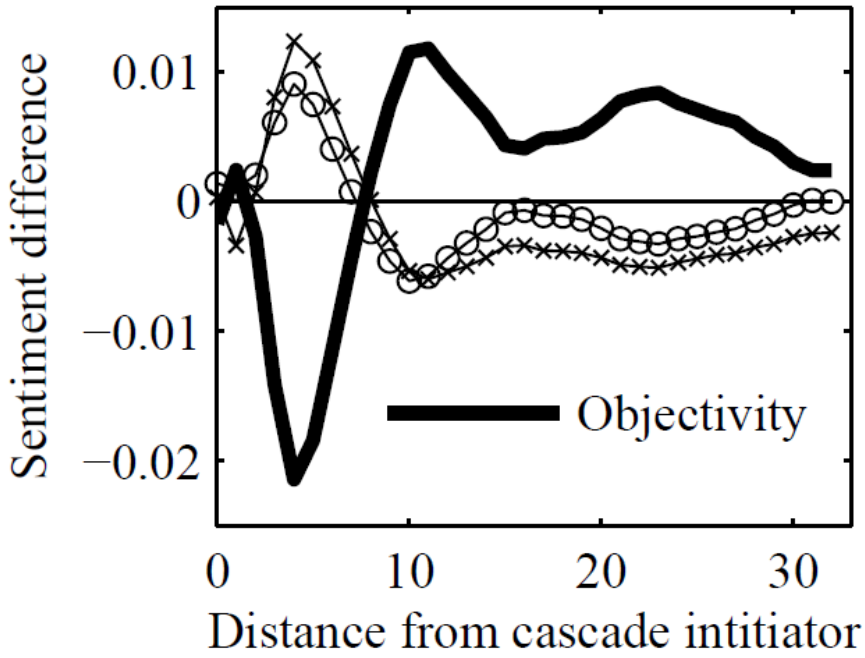

Subjectivity of the child and the parent are correlated. Sentiment flows!

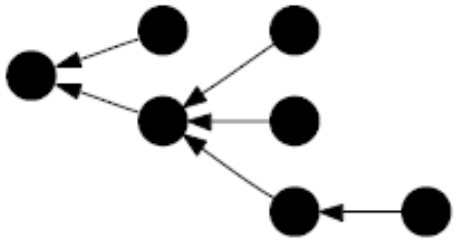

Tracing hyperlinks: Pros/Cons

- Advantages:
  - Unambiguous, precise and explicit way to trace information flow
  - We obtain both the times as well as the trace (graph) of information flow
- Caveats:
  - Not all links transmit information:
    - Navigational links, templates, adds
  - Many links are missing:
    - Mainstream media sites do not create links
    - Bloggers "forget" to link the source
      - (We will later see how to identify networks/cascades just based on what times sites mentioned information)

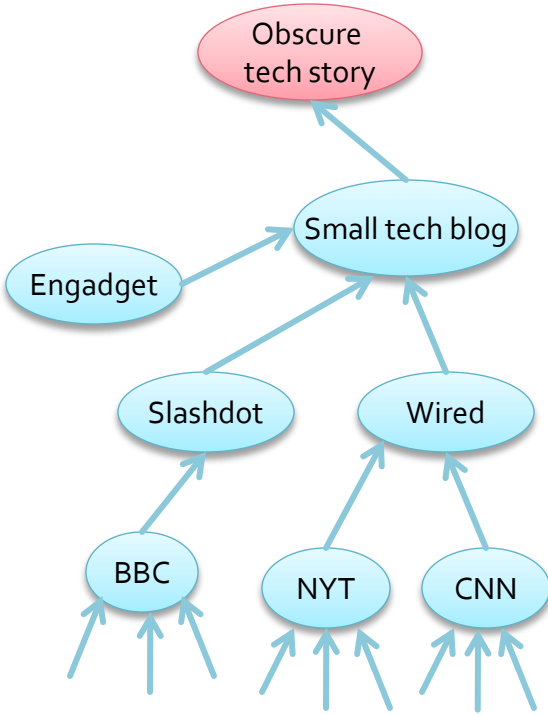

Issue: Cascades & Missing data

- Complete social media data is near impossible to collect [de Choudhury et al., '10]
- Missing data and unobserved nodes bias the results
  - Estimating influence or a red node gives biased result
- Can we correct for such biases?

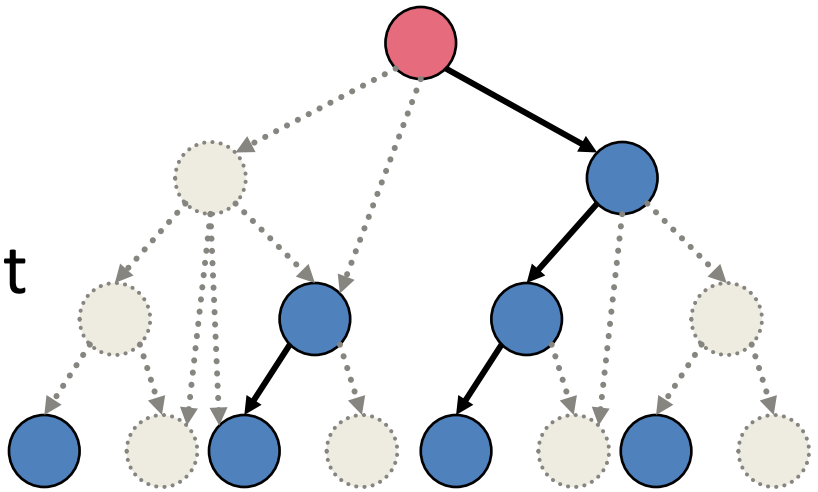

What happens with missing data?

Network

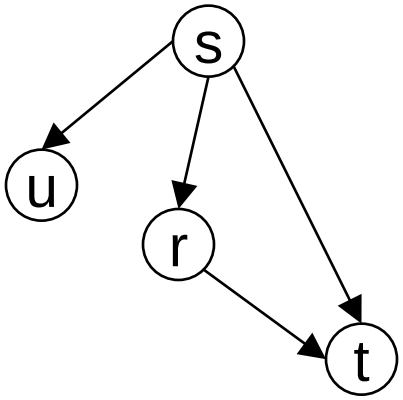

Influence Cascade

(e.g., Twitter re-tweets)

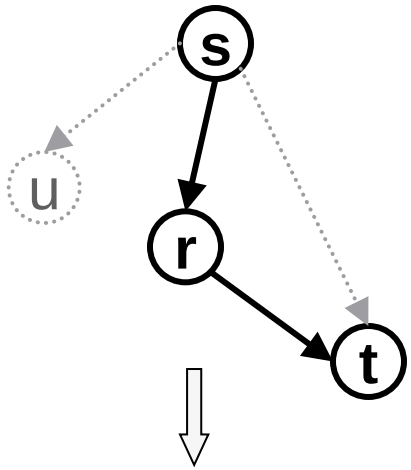

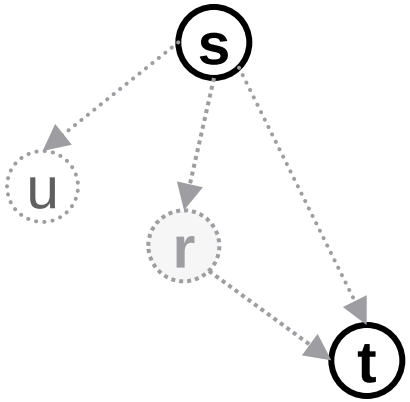

	Cascade size	Cascade depth
Complete data	3	2
Missing data	2	0

Data about node *r* is missing!

Problem Statement

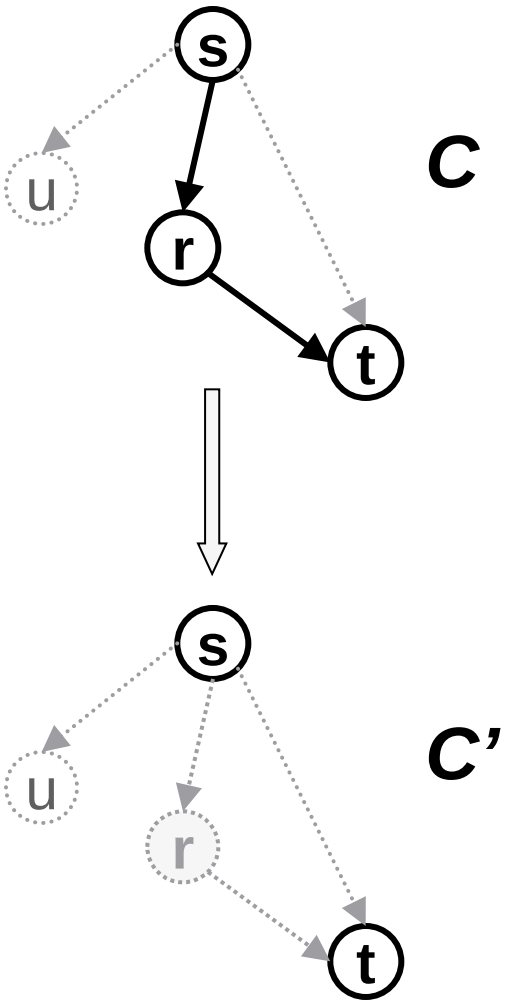

- Goal: Find properties *X* of the complete cascade *C*
- We only have access to cascade *C'* that is *C* with missing data
  - Each node of C is missing with probability p
- Results [WSDM '11]:
  - Our method is most effective when more than 20% of the data is missing
  - Works well even with 90% of the data missing

Tracing Information (2): Twitter

- Twitter information network:
  - Each user generates a stream of tweets
  - Users then subscribe to "follow" the streams of others
- 3 ways to track information flow in Twitter:
  - (1) Trace the spread a "hashtag" over the network
  - (2) Trace the spread of a particular URL
  - (3) Re-tweets

Tracing information on Twitter (1)

- (1) Tracing hashtags:
  - Users annotate tweets with short tags
  - Tags naturally emerge from the community
  - Given the Twitter network and time stamped posts
    - If user A used hashtag #egypt at t_1 and user B follows A and B first used the same hashtag at some later time this means A propagated information to B

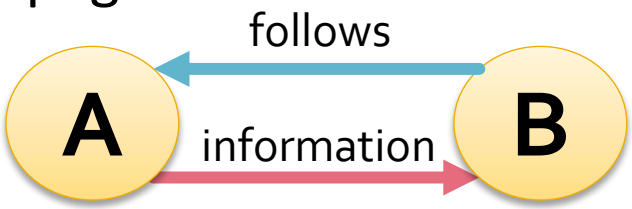

Tracing information on Twitter (2)

- (2) Tracing URLs:
  - Many tweets contain shortened (hashed) URLs
    - Short-URLs are "personalized"
      - If two users shorten the same URL it will shorten to different strings

  - Given the Twitter network and time stamped posts
    - If user A used URL_1 at t_1 and B follows A and B used the same URL later then A propagated information to B

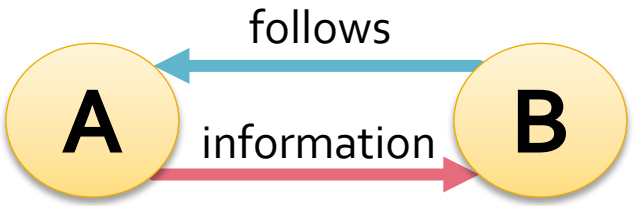

Tracing information on Twitter (3)

- (3) Re-tweets:
  - Explicit information diffusion mechanism on Twitter
  - B sees A's tweet and "forwards" it to its follower by re-tweeting
  - By following re-tweet cascades we establish the information flow

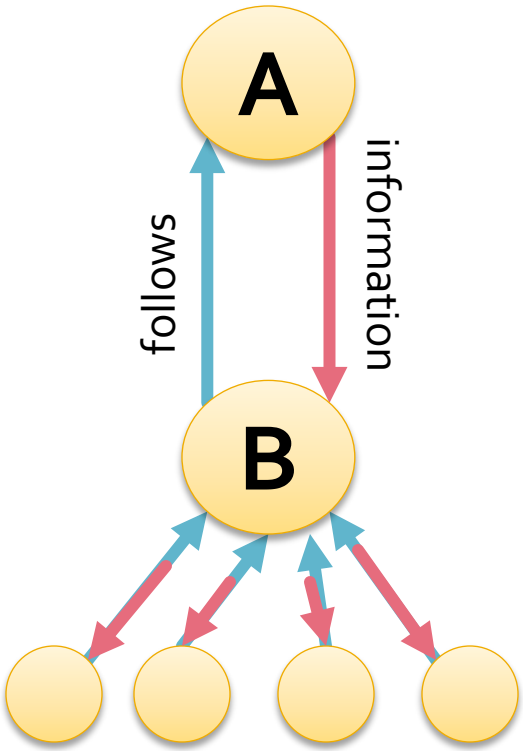



[KDD '09]

Tracing Information (3): Memes

- Meme: A unit of cultural inheritance
- Extract textual fragments that travel relatively unchanged, through many articles:
  - Look for phrases inside quotes: "…"
    - About 1.25 quotes per document in Spinn3r data
  - Why it works?

    Quotes…
    - are integral parts of journalistic practices
    - tend to follow iterations of a story as it evolves
    - are attributed to individuals and have time and location

[KDD '09]

Challenge: Quotes Mutate

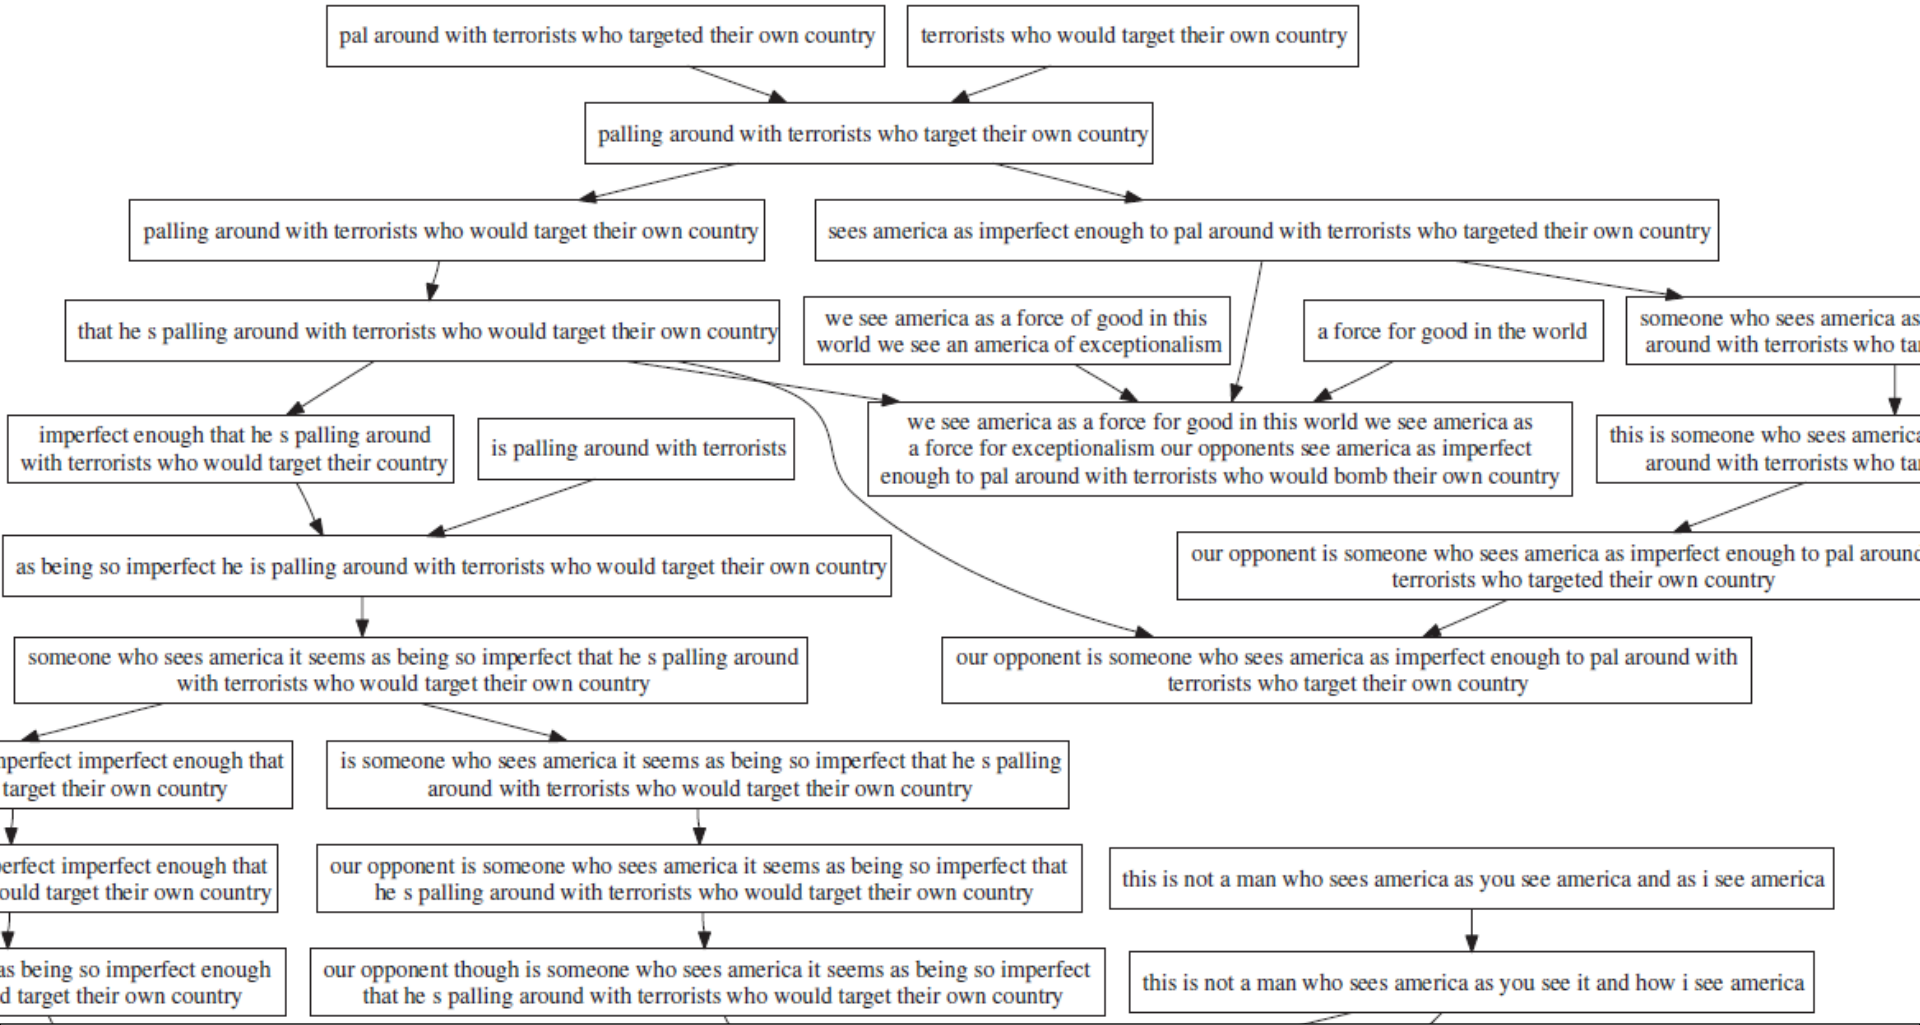

Quote: Our opponent is someone who sees America, it seems, as being so imperfect, imperfect enough that he's palling around with terrorists who would target their own country.

Finding Mutational Variants

- Goal: Find mutational variants of a quote
- Form approximate quote inclusion graph
  - Shorter quote is approximate substring of a longer one
- **Objective:** In DAG (approx. quote inclusion), delete min total edge weight s.t. each connected component has a single "sink"

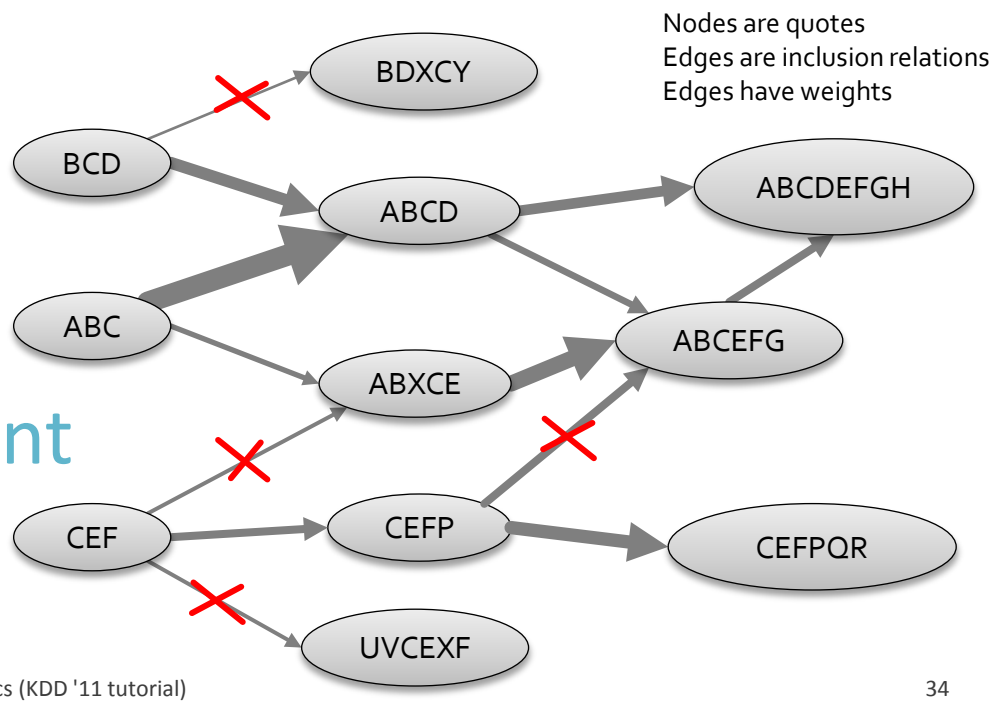

Finding Mutational Variants

- DAG-partitioning is NP-hard but heuristics are effective:
  - **Observation:** enough to know node's parent to reconstruct optimal solution
  - **Heuristic:** Proceed top down and assign a node (keep a single edge) to the strongest cluster

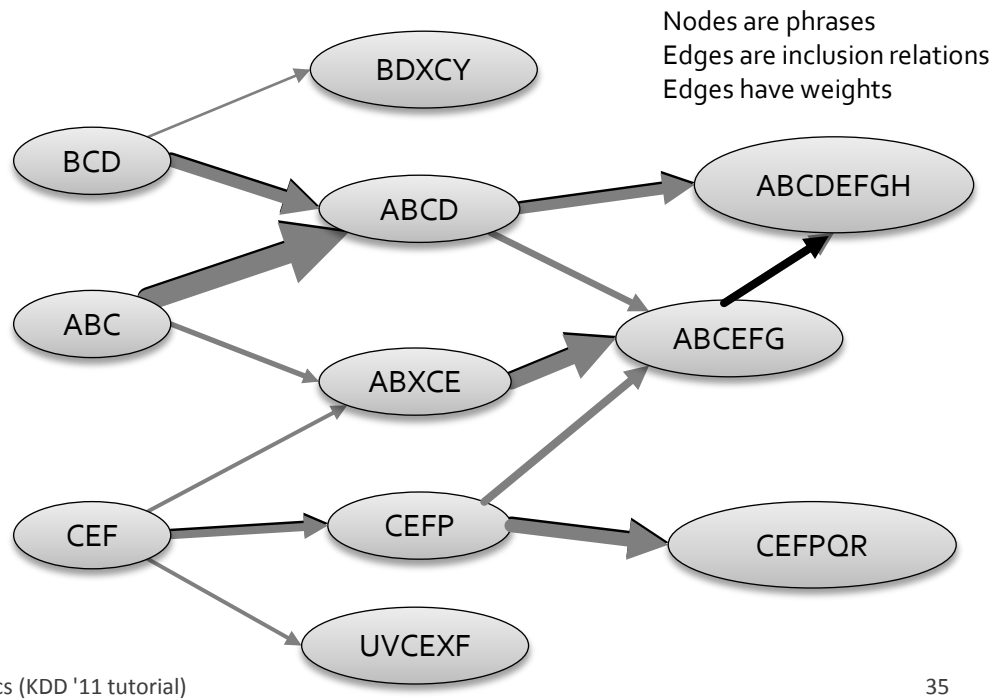

[KDD '09]

Insights: Quotes reveal pulse of media

http://memetracker.org

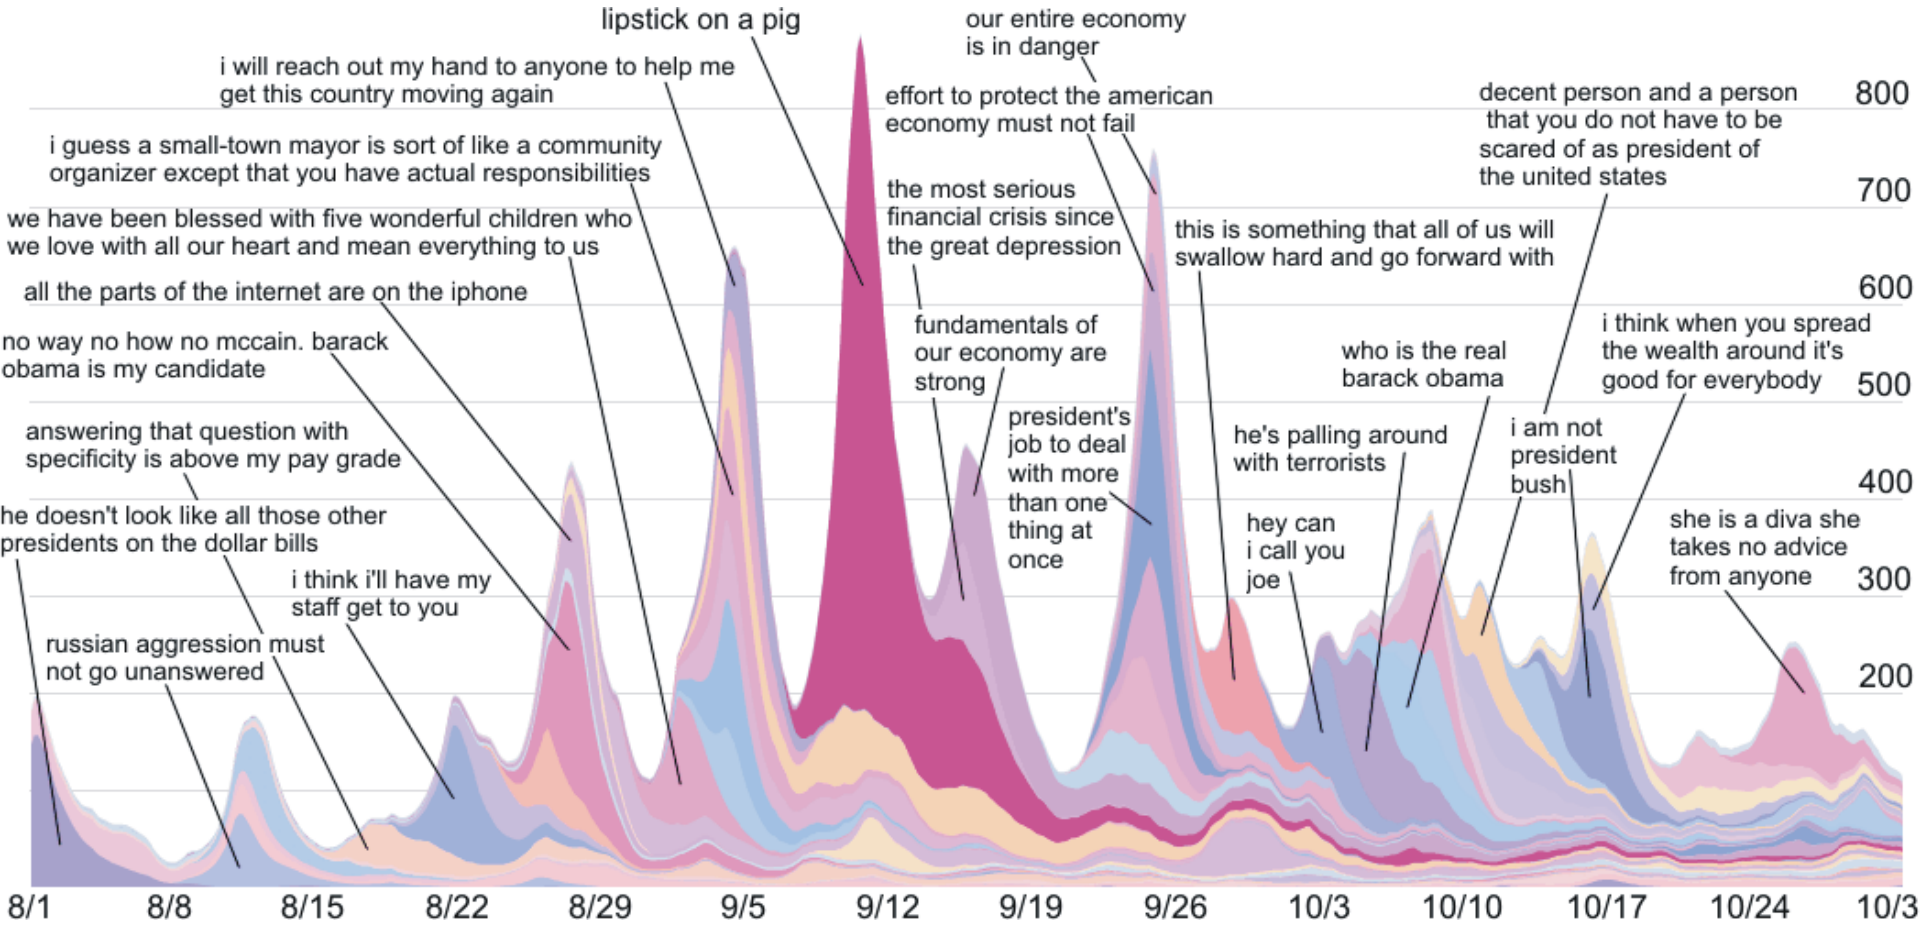

Volume over time of top 50 largest total volume quote clusters

Insights: When sites mention quotes?

- Can classify individual sources by their typical timing relative to the peak aggregate intensity

	Rank	Lag [h]	Reported	Site
Professional blogs	1	-26.5	42	hotair.com
	2	-23	33	talkingpointsmemo.com
	4	-19.5	56	politicalticker.blogs.cnn.com
	5	-18	73	huffingtonpost.com
	6	-17	49	digg.com
	7	-16	89	breitbart.com
	8	-15	31	thepoliticalcarnival.blogspot.com
	9	-15	32	talkleft.com
	10	-14.5	34	dailykos.com
News media	30	-11	32	uk.reuters.com
	34	-11	72	cnn.com
	40	-10.5	78	washingtonpost.com
	48	-10	53	online.wsj.com
	49	-10	54	ap.org

Insights: Quotes on Great depression

- Pew's project for Excellence in journalism
- Media coverage of the current economic crisis
- Main

Phrase			
we will reb			9
how do the			46
in ... our g Depressio			4
they'll have stimulus b			2
...the weig destiny of			3
...to be hor			7
buying stocks is a potentially good deal	Barack Obama	3-Mar	2690
...we would not be able to continue as a going concern...	General Motors	5-Mar	2672
we've seen some progress in the financial markets, absolutely	Ben		2425

Speech in congress

Dept. of Labor release

60-minutes interview

Top republican voice ranks only 14th

Tracing information

- There are many other ways to trace information:
  - Trace email chain letters [Liben-Nowell-Kleinberg, '08]
  - Use text classifiers to predict whether there was information flow between two blog posts [Adar-Adamic, '05]
  - Trace the spread Facebook Page Fans over the Facebook network [Sun et al. '09]
  - Diffusion of "favoriting" a photo on Flickr [Cha et al. '09]
  - Product recommendations [Leskovec et al. '06]

Tutorial Outline

- **Part 1: Information flow in networks**
  - 1.1: Data collection: How to track the flow?
  - **1.2: Modeling and predicting the flow**
  - 1.3: Infer networks of information flow
- Part 2: Rich interactions

[WSDM '11]

Patterns of Information Attention

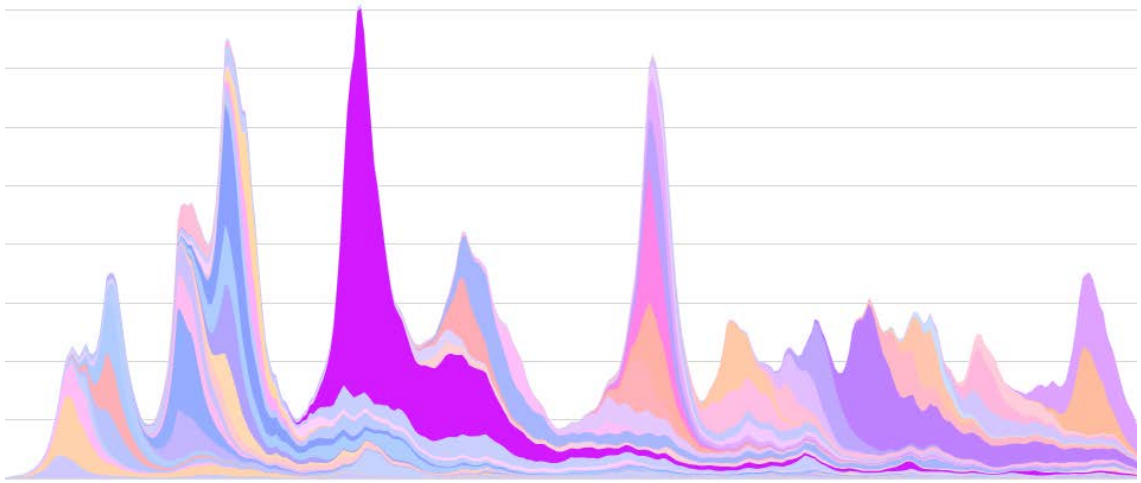

- **Q: How does information attention rise and decay?** [Wu-Huberman '07] [Szabo-Huberman, '08]
  - Item *i*: Piece of information (e.g., quote, url, hashtag)
  - Volume $x_i(t)$: # of times *i* was mentioned at time *t*
    - Volume = number of mentions = attention = popularity
  - Q: What are typical classes of shapes of $x_i(t)$?

Discovering Attention Patterns

- Given: Volume of an item over time
  - i.e., number of mentions of a quote over time
- Goal: Want to discover types of shapes of volume time series

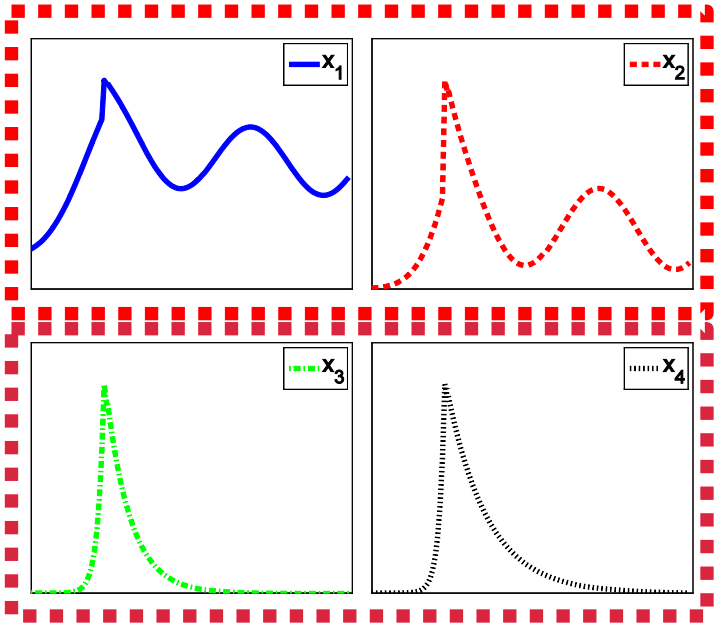

Clustering Temporal Signatures

- Goal: Cluster time series & find cluster centers
- Time series distance function needs to be:

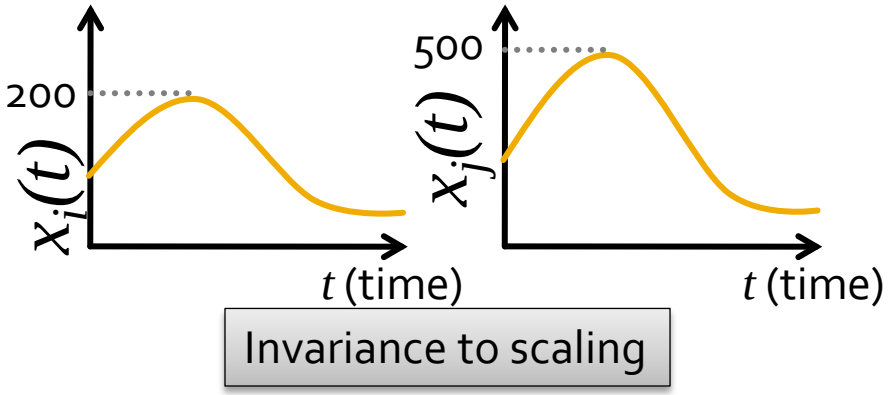

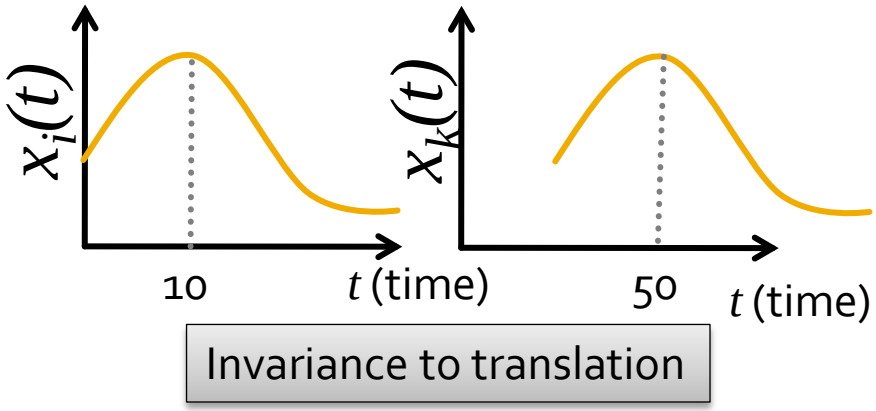

$$d(x,y) = \min_{a,q} \sum_{t} \left(x(t) - a \cdot y(t-q)\right)^2$$

- K-Spectral Centroid clustering [WSDM '11]

Patterns of Attention

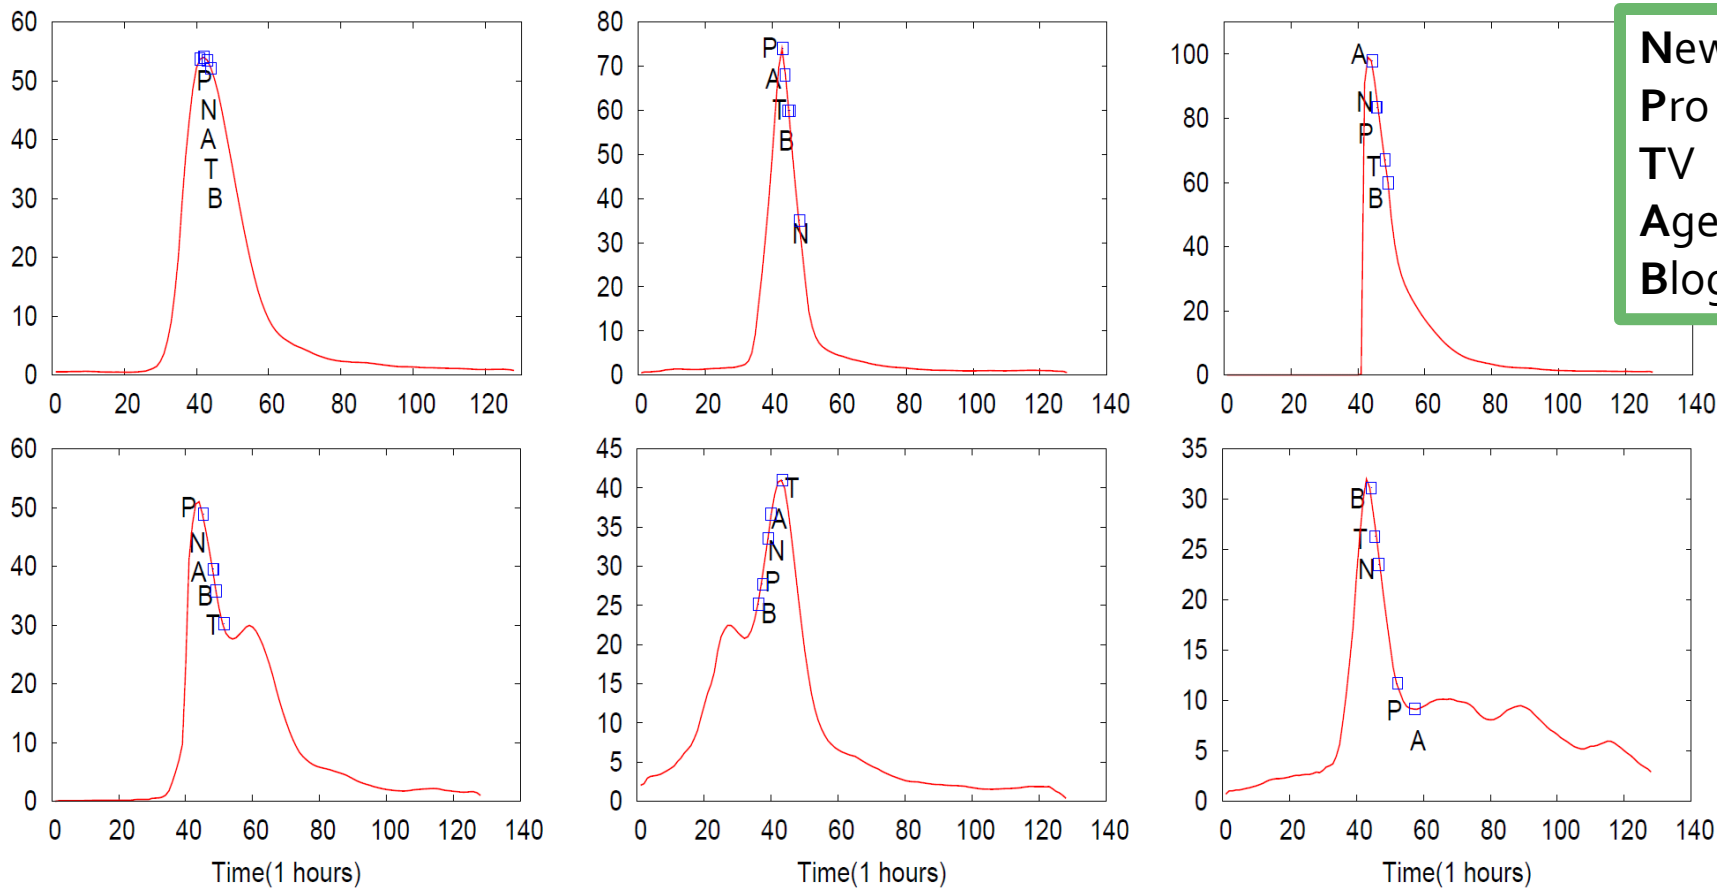

- Quotes: 1 year, 172M docs, 343M quotes
- **Same 6 shapes** for Twitter: 580M tweets, 8M #tags
- Similar shapes also found in query popularity [Kulkarni et al. '11]

Analysis of Attention Patterns

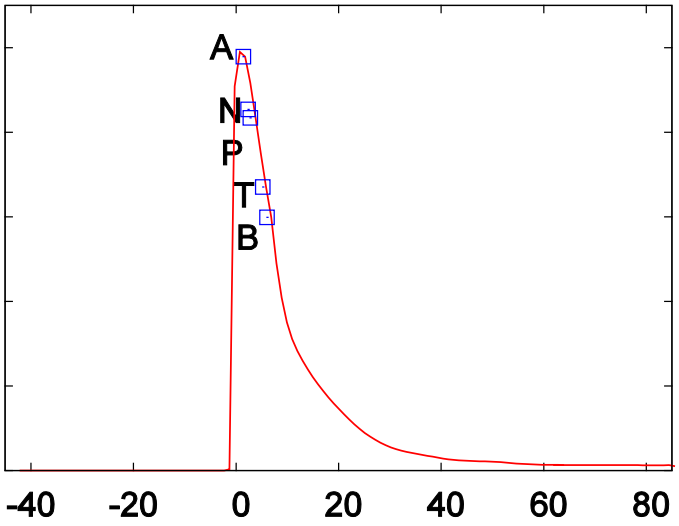

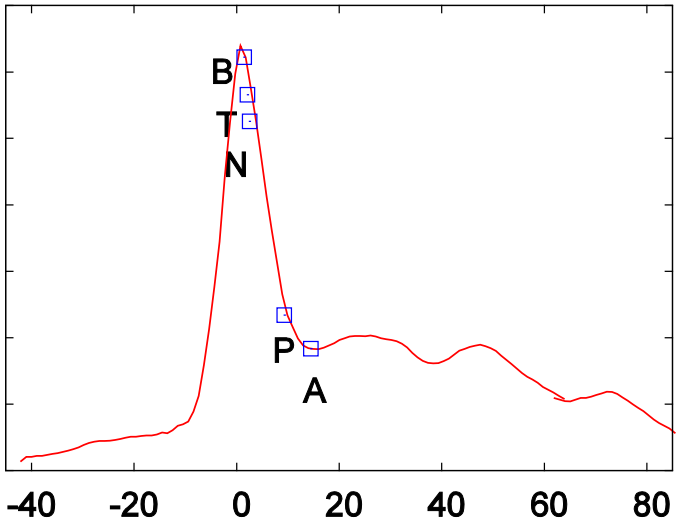

Electric Shock	Die Hard
•Spike created by News **A**gencies (AP, Reuters) •Slow & small response of blogs • Blogs mention 1.3 hours after the mainstream media • Blog volume = 29.1%	• The only cluster that is dominated by **B**loggers both in time and volume • Blogs mention 20 min ***before*** mainstream media • Blog volume = 53.1%

Analysis of Attention Patterns

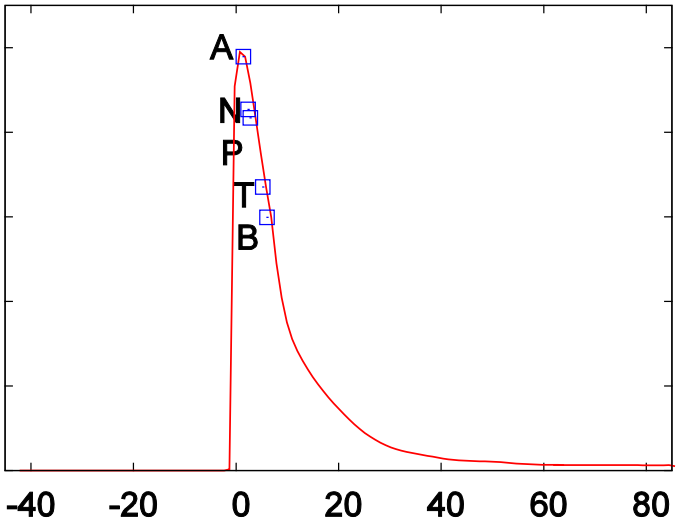

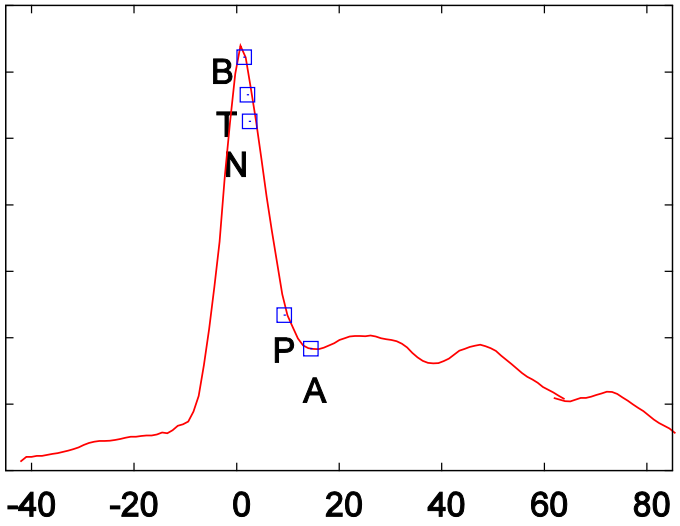

Electric Shock | Die Hard

•Spi
Age
•Slo
• Blo
the
• Blo

Different types of media give raise to characteristic popularity/volume patterns

Predicting Information Attention

- **How much attention will information get?**
  - How many sites mention information at particular time?
- Traditional view:
  - In a network nodes spread information to their neighbors
- Problem:
  - The network may be unknown
- **Idea:** Predict the future number of mentions based on who got "infected" in the past

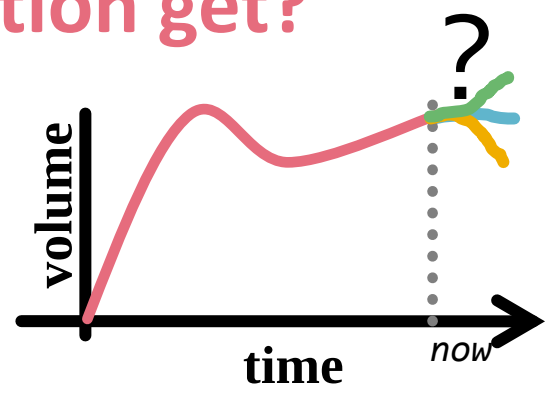

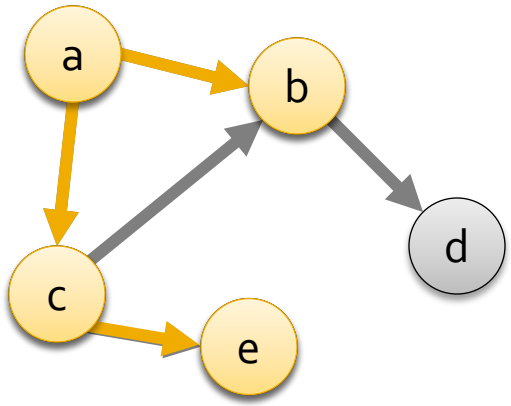

Predicting Information Attention

- **How much attention will information get?**
  - Who reports the information and when?
    - 1h: Gizmodo, Engadget, Wired
    - 2h: Reuters, Associated Press
    - 3h: New York Times, CNN
    - How many sites will mention the info at time 4, 5,…?
- Motivating question:
  - If NYT mentions info at time *t*
  - How many additional mentions does this "generate" (on other sites) at time *t+1*, *t+2*, …?

Linear Influence Model

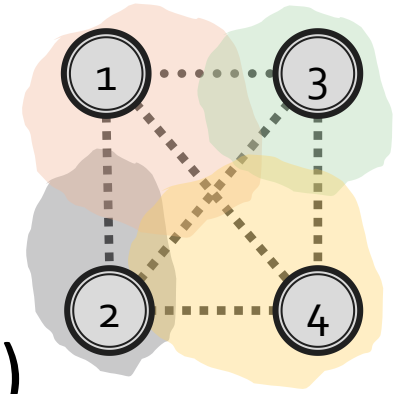

- **Idea:** Predict the volume based on who got infected in the past
- **Solution:** Linear Influence Model (LIM)
  - Assume no network
  - Model the global influence of each node
  - Predict future volume from node influences
- Advantages:
  - No knowledge of network needed
  - Contagion can "jump" between the nodes

LIM: Strategy

t	M(t)	V(t)
1	u, w	2
2	v, x, y	3
3		**?**

- K=1 contagion:
  - $V(t)$…number of new infections at time t
  - $M(t)$…set of newly infected nodes at time t
- How does **LIM** predict the future number of infections $V(t+1)$?
  - Each node *u* has an influence function:
    - After node *u* gets infected, how many other nodes tend to get infected
    - Estimate the influence function from past data
  - Predict future volume using the influence functions of nodes infected in the past

[ICDM '10]

The Linear Influence Model

- Node *u* has an "**influence" function** $I_u(t)$:
  - $I_u(t)$: After node *u* gets mentions, how many other nodes tend to mention *t* hours later
    - e.g.: Influence function of CNN: How many sites say the info after CNN says it?
  - Estimate the influence function from past data

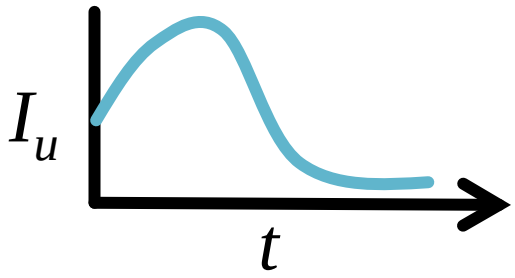

- How to predict future volume $x_i(t+1)$ of info *i* ?
  - Predict future volume using the influence functions of nodes infected in the past

The Linear Influence Model

LIM model:

- Volume $x_i(t)$ of i at time t
- $A_i(t)$ … a set of nodes that mentioned i before time t

- And let:
  - $I_u(t)$: influence function of u
  - t_u: time when u mentioned i
- Predict future volume as a sum of influences: $x_i(t+1) = \sum_{u \in A_i(t)} I_u(t - t_u)$

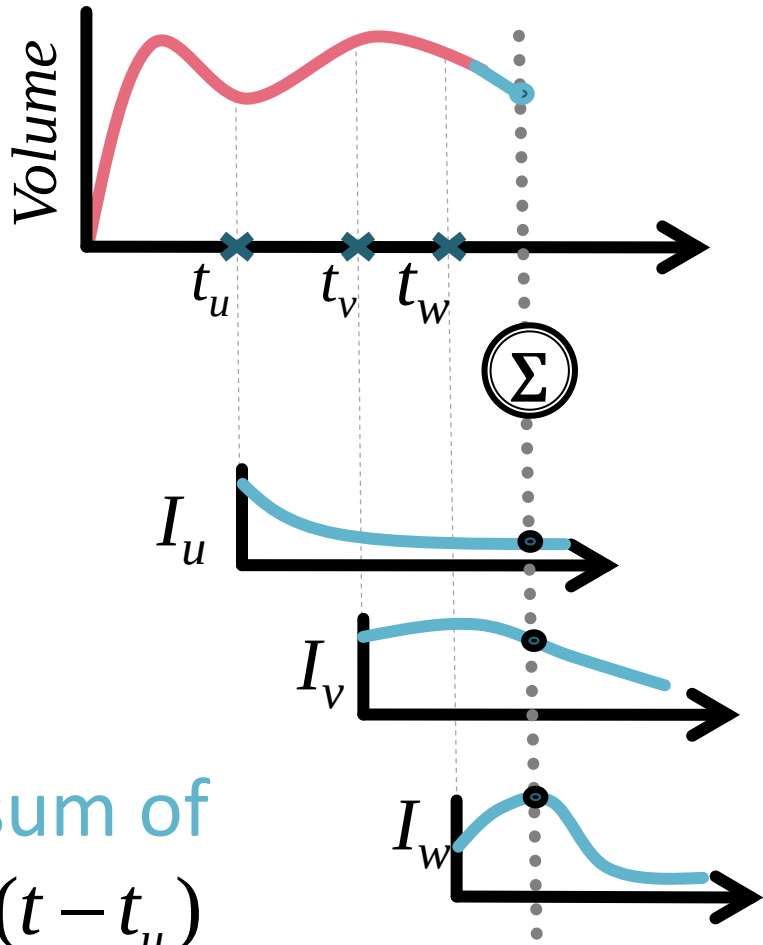

Estimating Influence Functions

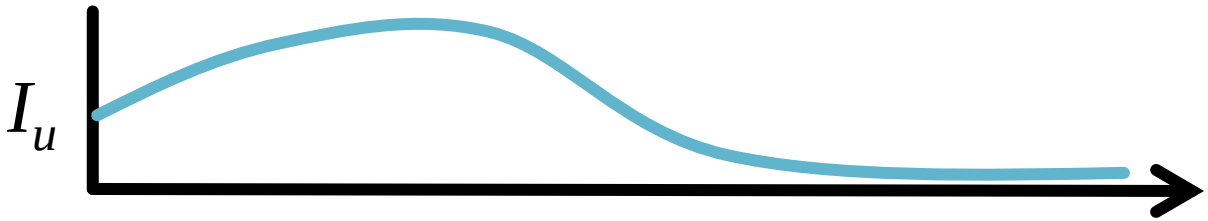

- After node *u* mentions the info, $I_u(t)$ other mentions tend to occur *q* hours later
  - $I_u(t)$ is not observable, need to estimate it
  - We make no assumption about the shape of $I_u(t)$
  - Want to set influence functions $I_u(t)$ such that we minimize the error:

$$\sum_i \sum_t \left[x_i(t+1) - \sum_{u \in A_i(t)} I_u(t - t_u) \right]^2$$

LIM: Influence Functions

- Discrete non-parametric influence functions:
  - Discrete time units
  - $I_u(t)$ … non-negative vector of length L

$$I_u(t) = [I_u(1), I_u(2), I_u(3), \ldots, I_u(L)]$$

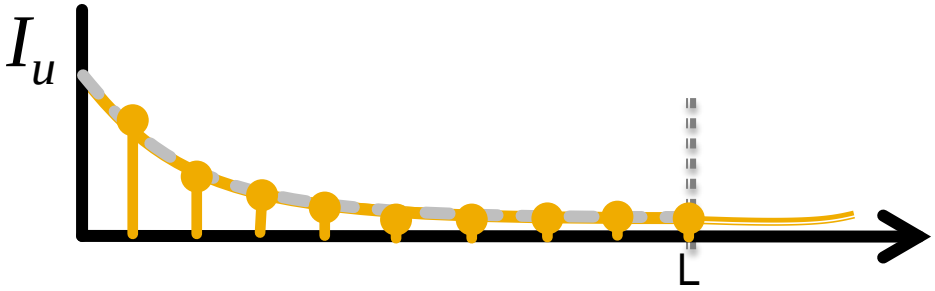

  - Find $I_u(q)$ by solving a least-squares-like problem:

$$\min_{I_u, \forall u} \sum_i \sum_t \left(x_i(t+1) - \sum_{u \in A_i(t)} I_u(t - t_u) \right)^2$$

LIM as matrix equation

- Input data: K contagions, N nodes
- Write **LIM** as a matrix equation:

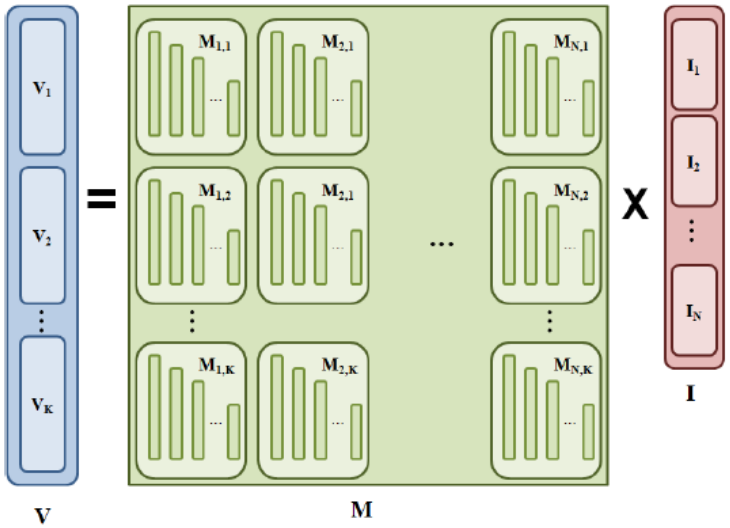

- Volume vector:

  $V_k(t)$ … volume of contagion *k* at time *t*
- Infection indicator matrix:

  $M_{u,k}(t) = 1$ if node *u* gets infected by contagion *k* at time *t*
- Influence functions:

  $I_u(t)$ … influence of node *u* on diffusion

[ICDM '10]

Estimating influence functions

- **LIM** as a matrix equation: V = M * I
- Estimate influence functions:

$$\hat{\mathbf{I}} = \arg\min_{\mathbf{I} \geq 0} ||\mathbf{V} - \mathbf{M} \cdot \mathbf{I}||_2^2$$

  - Solve using Non-Negative Least Squares
    - Well known, can use Reflective Newton Method
    - Time ~1 sec when *M* is 200,000 x 4,000 matrix
- Predicting future volume: **Simple!**
  - Given M and I, then
  - V = M* I

LIM: Performance

- Take top 1,000 quotes by the total volume:
  - Total 372,000 mentions on 16,000 websites
- Build LIM on 100 highest-volume websites
  - $x_i(t)$ … number of mentions across 16,000 websites
  - $A_i(t)$ … which of 100 sites mentioned quote *i* and when
- Improvement in L2-norm over 1-time lag predictor





	Bursty phrases	Steady phrases	Overall
AR	7.21%	8.30%	7.41%
ARMA	6.85%	8.71%	7.75%
LIM (N=100)	**20.06%**	**6.24%**	**14.31%**

[ICDM '10]

Analysis of Influence Functions

- Influence functions give insights:
  - **Q:** NYT writes a post on politics, how many people tend to mention it next day?
  - **A:** Influence function of NYT for political phrases!
- Experimental setup:
  - 5 media types:
    - Newspapers, Pro Blogs, TVs, News agencies, Blogs
  - 6 topics:
    - Politics, nation, entertainment, business, technology, sports
  - For all phrases in the topic, estimate average influence function by media type

[ICDM '10]

Analysis of Influence

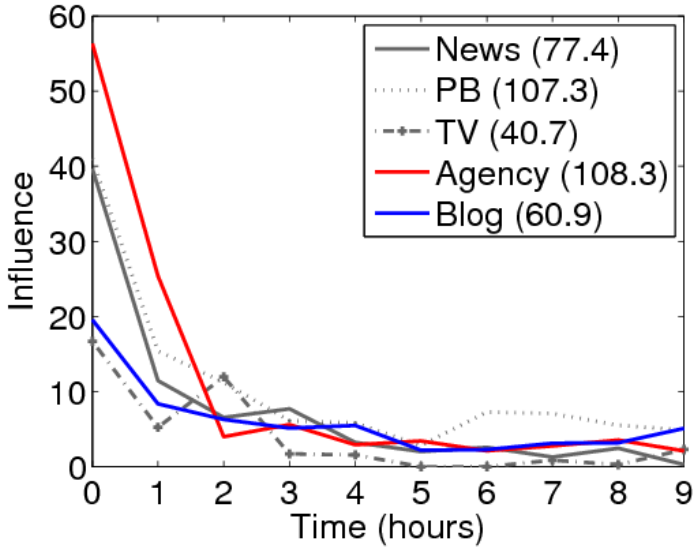

Politics

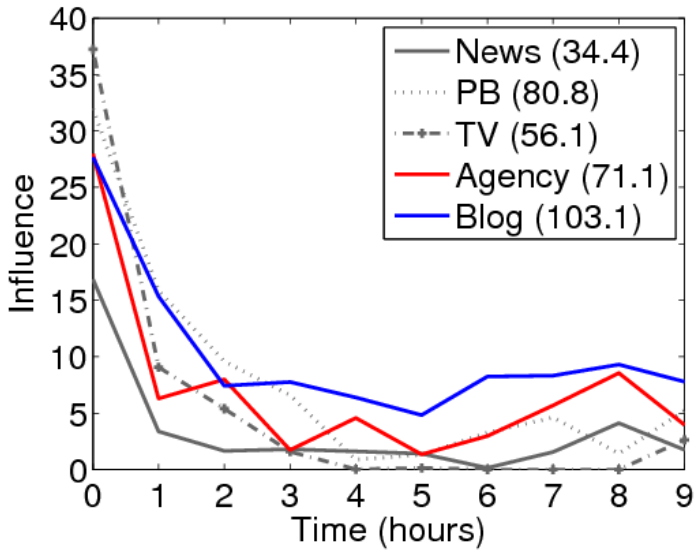

Entertainment

News Agencies, Personal Blogs (Blog), Newspapers, Professional Blogs, TV

- Politics is dominated by traditional media
- Blogs:
  - Influential for Entertainment phrases
  - Influence lasts longer than for other media types

Tutorial Outline

- **Part 1: Information flow in networks**
  - 1.1: Data collection: How to track the flow?
  - 1.2: Modeling and predicting the flow
  - **1.3: Infer networks of information flow**
- Part 2: Rich interactions

Inferring the Diffusion Network

- But how does information **really** spread?

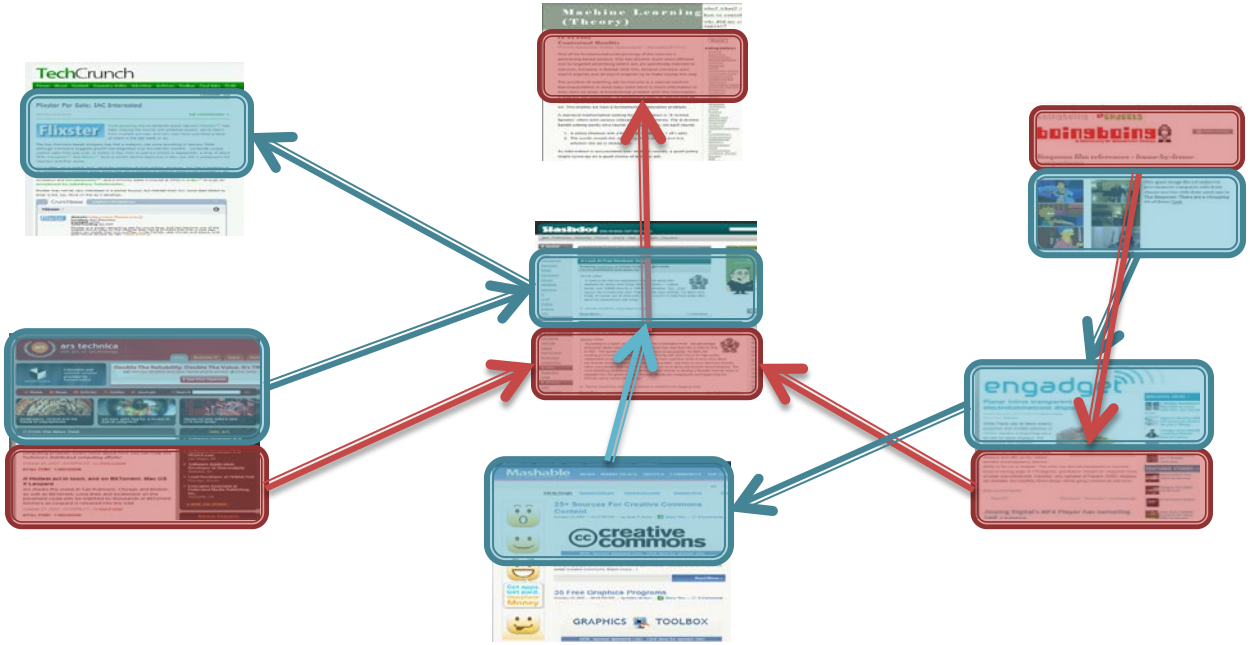

- We only see time of mention but not the edges
- Can we reconstruct (hidden) **diffusion network**?

Inferring the Diffusion Networks

- There is a hidden diffusion network:

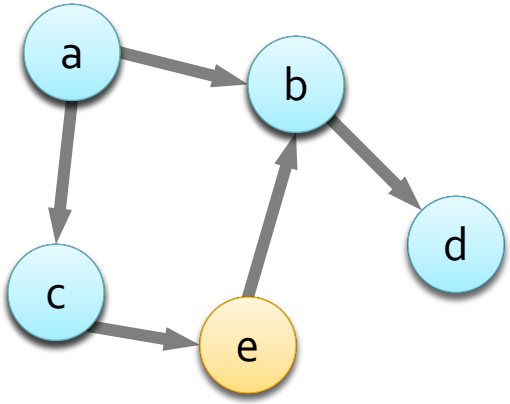

- We only see times when nodes get "infected":
  - c_1: (a,1), (c,2), (b,3), (e,4)
  - c_2: (c,1), (a,4), (b,5), (d,6)
- **Want to infer who-infects-whom network!**

[KDD '10, NIPS '10]

Examples and Applications

	Virus propagation	Word of mouth & Viral marketing
Process	Viruses propagate through the network	Recommendations and influence propagate
We observe	We only observe when people get sick	We only observe when people buy products
It's hidden	But NOT who **infected** whom	But NOT who **influenced** whom

Can we infer the underlying network?

The optimization problem

- **Goal:** Find a graph G that best explains the observed information times:
  - Given a graph G, define the likelihood **P(C|G)**:
    - Define a model of information diffusion over a graph
    - $P_c(u,v)$ … prob. that u infects v in cascade c
    - P(c|T) … prob. that c spread in particular pattern T
    - P(c|G) … prob. that cascade c occurred in G
    - P(G|C) … prob. that a set of cascades C occurred in G
- Questions:
  - How to efficiently compute P(G|C)? (given a single G)
  - How to efficiently find G^* that maximizes P(G|C)? (over $O(2^{N*N})$ graphs)

Information Diffusion Model

- Consider 1 cascade: the model
  - Cascade reaches node *i* at time t_i, and spreads to *i*'s neighbors *j*:

    With prob. β cascade propagates along edge *(u,v)* and $t_v = t_u + \Delta$

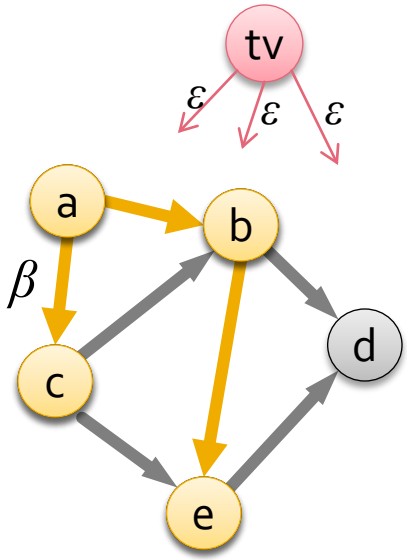

- Transmission probability:

  $$P_c(u,v) \propto P(t_v - t_u) \text{ if } t_v > t_u \text{ else } \varepsilon$$

  $$e.g.: P_c(u,v) \propto e^{-\Delta t}$$

  - ε captures influence external to the network
    - At any time a node can get infected from outside with small probability ε

Information Diffusion Model

- Given node infection times and pattern T:
  - $c = \{ (a,1), (c,2), (b,3), (e,4) \}$
  - $T = \{ a \rightarrow b, a \rightarrow c, b \rightarrow e \}$

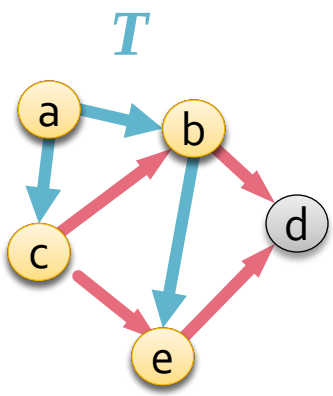

Graph G

- Prob. that c propagates in pattern T

$$P(c|T) = \prod_{(u,v)\in E_T} \beta P_c(u,v) \prod_{u\in V_T,(u,x)\in E\setminus E_T} (1-\beta)$$

Edges that "propagated"

Edges that failed to "propagate"

- Approximate it as: $P(c|T) \approx \prod_{(u,v)\in E_T} P_c(v,u)$

Complication: Too many trees

- How likely is c to spread in graph G?
  - $c = \{(a,1), (c,2), (b,3), (e,4)\}$

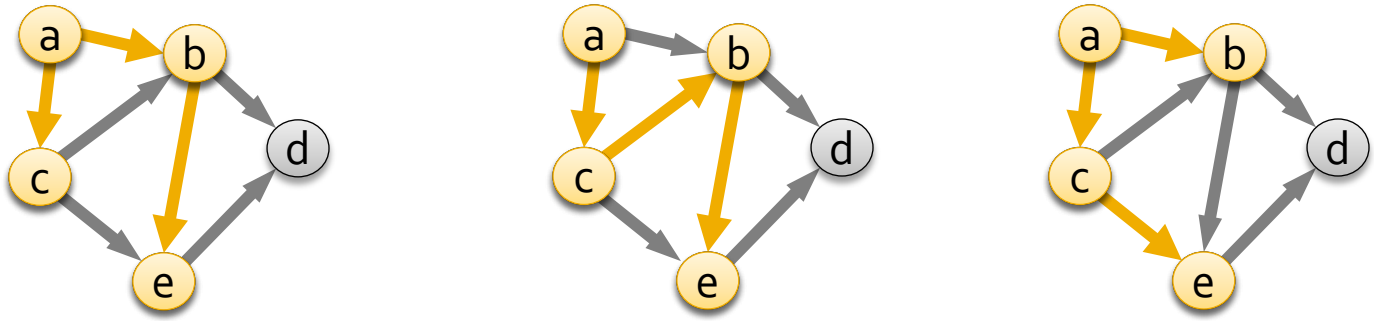

- Need to consider all possible ways for c to spread in G (*i.e.*, all spanning trees T):

$$P(c|G) = \sum_{T \in \mathcal{T}_c(G)} P(c|T) \approx \max_{T \in \mathcal{T}_c(G)} P(c|T)$$

Consider the most likely propagation tree

Optimization problem

- Score of a graph G for a set of cascades C:

$$P(C|G) = \prod_{c} P(c|G)$$

$$F_C(G) = \sum_{c \in C} \log P(c|G)$$

- Want to find the "best" graph:

$$G^* = \underset{|G| \leq k}{\operatorname{argmax}} F_C(G)$$

The problem is NP-hard:
MAX-k-COVER [KDD '10]

NetInf: Submodularity

- Theorem: Function $F_C(G)$ is monotonic, and submodular in edges of G:
  - Let A, B be two graphs: same nodes, different edges: $\boldsymbol{A \subseteq B \subseteq \mathrm{V}\mathrm{x}\mathrm{V}}$:

$$\underbrace{F_C(A \cup \{e\}) - F_C(A)}_{\text{Gain of adding an edge to a "small" graph}} \geq \underbrace{F_C(B \cup \{e\}) - F_C(B)}_{\text{Gain of adding an edge to a "large" graph}}$$

- Benefits:
  - 1. Efficient (and simple) optimization algorithm
  - 2. Approximation guarantee (≈ 0.63 of OPT)
  - 3. Tight on-line bounds on the solution quality

NetInf: The Algorithm

- NetInf algorithm:
  Use greedy hill-climbing to maximize $F_C(G)$:
  - Start with empty G_0 (G with no edges)
  - Add k edges (k is parameter)
  - At every step add an edge to G_i that maximizes the marginal improvement

$$e_i = \underset{e \in G \setminus G_{i-1}}{\operatorname{argmax}} \; F_C(G_{i-1} \cup \{e\}) - F_C(G_{i-1})$$

Experiments: Synthetic data

- Synthetic data:
  - Take a graph G on *k* edges
  - Simulate info. diffusion
  - Record node infection times
  - Reconstruct G
- Evaluation:
  - How many edges of G can NetInf find?
    - Break-even point: 0.95
    - Performance is independent of the structure of G!

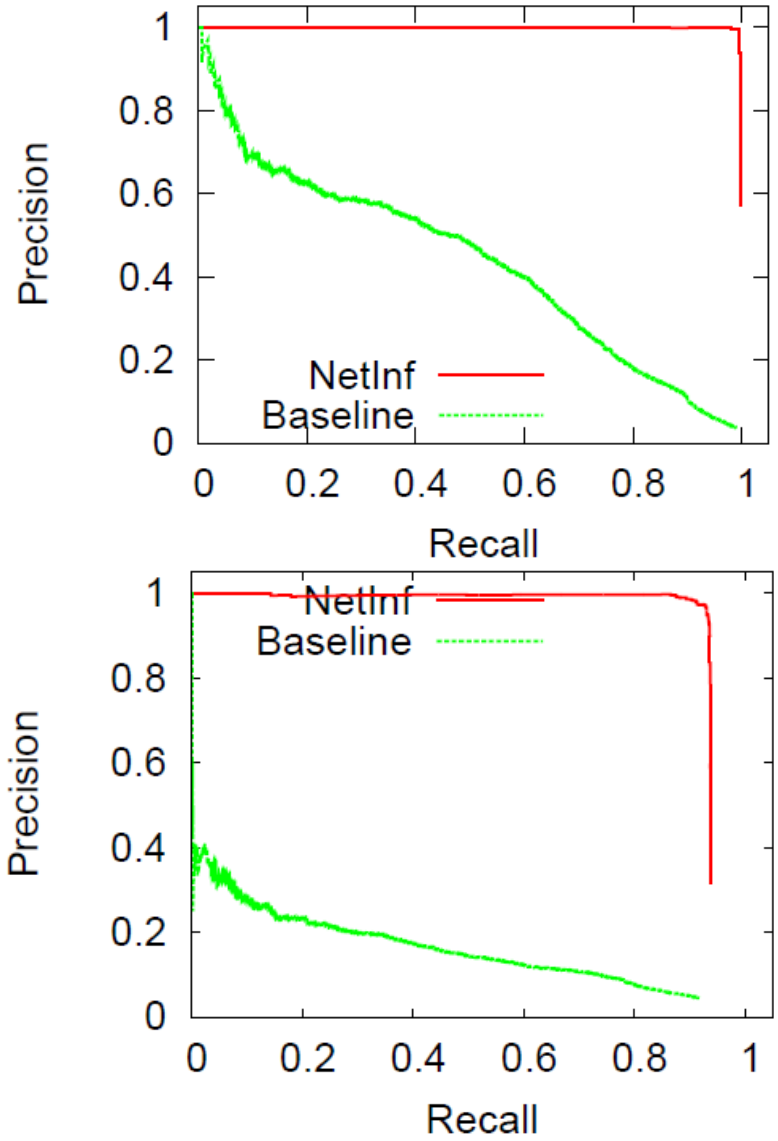

Example: Real Data

- Memetracker quotes:
  - 172 million news and blog articles
  - Aug '08 – Sept '09
  - Extract 343 million phrases
  - Record times $t_i(w)$ when site w mentions quote i
- Given times when sites mention quotes
- Infer the network of information diffusion:
  - Who tends to copy (repeat after) whom

Example: Diffusion Network

- 5,000 news sites:

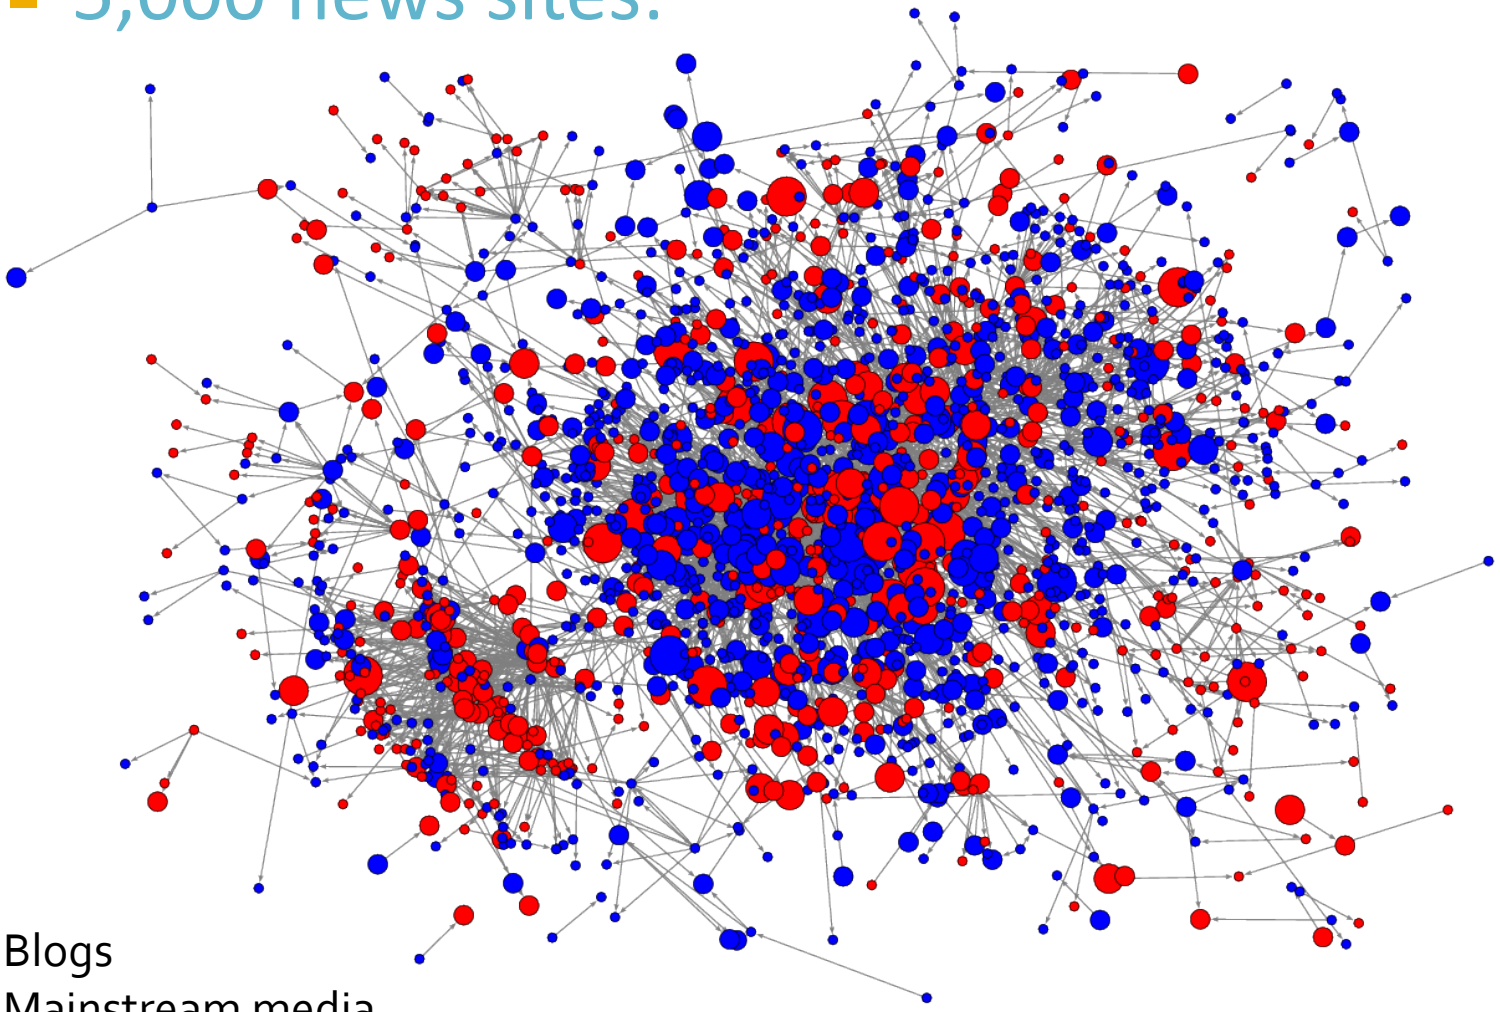

Diffusion Network (small part)

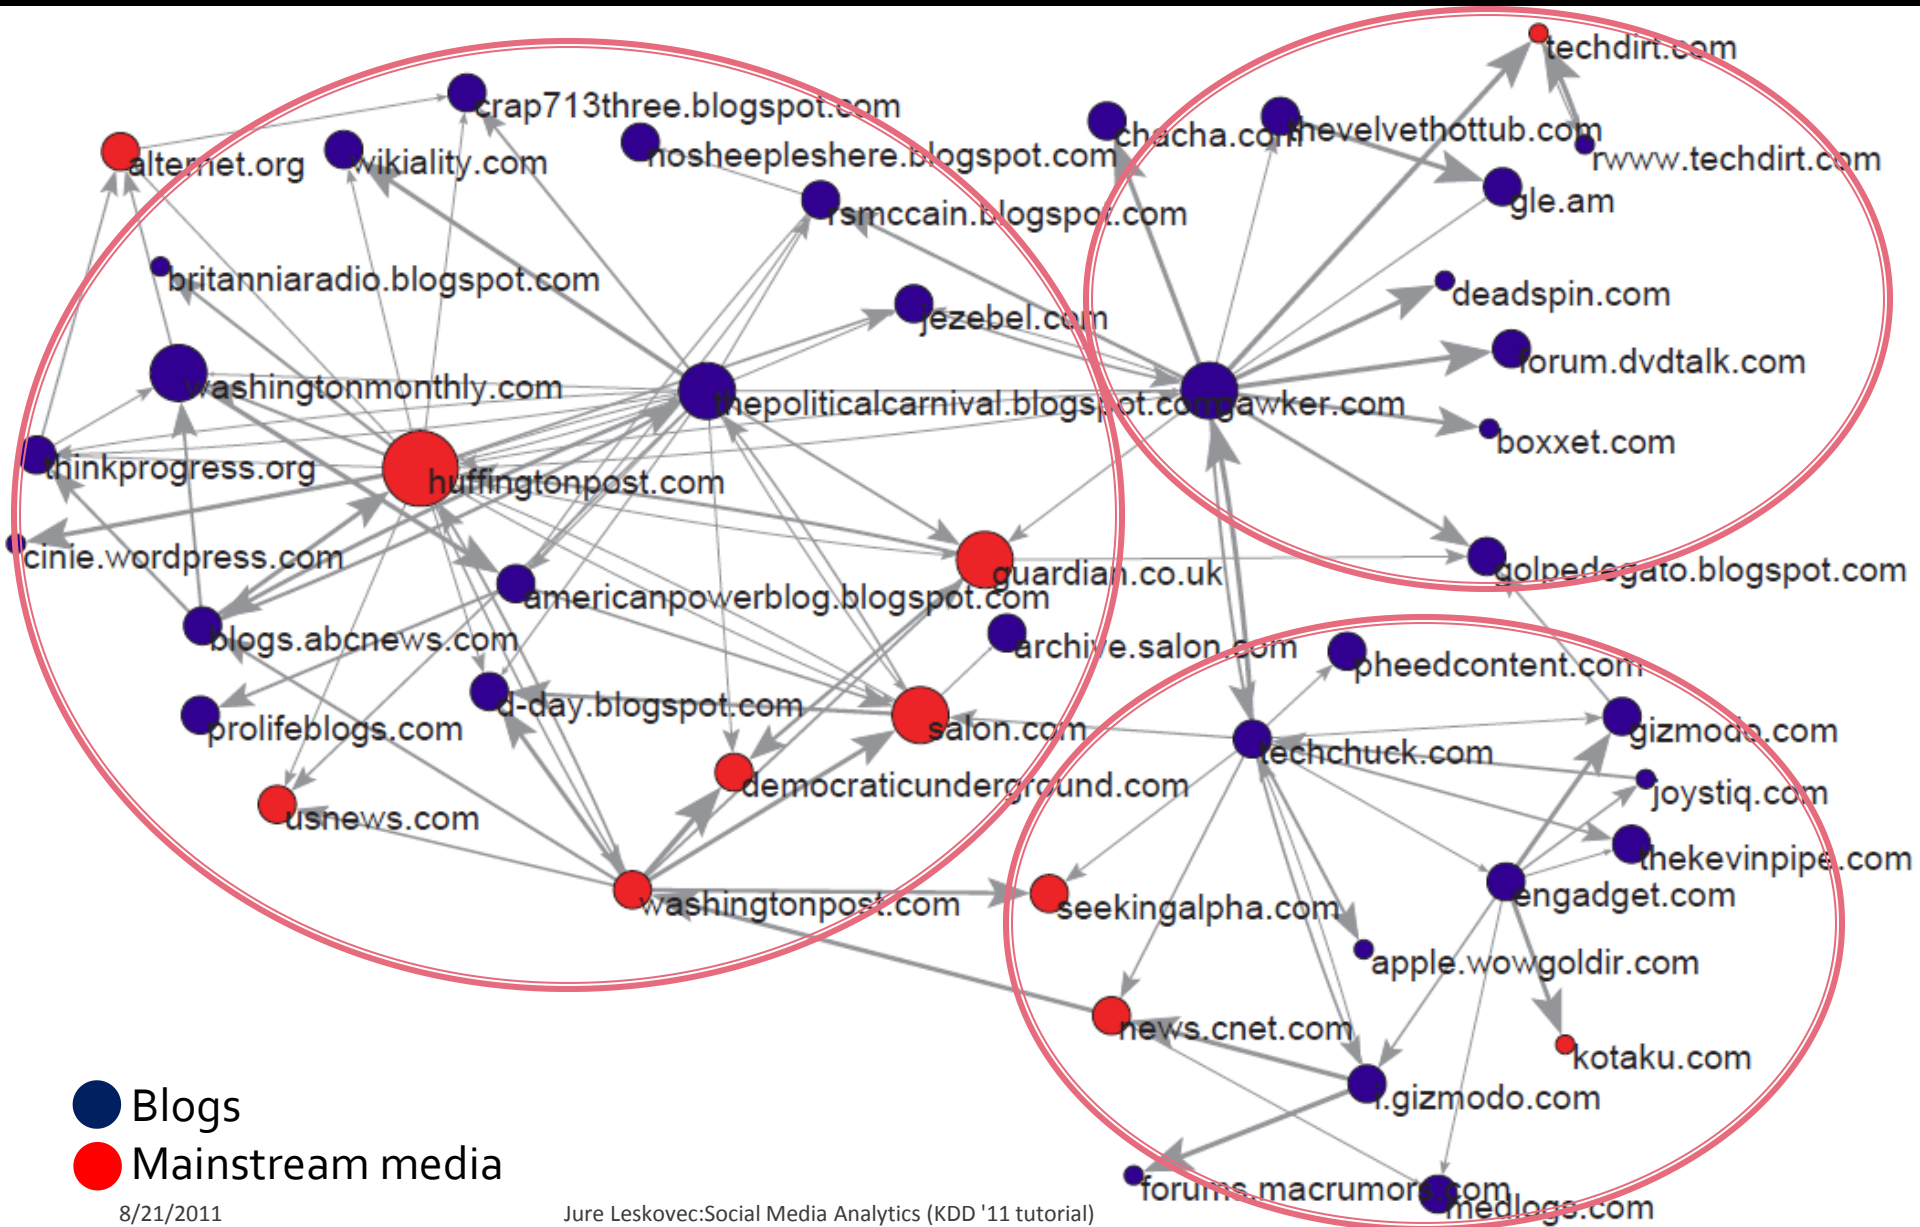

[KDD '07]

Detecting information outbreaks

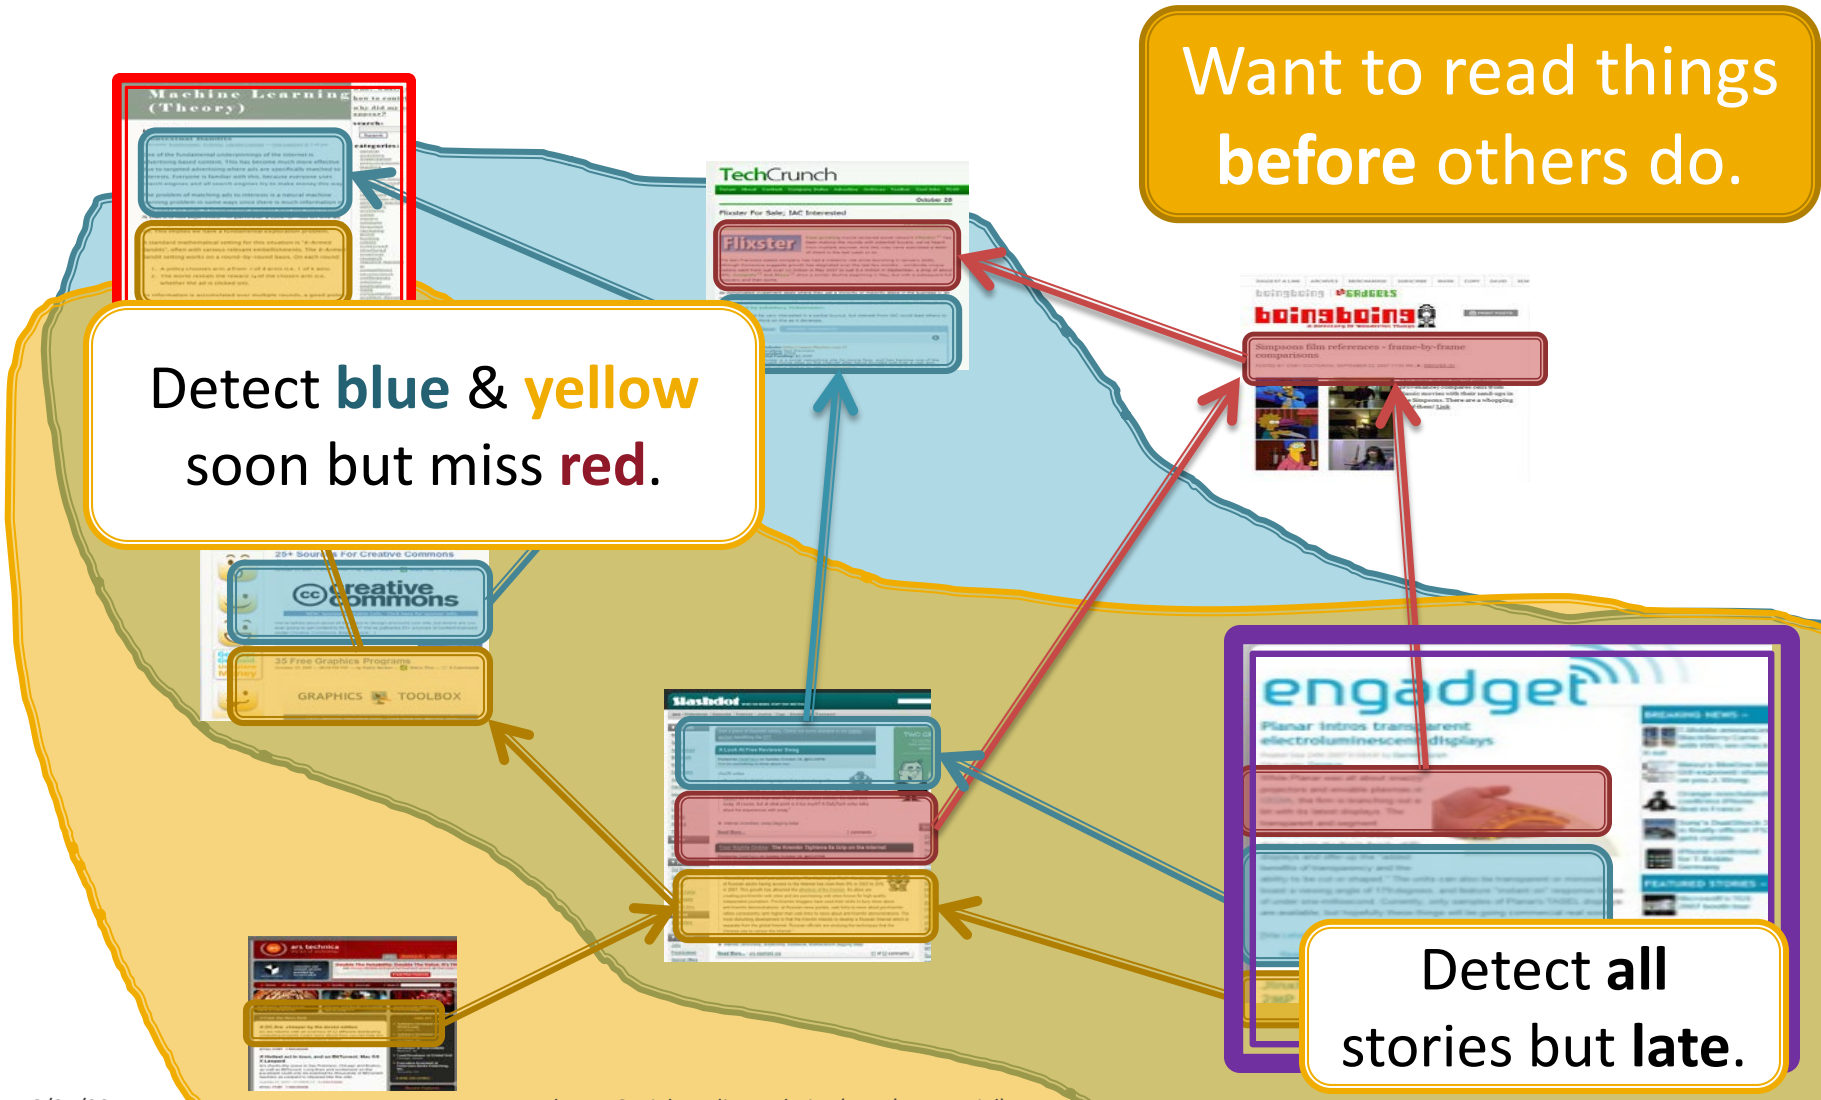

Two parts to the problem

- Cost:
  - Cost of monitoring is blog dependent (big blogs cost more time to read)
- Reward:
  - Minimize the number of people that that know the story before we do

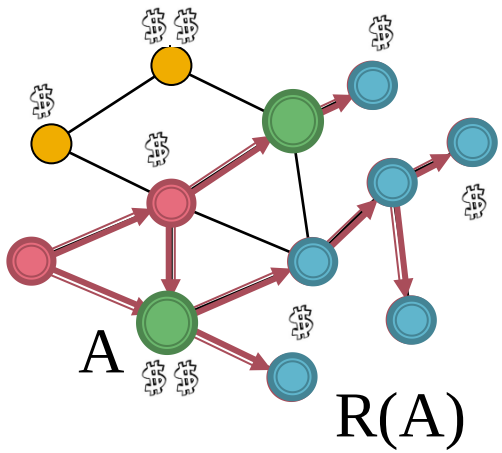

Optimization problem

- Given:
  - Graph G(V,E), budget C
  - Data on how cascades spread over time
- Select a set of nodes A maximizing the reward

$$\max_{A \subseteq V} \sum_i \text{Prob}(i) \underbrace{R_i(A)}_{\text{Reward for detecting cascade } i}$$

subject to $cost(A) \leq C$

- Solving the problem exactly is NP-hard
  - Set cover [Kuhler et al. '99]

Problem structure: Submodularity

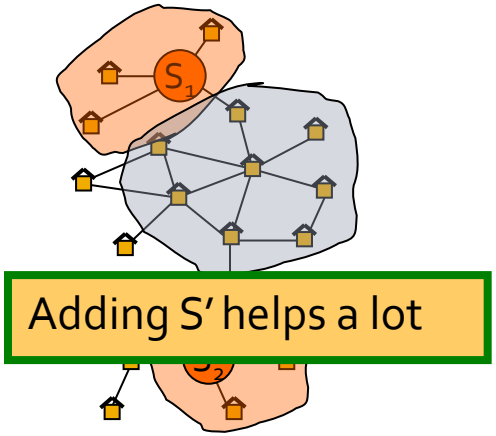

New monitored node:

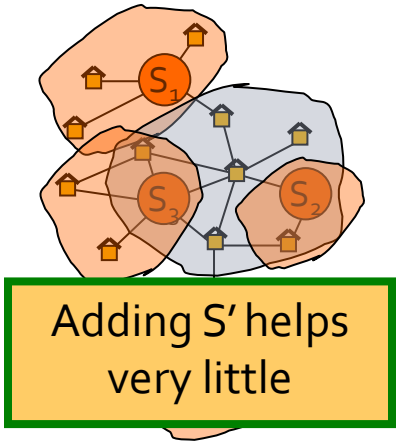



Placement A={S_1, S_2}

Placement B={S_1, S_2, S_3, S_4}

- Gain of adding a node to small set is larger than gain of adding a node to large set
- **Submodularity**: diminishing returns
- Algorithm:
  - Greedily add node that gives highest increase in reward

Problem structure: Submodularity

- We must show R is submodular: $\boldsymbol{A \subseteq B}$

$$\underbrace{R(A \cup \{u\}) - R(A)}_{\text{Gain of adding a node to a small set}} \geq \underbrace{R(B \cup \{u\}) - R(B)}_{\text{Gain of adding a node to a large set}}$$

- Natural example:
  - Sets $A_1, A_2, \ldots, A_n$
  - R(A) = size of union of A_i (size of covered area)

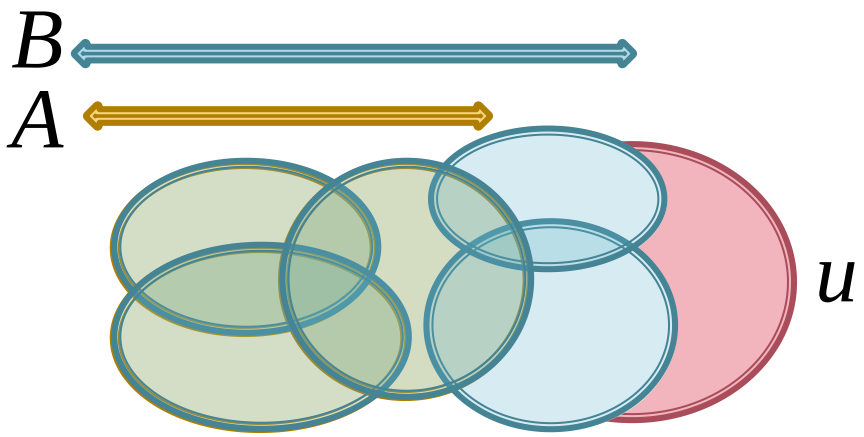

- If $R_1, \ldots, R_K$ are submodular, then $\sum R_i$ is submodular

Reward function is submodular

- Theorem:
  - Reward function is submodular
- Consider cascade *i*:
  - $R_i(u_k)$ = set of nodes saved from u_k
  - $R_i(A)$ = size of union $R_i(u_k)$, $u_k \in A$

  $\Rightarrow R_i$ is submodular
- Global optimization:
  - $R(A) = \sum R_i(A)$

  $\Rightarrow$ R is submodular

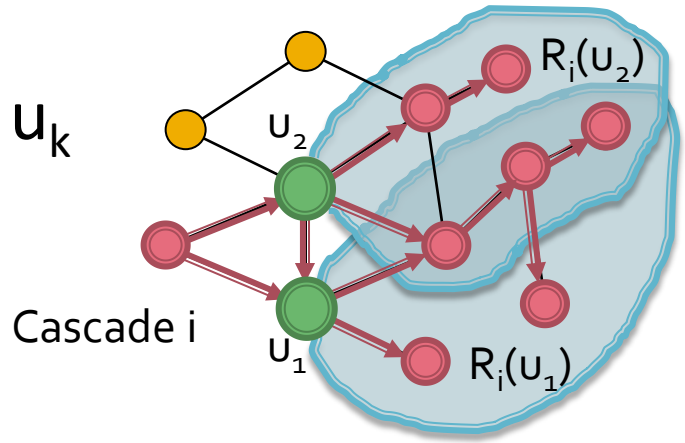

[KDD '07]

CELF Algorithm

- We develop CELF algorithm:
  - Two independent runs of a modified greedy
    - Solution set A': ignore cost, greedily optimize reward
    - Solution set A'': greedily optimize reward/cost ratio
  - Pick best of the two: *arg max(R(A'), R(A''))*

- Theorem: If *R* is submodular then CELF near optimal:

  CELF achieves *½(1-1/e)* factor approximation

CELF: Covering stories

- Given a budget (e.g., of 3 blogs)
- Select sites to cover the most of the network

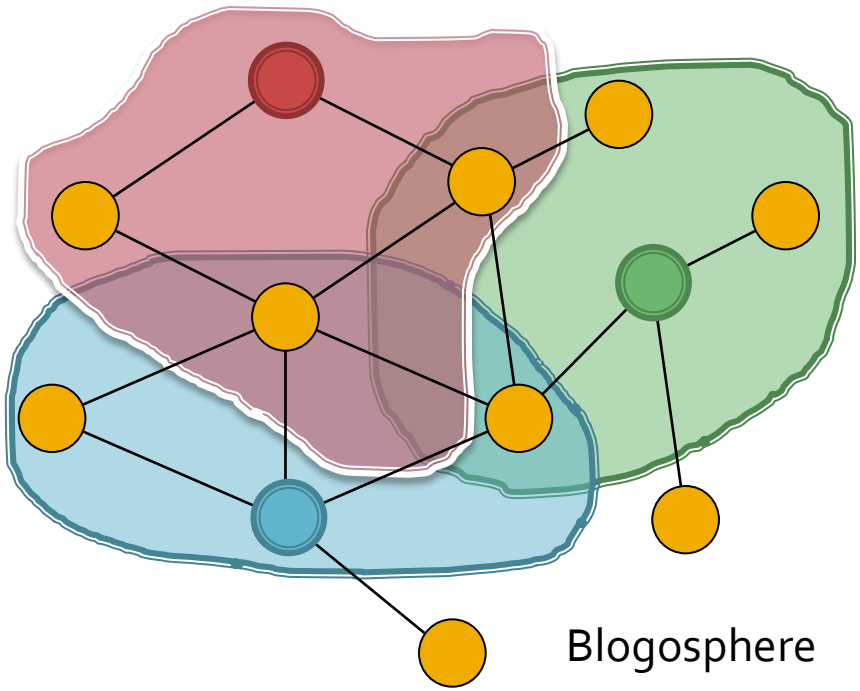

Blogs: Information epidemics

- **Question:** Which websites should one read to catch big stories?
- Idea: Each blog covers part of the network

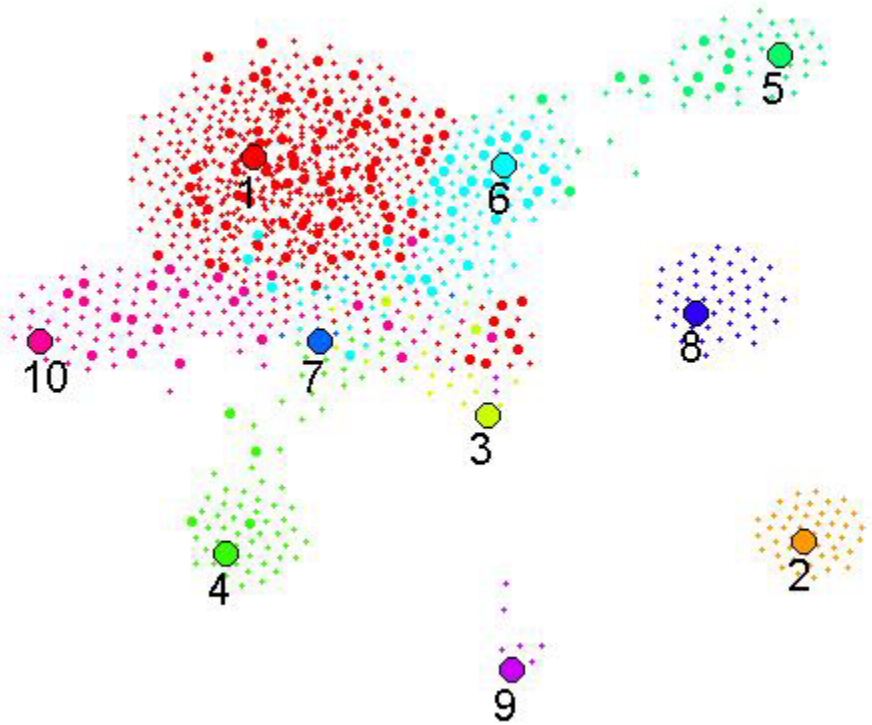

• Each dot is a blog
• Proximity is based on the number of common cascades

Experimental results

Which blogs to read to be most up to date?

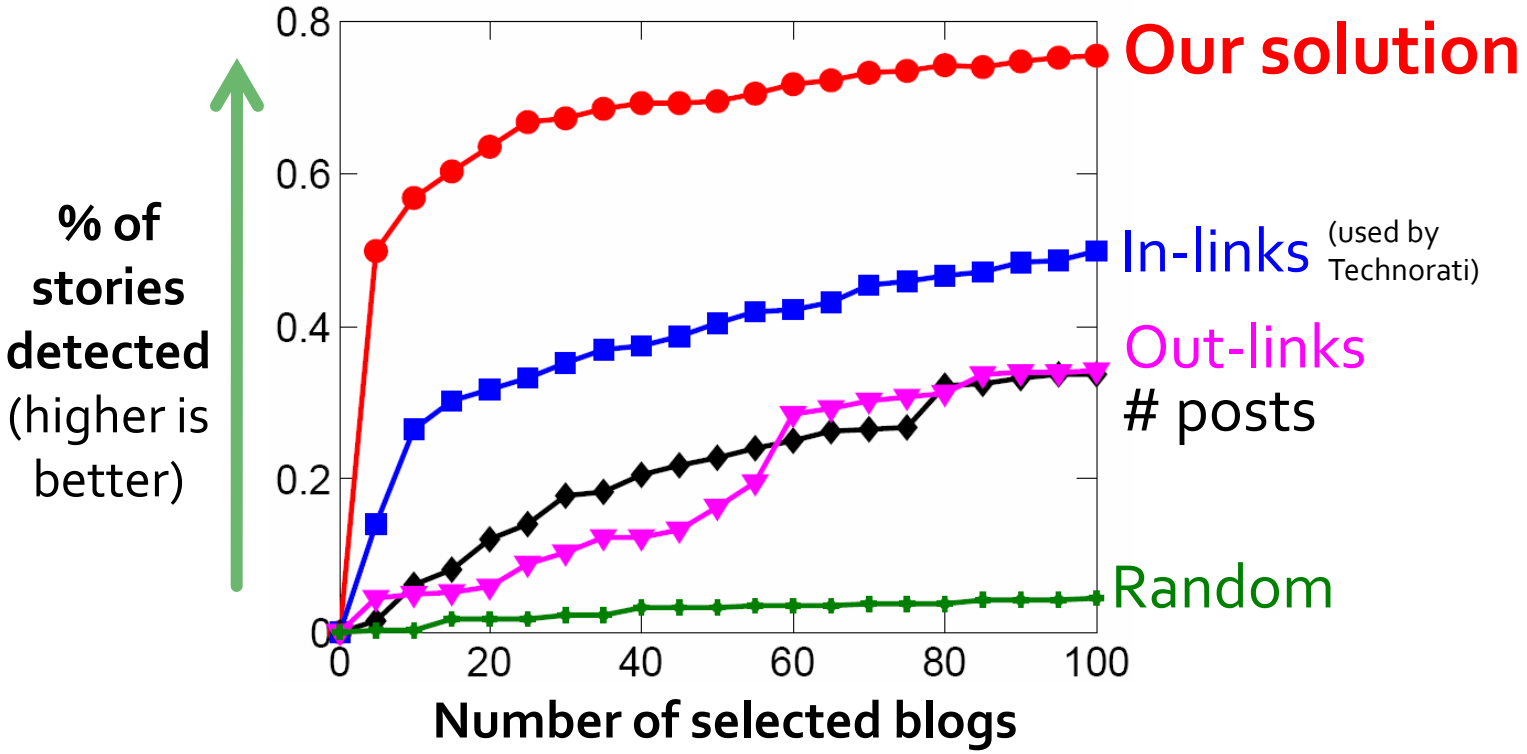

Conclusions and Connections

- Messages arriving through networks from real-time sources requires new ways of thinking about information dynamics and consumption:
  - Tracking information through (implicit) networks
  - Quantify the dynamics of online media
  - Predict the diffusion of information
  - And infer networks of information diffusion

Further Qs: Opinion dynamics

- Can this analysis help identify dynamics of polarization [Adamic-Glance '05]?
- Connections to mutation of information:
  - How does attitude and sentiment change in different parts of the network?
  - How does information change in different parts of the network?

References

- *[KDD '09] Meme-tracking and the Dynamics of the News Cycle*, by J. Leskovec, L. Backstrom, J. Kleinberg. KDD, 2009. http://cs.stanford.edu/~jure/pubs/quotes-kdd09.pdf
- *[WSDM '11] Patterns of Temporal Variation in Online Media* by J. Yang, J. Leskovec. ACM International Conference on Web Search and Data Minig (WSDM), 2011. http://cs.stanford.edu/people/jure/pubs/memeshapes-wsdm11.pdf
- *[ICDM '10] Modeling Information Diffusion in Implicit Networks* by J. Yang, J. Leskovec. IEEE International Conference On Data Mining (ICDM), 2010. http://cs.stanford.edu/people/jure/pubs/lim-icdm10.pdf
- *[KDD '10] Inferring Networks of Diffusion and Influence* by M. Gomez-Rodriguez, J. Leskovec, A. Krause. KDD, 2010. http://cs.stanford.edu/~jure/pubs/netinf-kdd2010.pdf
- *[NIPS '10] On the Convexity of Latent Social Network Inference* by S. A. Myers, J. Leskovec. Neural Information Processing Systems (NIPS), 2010. http://cs.stanford.edu/people/jure/pubs/connie-nips10.pdf
- *[KDD '07] Cost-effective Outbreak Detection in Networks* by J. Leskovec, A. Krause, C. Guestrin, C. Faloutsos, J. VanBriesen, N. Glance. KDD 2007. http://cs.stanford.edu/~jure/pubs/detect-kdd07.pdf
- *[SDM '07] Cascading Behavior in Large Blog Graphs* by J. Leskovec, M. McGlohon, C. Faloutsos, N. Glance, M. Hurst. SDM, 2007. http://cs.stanford.edu/~jure/pubs/blogs-sdm07.pdf
- [Kulkarni et al. '11] A. Kulkarni, J. Teevan, J. M. Svore, and S. T. Dumais, Understanding Temporal Query Dynamics, in *Web Search and Data Mining (WSDM) 2011*, Association for Computing Machinery, Inc., February 2011

References

- [Adar-Adamic '05] E. Adar and L. A. Adamic, Tracking Information Epidemics in Blogspace, Web Intelligence, 2005
- [Goyal et al. '10] Goyal, A., Bonchi, F. and Lakshmanan, L.V.S., Learning influence probabilities in social networks, WSDM '10
- [Kulkarni et al. '11] A. Kulkarni, J. Teevan, J. M. Svore, and S. T. Dumais, Understanding Temporal Query Dynamics, in *WSDM* 2011.
- [LibenNowell-Kleinberg '08] D. Liben-Nowell and J. Kleinberg, Tracing the Flow of Information on a Global Scale Using Internet Chain-Letter Data, PNAS 2008.
- [Cha et al. '09] Cha, M. and Mislove, Alan and Gummadi, Krishna P., A measurement-driven analysis of information propagation in the flickr social network. In WWW '09.
- [De Choudhury '10] De Choudhury, M., Lin, Y.-R., Sundaram, H., Candan, K.S., Xie, L. & Kelliher, A. *How Does the Data Sampling Strategy Impact the Discovery of Information Diffusion in Social Media?* ICWSM '10
- Gruhl, D., Guha, R., Liben-Nowell, D. & Tomkins, A. *Information Diffusion Through Blogspace.* WWW 2004.